



MLFB-Ordering data: 1LE1502-1EB43-4AA4

Motor type: 1CV1184B

Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

U [V]	Δ / Y	f [Hz]	P		I [A]	n [1/min]	M [Nm]	NOM. EFF at ... load [%]			Power factor at ... load			I _A /I _N I _f /I _N	M _A /M _N T _f /T _N	M _K /M _N T _B /T _N	IE-CL
			[kW]	[hp]				4/4	3/4	2/4	4/4	3/4	2/4				
400	Δ	50	22.00	- / -	42.50	1465	143.0	89.9	90.8	90.7	0.83	0.78	0.67	8.0	2.7	3.6	IE1
690	Y	50	22.00	- / -	24.50	1465	143.0	89.9	90.8	90.7	0.83	0.78	0.67	8.0	2.7	3.6	IE1
460	Δ	60	25.30	- / -	41.50	1765	137.0	91.0	91.7	91.5	0.84	0.79	0.69	8.2	2.7	3.6	IE1
IM B3 / IM 1001			FS 180 L		170 kg	IP55	IEC/EN 60034			IEC, DIN, ISO, VDE, EN							

Mechanical data

Sound pressure level 50Hz/60Hz (load)	63 dB(A) ¹⁾	66 dB(A) ¹⁾
Moment of inertia	0.13 kg m ²	
Bearing DE NDE	6210 Z C3	6210 Z C3
Bearing lifetime	40000 h	
Lubricants	Esso Unirex N3	
Regreasing device	No	
Grease nipple	- / -	
Type of bearing	Locating bearing NDE	
Condensate drainage holes	Yes (standard)	
External earthing terminal	Yes (standard)	
Vibration severity grade	A	
Insulation	155(F) to 130(B)	
Duty type	S1	
Direction of rotation	bidirectional	
Frame material	cast iron	
Data of anti condensation heating	-/-	
Coating (paint finish)	Standard paint finish C2	
Color, paint shade	RAL7030	
Motor protection	(A) without (Standard)	
Method of cooling	IC411 - self ventilated, surface cooled	

Environmental conditions

Ambient temperature	-20 °C - +40 °C
Altitude above sea level	1000 m

Notes

I_A¹⁾ = locked rotor current / current nominal M_K/M_N = break down torque / nominal torque
M_A/M_N = locked rotor torque / torque nominal 1) Value is valid only for DOL operation with motor design IC411

Terminal box

Terminal box position	top
Material of terminal box	cast iron
Type of terminal box	TB1 J01
Contact screw thread	M5
Max. cross-sectional area	16.0 mm ²
Cable diameter from ... to ...	19.0 mm - 28.0 mm
Cable entry	2xM40x1,5
Cable gland	2 plugs

Special design (0)

Tel: 48 0000 49 (60 Lines)


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for any damages caused by their actions. Patent, trademark, copyright or other rights of a utility model or design patent are reserved.

Weitergabe sowie Vervielfältigung, Verbreitung und/oder Bearbeitung dieses Dokuments, Verwertung und Mitteilung seines Inhaltes sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten.

Confidat a titre de secret d'entreprise. Toute autre révélation, communication à l'extérieur, reproduction ou modification de ce document, sans autorisation écrite préalable, est formellement interdite.

Confidado como secreto de empresa. Nos reservamos todos los derechos.

Copyright © Siemens AG 2018

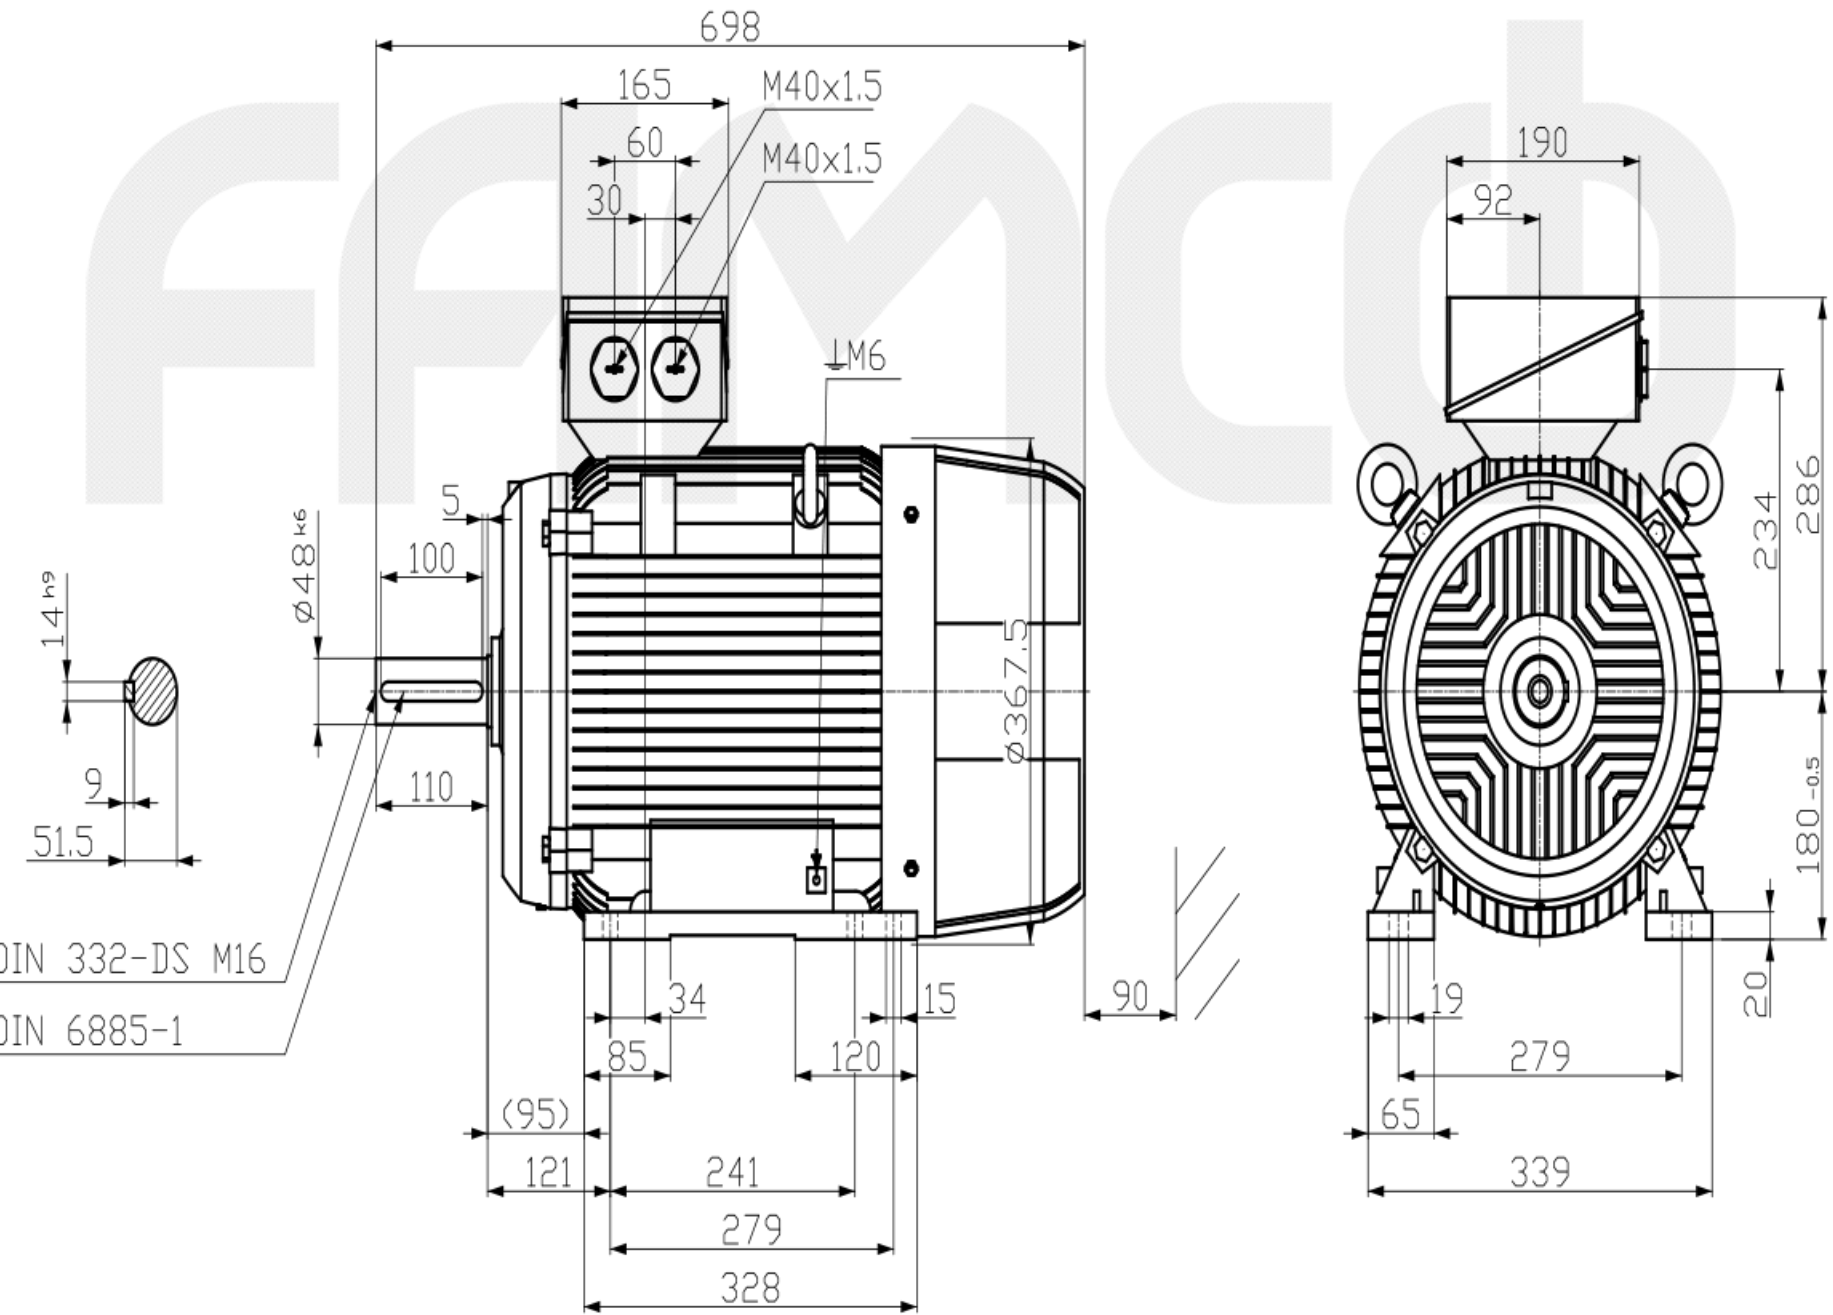

DIN 332-DS M16
 DIN 6885-1

Tel: 48 0000 49 (60 Lines)

Tolerance	Surface	Material	Weight	Scale
			-	mm
1LE1502-1EB43-4AA4	Author	Dimensional drawing		
	Creator	Maßzeichnung		
	Approval	DTK		
	Department			
	Change Order	MFB	Doc. Type	
	Doc. State	1/21/19	Item No	Pager Size A3
	Revision	Index RS	Doc. No	1st Language en
				2nd Language de
© Siemens AG 2018	Project No	-	Ref No	Sheet 1 of 1