

System overview

Basic units and accessories

Miniature circuit breakers for basic applications



Miniature circuit breakers for advanced applications



Device protection switches for advanced applications



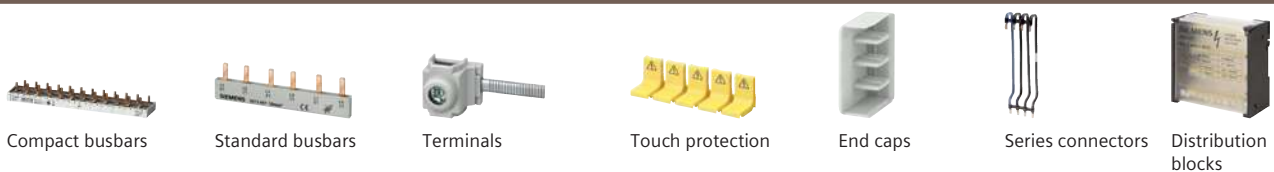
Electrical accessories



Mechanical accessories



Busbars and accessories



Note:

You will find a detailed range of accessories with the basic units and in the Accessories section.

Miniature circuit breakers

For basic applications for buildings and infrastructure


5SL3

5SL6

Standards			
Standards		IEC / EN 60898-1	IEC / EN 60898-1
Basic data			
Breaking capacity I_{cn} for AC (230/400 V) acc. to IEC / EN 60898-1 AC		kA	4.5
Rated current		A	0.3 ... 63
Number of poles			1P 2P 3P 4P 1P+N 3P+N
Tripping characteristic			B C
Approvals			
General product approvals		VDE, CEBC, TSE	VDE, CEBC, TSE
Marine classifications		–	–
Operational voltage			
Max. AC, acc. to EN 60898-1/-2, EN 60947-2		V	250/440
Max. DC per pole, acc. to EN 60898-1/-2, EN 60947-2		V	72
Max. AC, acc. to UL 1077, CSA C22.2 No.235		V	–
Rated voltage AC, acc. to UL 489		V	–
Rated impulse withstand voltage U_{imp}		kV	4
Rated frequency f_n		Hz	50/60
Connection			
Dual-chamber terminal		–	–
Conductor cross-section 1 wire	Solid/stranded	mm ²	0.75 ... 35
	Finely stranded with end sleeve	mm ²	0.75 ... 25
	Finely stranded without end sleeve	mm ²	1 ... 35
Conductor cross-section 2 wires (same cross-section and same conductor type)	Solid/stranded	mm ²	0.75 ... 10
	Finely stranded with end sleeve	mm ²	0.75 ... 4
	Finely stranded without end sleeve	mm ²	1 ... 4
Conductor cross-section 1-wire + busbar (pin thickness 1.5 mm)	Solid/stranded	mm ²	10 ... 25
	Finely stranded with non-insulated end sleeve	mm ²	6 ... 25
	Finely stranded with insulated end sleeve	mm ²	6 ... 16
Ambient conditions			
Ambient temperature		°C	–25 ... +45 ¹⁾
Storage temperature		°C	–40 ... +75 ³⁾
Shock acc. to IEC 60068-2-27 150 m/s ² at 11 ms half-sine		–	–
Resistance to vibrations acc. to IEC 60068-2-6 50 m/s ² at 25 ... 150 Hz and 60 m/s ² at 35 Hz (4 s)		–	–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)		–	–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)		–	–
Pollution degree for overvoltage category			2/III
More information			
Catalog LV 10 – 10/2020		See page 3/12	See page 3/14

¹⁾ Periodically +55 °C, max. 95% humidity

²⁾ Max. 95% humidity

³⁾ 95% humidity up to 55 °C

**5SL4****5SJ6...-KS****5SL30****5SL60****5SP3**

IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1	DIN VDE 0641-21
10	6	4.5	6	–
0.3 ... 63	10 ... 20	2 ... 40	2 ... 40	16 ... 63
1P 2P 3P 4P 1P+N 3P+N	1P 2P 3P 1P+N	1P+N	1P+N	1P 2P 3P 4P
B C D	B C	C	B C	E
VDE, CEBC, IMQ	VDE	VDE, IMQ, NF, CCC	VDE, IMQ, NF, CCC	VDE
–	–	–	DNV-GL	–
250/440	250/440	250	250	–
72	60	72	72	–
–	–	–	–	–
–	–	–	–	–
4	4	4	4	4
50/60	50/60	50/60	50/60	50/60
–	Plug-in terminal on outgoing side	–	–	–
0.75 ... 35	1.5 ... 4 (top) 0.75 ... 25 (bottom)	0.75 ... 16	0.75 ... 16	2.5 ... 50 (bottom)
0.75 ... 25	1.5 ... 2.5 (top) 0.75 ... 25 (bottom)	0.75 ... 10	0.75 ... 10	2.5 ... 50 (bottom)
1 ... 35	1.5 ... 4	–	–	2.5 ... 16 (top)
0.75 ... 10	–	–	–	–
0.75 ... 4	–	–	–	–
1 ... 4	–	–	–	–
10 ... 25	–	–	–	–
6 ... 25	–	–	–	–
6 ... 16	–	–	–	–
–25 ... +55 ²⁾	–25 ... +45 ¹⁾	–25 ... +60	–25 ... +60	–25 ... +55
–40 ... +75 ³⁾	–40 ... +75 ³⁾	–40 ... +75	–40 ... +75	–40 ... +70
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
2/III	2/III	2/III	2/III	3/IV
See page 3/16	See page 3/18	See page 3/20	See page 3/22	See page 3/38

Miniature circuit breakers

For advanced applications for buildings and infrastructure and for industry and machine manufacturing



5SY6



5SY4

Standards

Standards

 IEC/EN 60898-1
 IEC/EN 60947-2
 UL 1077

 IEC/EN 60898-1
 IEC/EN 60947-2
 UL 1077

Basic data

Breaking capacity I_{cn}	For AC (230/400 V) acc. to IEC/EN 60898-1 AC Acc. to UL1077 and CSA C22.2 No.235	kA	6	10
		SC	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C U2: see Certificate of Compliance	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C U2: see Certificate of Compliance
Rated breaking capacity I_{cu} acc. to IEC/EN 60947-2 at U_e 230 V at U_e 400 V (1P, 1P+N) (2P, 3P, 4P, 3P+N)	I_n 0.3 ... 2 A	kA	30 30	35 35
	I_n 3 ... 6 A	kA	30 30	35 35
	I_n 8 ... 10 A	kA	15 15	20 20
	I_n 13 ... 32 A	kA	15 15	20 20
	I_n 40 A	kA	10 10	15 15
	I_n 50 ... 63 A	kA	10 10	15 15
	I_n 80 ... 125 A	kA	– –	10 10
Rated current		A	0.3 ... 63	0.3 ... 80
Number of poles			1P 2P 3P 4P 1P+N 3P+N	1P 2P 3P 4P 1P+N 3P+N
Tripping characteristic			B C	A B C D

Approvals

General product approvals

 VDE, IMQ, CCC,

 VDE, IMQ, CCC,

Marine classifications

DNV-GL, LR, BV, RINA, ABS

DNV-GL, LR, BV, RINA, ABS

Operational voltage

Max. AC	Acc. to EN 60898-1/-2, EN 60947-2	V	250/440	250/440
	Acc. to UL 1077, CSA C22.2 No.235	V	277/480	277/480
Max. DC per pole	Acc. to EN 60898-1/-2, EN 60947-2	V	72 ¹⁾	72 ¹⁾
Rated voltage AC	Acc. to UL 489	V	–	–
Rated impulse withstand voltage U_{imp}		kV	4	4
Rated frequency f_n		Hz	50/60	50/60

Connection

Dual-chamber terminal			■	■
Conductor cross-section	Solid/stranded	mm ²	0.75 ... 35	0.75 ... 35
1 wire	Finely stranded, with end sleeve	mm ²	0.75 ... 25	0.75 ... 25
	Conductors (Cu 60/75 °C I_n ≤ 40 A; 60 °C I_n > 40 A)		AWG 18 ... 4	AWG 18 ... 4
Terminal tightening torque		Nm	2.5 ... 3.5 max.	2.5 ... 3.5 max.
		lb-in	22 ... 26	22 ... 26

Ambient conditions

Ambient temperature	°C	–25 ... +55 ⁴⁾	–40 ... +70 ³⁾
Storage temperature	°C	–40 ... +75 ³⁾	–40 ... +75 ³⁾
Shock acc. to IEC 60068-2-27 150 m/s ² at 11 ms half-sine		■	■
Resistance to vibrations acc. to IEC 60068-2-6 50 m/s ² at 25 ... 150 Hz and 60 m/s ² at 35 Hz (4 s)		■	■
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)		–	■
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)		–	■
Pollution degree for overvoltage category		3/III	3/III ²⁾

More information

Catalog LV 10 – 10/2020

See page 3/24

See page 3/26

¹⁾ Exempt: C/D 0.3 A ... 0.5 A

²⁾ 5SY4... 4-pole, degree of pollution 2 for overvoltage category II

³⁾ 95% humidity up to 55 °C
 95% rel. humidity up to +55 °C
 55% rel. humidity up to +70 °C

⁴⁾ Max. 95% humidity

⁵⁾ When used with a busbar at the front or 2 conductors, the terminal area at the rear is restricted, see notes on the Internet

**5SP4****5SY5****5SY7****5SY8****5SJ4..HG..**

IEC/EN 60898-1 UL 1077	IEC/EN 60898-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 489
10	10	15	25	–
Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	–
U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	–
– –	– –	50 50	70 70	10
– –	– –	40 40	50 50	10
– –	– –	30 30	40 40	10
– –	– –	25 25	30 30	10
– –	– –	20 20	25 25	10
– –	– –	15 15	20 20	10
10 10	– –	– –	– –	–
80 ... 125	0.3 ... 63	0.3 ... 63	0.3 ... 63	0.3 ... 63
1P 2P 3P 4P	1P 2P 4P	1P 2P 3P 4P 1P+N 3P+N	1P 2P 3P 4P 1P+N 3P+N	1P 2P 3P
B C D	B C	B C D	C D	B C D
VDE, CCC, 	VDE, CCC, 	VDE, IMQ, CCC, 		VDE, CCC, 
LR	ABS	DNV-GL, LR, BV, RINA, ABS	ABS	–
250/440	250/440	250/440	250/440	250/440
277/480	–	277/480	277/480	–
72	250	72 ¹⁾	72 ¹⁾	60
–	–	–	–	277/480
4	4	4	4	4
50/60	50/60	50/60	50/60	50/60
–	■	■	■	■
10 ... 50	0.75 ... 35	0.75 ... 35	0.75 ... 35	0.75 ... 25 (16) ⁵⁾
10 ... 35	0.75 ... 25	0.75 ... 25	0.75 ... 25	0.75 ... 25 (10)
AWG 3 ... 1	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4 (5)
2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.
22 ... 31	22 ... 26	22 ... 26	22 ... 26	22 ... 26
–25 ... +55 ⁴⁾	–40 ... +70 ³⁾	–40 ... +70 ³⁾	–25 ... +55 ⁴⁾	–25 ... +55 ⁴⁾
–40 ... +75 ³⁾	–40 ... +75 ³⁾	–40 ... +75 ³⁾	–40 ... +75 ³⁾	–40 ... +75 ³⁾
–	■	■	–	■
■	■	■	■	■
–	■	■	–	–
■	■	■	–	–
3/III	3/III	3/III	3/III	3/III
See page 3/28	See page 3/30	See page 3/32	See page 3/34	See page 3/36

Device protection switches

For advanced applications for industry and machine manufacturing


5SY17

Standards

Standards

IEC 60934
UL 1077

Basic data

Breaking capacity I_{cn}	for AC (230/400 V) acc. to IEC/EN 60898-1 AC	kA	3
Rated current		A	0.5 ... 16
Number of poles			1P+AS
DC tripping	Magnetic		F1 (2.5 ... $4 \times I_n$) F2 (4 ... $7 \times I_n$)
	Thermal		1.05 × holding current 1.35 × tripping current TC3 1.35 × I_n
	Electronic		–
Service life	Actuations		6000

Approvals

General product approvals

CCC,
cULus

Operational voltage

Max. AC	Acc. to EN 60898-1/-2, EN 60947-2	V	250
	Acc. to UL 1077, CSA C22.2 No.235	V	277
Max. DC per pole		V	72
Rated impulse withstand voltage U_{imp}		kV	4
Rated frequency f_n		Hz	50/60

Connection

Dual-chamber terminal			–
Conductor cross-section 1 wire	Solid/stranded	mm ²	0.75 ... 16
	Finely stranded with end sleeve	mm ²	0.75 ... 10
	Finely stranded with insulated end sleeve	mm ²	0.75 ... 10
	Finely stranded without end sleeve	mm ²	0.75 ... 16
	Conductor cross-section AWG		–
2-wire (same cross-section)	Solid/stranded	mm ²	0.75 ... 4
	Finely stranded with end sleeve	mm ²	0.75 ... 2.5
	Finely stranded with insulated end sleeve	mm ²	0.75 ... 1.5
	Finely stranded without end sleeve	mm ²	0.75 ... 4
Terminal tightening torque		Nm	2.0 ... 2.5 max.
		lb-in	17.7 ... 22.1

Ambient conditions

Ambient temperature	°C	–25 ... +60
Storage temperature	°C	–40 ... +70
Shock acc. to IEC 60068-2-27 150 m/s ² at 11 ms half-sine		–
Resistance to vibrations acc. to IEC 60068-2-6 50 m/s ² at 25 ... 150 Hz and 60 m/s ² at 35 Hz (4 s)		–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)		–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)		–
Pollution degree for overvoltage category	Acc. to IEC	2/III

More information

Catalog LV 10 – 10/2020

See page 3/40

¹⁾ Max. 95% humidity



5SK9

EN 61000-6-2, EN 61000-6-3, EN 60068-2-78,
EN 50178, EN 60068-2-6, EN 60068-2-27,
UL 508, UL 2367

—

1 ... 8

1P+AS

—

—

Overload $1.2 \times I_n / 1s$ | Short-circuit $2 \times I_n / <10 ms$

—



—

—

30

0.5

—

—

0.2 ... 4

0.2 ... 2.5

0.2 ... 2.5

—

AWG 24 ... 12

—

—

—

—

—

—

–25 ... +60 ¹⁾

–40 ... +70

—

—

—

—





—

See page 3/41

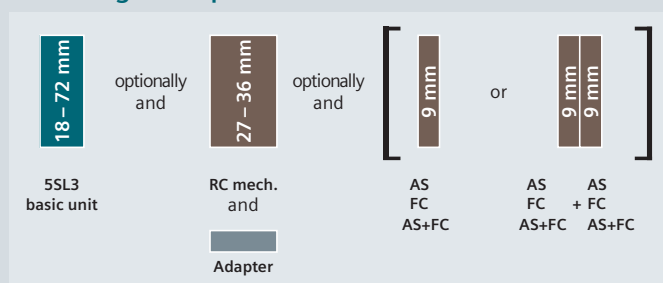
5SL3 miniature circuit breakers

4.5 kA

3

	1P 230/400 V AC	1P+N 230 V AC	2P 400 V AC	3P 400 V AC				
Mounting width	1 MW 	2 MW 	2 MW 	3 MW 				
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SL3114-7	–	5SL3514-7	–	5SL3214-7	–	–
0.5 A	–	5SL3105-7	–	5SL3505-7	–	5SL3205-7	–	–
1 A	–	5SL3101-7	–	5SL3501-7	–	5SL3201-7	–	5SL3301-7
1.6 A	–	5SL3115-7	–	5SL3515-7	–	5SL3215-7	–	–
2 A	–	5SL3102-7	–	5SL3502-7	–	5SL3202-7	–	5SL3302-7
3 A	–	5SL3103-7	–	5SL3503-7	–	5SL3203-7	–	5SL3303-7
4 A	–	5SL3104-7	–	5SL3504-7	–	5SL3204-7	–	5SL3304-7
6 A	5SL3106-6	5SL3106-7	5SL3506-6	5SL3506-7	5SL3206-6	5SL3206-7	5SL3306-6	5SL3306-7
8 A	–	5SL3108-7	–	5SL3508-7	–	5SL3208-7	–	–
10 A	5SL3110-6	5SL3110-7	5SL3510-6	5SL3510-7	5SL3210-6	5SL3210-7	5SL3310-6	5SL3310-7
13 A	5SL3113-6	5SL3113-7	5SL3513-6	5SL3513-7	5SL3213-6	5SL3213-7	–	–
16 A	5SL3116-6	5SL3116-7	5SL3516-6	5SL3516-7	5SL3216-6	5SL3216-7	5SL3316-6	5SL3316-7
20 A	5SL3120-6	5SL3120-7	5SL3520-6	5SL3520-7	5SL3220-6	5SL3220-7	5SL3320-6	5SL3320-7
25 A	5SL3125-6	5SL3125-7	5SL3525-6	5SL3525-7	5SL3225-6	5SL3225-7	5SL3325-6	5SL3325-7
32 A	5SL3132-6	5SL3132-7	5SL3532-6	5SL3532-7	5SL3232-6	5SL3232-7	5SL3332-6	5SL3332-7
40 A	5SL3140-6	5SL3140-7	5SL3540-6	5SL3540-7	5SL3240-6	5SL3240-7	5SL3340-6	5SL3340-7
50 A	5SL3150-6	5SL3150-7	5SL3550-6	5SL3550-7	5SL3250-6	5SL3250-7	5SL3350-6	5SL3350-7
63 A	5SL3163-6	5SL3163-7	5SL3563-6	5SL3563-7	5SL3263-6	5SL3263-7	5SL3363-6	5SL3363-7

Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 RC mech. Remote controlled mechanisms


[See page 3/44](#)
[See page 3/46](#)
[See page 3/47](#)
[See page 3/50](#)



3P+N

400 V AC


4 MW



4P

400 V AC

4 MW



Characteristic

B

C

–	–
–	–
–	5SL3601-7
–	–
–	5SL3602-7
–	5SL3603-7
–	5SL3604-7
5SL3606-6	5SL3606-7
–	5SL3608-7
5SL3610-6	5SL3610-7
5SL3613-6	5SL3613-7
5SL3616-6	5SL3616-7
5SL3620-6	5SL3620-7
5SL3625-6	5SL3625-7
5SL3632-6	5SL3632-7
5SL3640-6	5SL3640-7
5SL3650-6	5SL3650-7
5SL3663-6	5SL3663-7

Characteristic

B

C

–	–
–	–
–	5SL3401-7
–	–
–	5SL3402-7
–	5SL3403-7
–	5SL3404-7
–	5SL3406-7
–	–
–	5SL3410-7
–	5SL3413-7
–	5SL3416-7
–	5SL3420-7
–	5SL3425-7
–	5SL3432-7
–	5SL3440-7
–	5SL3450-7
–	5SL3463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022

Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-6
3–4 MW		5ST3820-7

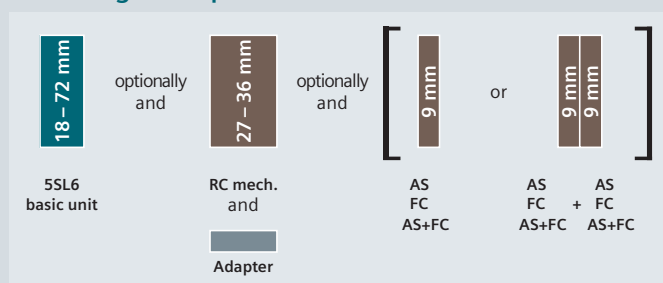
5SL6 miniature circuit breakers

6 kA

3

	1P 230/400 V AC	1P+N 230 V AC	2P 400 V AC	3P 400 V AC				
Mounting width	1 MW 	2 MW 	2 MW 	3 MW 				
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SL6114-7	–	5SL6514-7	–	5SL6214-7	–	5SL6314-7
0.5 A	–	5SL6105-7	–	5SL6505-7	–	5SL6205-7	–	5SL6305-7
1 A	–	5SL6101-7	–	5SL6501-7	–	5SL6201-7	–	5SL6301-7
1.6 A	–	5SL6115-7	–	5SL6515-7	–	5SL6215-7	–	5SL6315-7
2 A	5SL6102-6	5SL6102-7	–	5SL6502-7	–	5SL6202-7	–	5SL6302-7
3 A	–	5SL6103-7	–	5SL6503-7	–	5SL6203-7	–	5SL6303-7
4 A	5SL6104-6	5SL6104-7	–	5SL6504-7	–	5SL6204-7	–	5SL6304-7
6 A	5SL6106-6	5SL6106-7	5SL6506-6	5SL6506-7	5SL6206-6	5SL6206-7	5SL6306-6	5SL6306-7
8 A	–	5SL6108-7	–	5SL6508-7	–	5SL6208-7	–	5SL6308-7
10 A	5SL6110-6	5SL6110-7	5SL6510-6	5SL6510-7	5SL6210-6	5SL6210-7	5SL6310-6	5SL6310-7
13 A	5SL6113-6	5SL6113-7	5SL6513-6	5SL6513-7	5SL6213-6	5SL6213-7	5SL6313-6	5SL6313-7
16 A	5SL6116-6	5SL6116-7	5SL6516-6	5SL6516-7	5SL6216-6	5SL6216-7	5SL6316-6	5SL6316-7
20 A	5SL6120-6	5SL6120-7	5SL6520-6	5SL6520-7	5SL6220-6	5SL6220-7	5SL6320-6	5SL6320-7
25 A	5SL6125-6	5SL6125-7	5SL6525-6	5SL6525-7	5SL6225-6	5SL6225-7	5SL6325-6	5SL6325-7
32 A	5SL6132-6	5SL6132-7	5SL6532-6	5SL6532-7	5SL6232-6	5SL6232-7	5SL6332-6	5SL6332-7
40 A	5SL6140-6	5SL6140-7	5SL6540-6	5SL6540-7	5SL6240-6	5SL6240-7	5SL6340-6	5SL6340-7
50 A	5SL6150-6	5SL6150-7	5SL6550-6	5SL6550-7	5SL6250-6	5SL6250-7	5SL6350-6	5SL6350-7
63 A	5SL6163-6	5SL6163-7	5SL6563-6	5SL6563-7	5SL6263-6	5SL6263-7	5SL6363-6	5SL6363-7

Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 RC mech. Remote controlled mechanisms

[See page 3/44](#)
[See page 3/46](#)
[See page 3/47](#)
[See page 3/50](#)



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
B	C	B	C
–	5SL6614-7	–	5SL6414-7
–	5SL6605-7	–	5SL6405-7
–	5SL6601-7	–	5SL6401-7
–	5SL6615-7	–	5SL6415-7
–	5SL6602-7	–	5SL6402-7
–	5SL6603-7	–	5SL6403-7
–	5SL6604-7	–	5SL6404-7
5SL6606-6	5SL6606-7	5SL6406-6	5SL6406-7
–	5SL6608-7	–	5SL6408-7
5SL6610-6	5SL6610-7	5SL6410-6	5SL6410-7
5SL6613-6	5SL6613-7	5SL6413-6	5SL6413-7
5SL6616-6	5SL6616-7	5SL6416-6	5SL6416-7
5SL6620-6	5SL6620-7	5SL6420-6	5SL6420-7
5SL6625-6	5SL6625-7	5SL6425-6	5SL6425-7
5SL6632-6	5SL6632-7	5SL6432-6	5SL6432-7
5SL6640-6	5SL6640-7	5SL6440-6	5SL6440-7
5SL6650-6	5SL6650-7	5SL6450-6	5SL6450-7
5SL6663-6	5SL6663-7	5SL6463-6	5SL6463-7



Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022

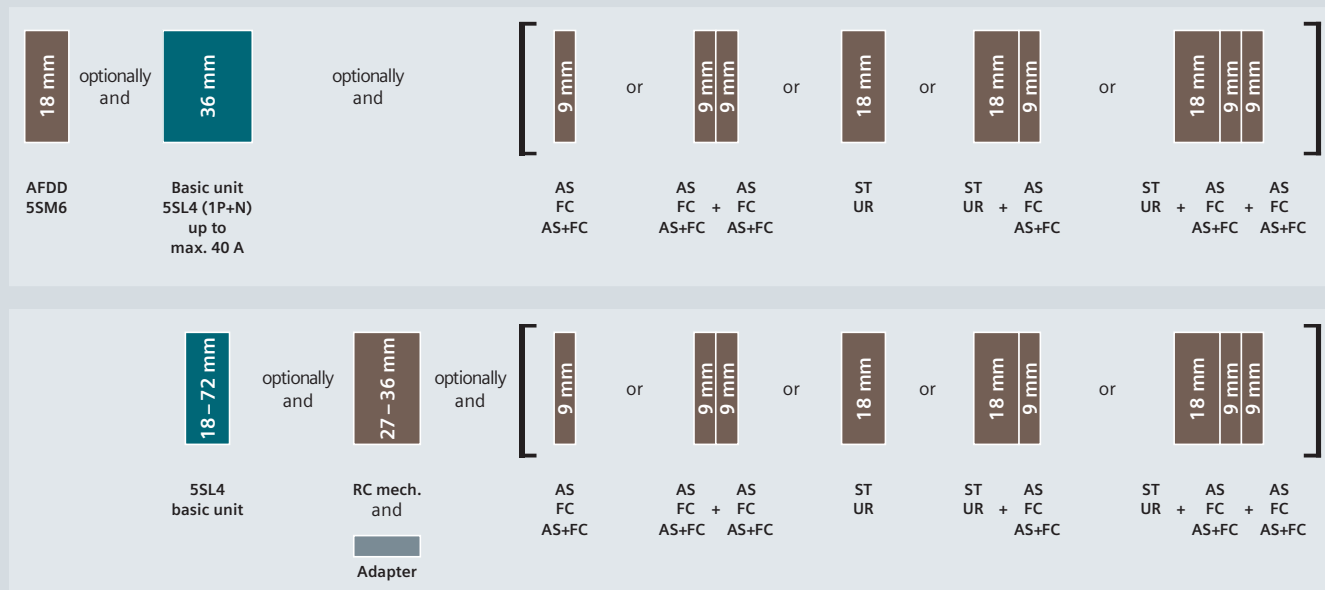
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-6
3–4 MW		5ST3820-7

5SL4 miniature circuit breakers

10 kA

Mounting width	1P 230/400 V AC			1P+N 230 V AC			2P 400 V AC		
	1 MW			2 MW			2 MW		
									
Rated current I_n	Characteristic			Characteristic			Characteristic		
	B	C	D	B	C	D	B	C	D
0.3 A	–	5SL4114-7	5SL4114-8	–	5SL4514-7	5SL4514-8	–	5SL4214-7	5SL4214-8
0.5 A	–	5SL4105-7	5SL4105-8	–	5SL4505-7	5SL4505-8	–	5SL4205-7	5SL4205-8
1 A	5SL4101-6	5SL4101-7	5SL4101-8	5SL4501-6	5SL4501-7	5SL4501-8	5SL4201-6	5SL4201-7	5SL4201-8
1.6 A	–	5SL4115-7	5SL4115-8	–	5SL4515-7	5SL4515-8	–	5SL4215-7	5SL4215-8
2 A	5SL4102-6	5SL4102-7	5SL4102-8	5SL4502-6	5SL4502-7	5SL4502-8	5SL4202-6	5SL4202-7	5SL4202-8
3 A	5SL4103-6	5SL4103-7	5SL4103-8	5SL4503-6	5SL4503-7	5SL4503-8	5SL4203-6	5SL4203-7	5SL4203-8
4 A	5SL4104-6	5SL4104-7	5SL4104-8	5SL4504-6	5SL4504-7	5SL4504-8	5SL4204-6	5SL4204-7	5SL4204-8
6 A	5SL4106-6	5SL4106-7	5SL4106-8	5SL4506-6	5SL4506-7	5SL4506-8	5SL4206-6	5SL4206-7	5SL4206-8
8 A	5SL4108-6	5SL4108-7	5SL4108-8	5SL4508-6	5SL4508-7	5SL4508-8	5SL4208-6	5SL4208-7	5SL4208-8
10 A	5SL4110-6	5SL4110-7	5SL4110-8	5SL4510-6	5SL4510-7	5SL4510-8	5SL4210-6	5SL4210-7	5SL4210-8
13 A	5SL4113-6	5SL4113-7	5SL4113-8	5SL4513-6	5SL4513-7	5SL4513-8	5SL4213-6	5SL4213-7	5SL4213-8
16 A	5SL4116-6	5SL4116-7	5SL4116-8	5SL4516-6	5SL4516-7	5SL4516-8	5SL4216-6	5SL4216-7	5SL4216-8
20 A	5SL4120-6	5SL4120-7	5SL4120-8	5SL4520-6	5SL4520-7	5SL4520-8	5SL4220-6	5SL4220-7	5SL4220-8
25 A	5SL4125-6	5SL4125-7	5SL4125-8	5SL4525-6	5SL4525-7	5SL4525-8	5SL4225-6	5SL4225-7	5SL4225-8
32 A	5SL4132-6	5SL4132-7	5SL4132-8	5SL4532-6	5SL4532-7	5SL4532-8	5SL4232-6	5SL4232-7	5SL4232-8
40 A	5SL4140-6	5SL4140-7	5SL4140-8	5SL4540-6	5SL4540-7	5SL4540-8	5SL4240-6	5SL4240-7	5SL4240-8
50 A	5SL4150-6	5SL4150-7	5SL4150-8	5SL4550-6	5SL4550-7	5SL4550-8	5SL4250-6	5SL4250-7	5SL4250-8
63 A	5SL4163-6	5SL4163-7	5SL4163-8	5SL4563-6	5SL4563-7	5SL4563-8	5SL4263-6	5SL4263-7	5SL4263-8

Mounting concept



AFDD Arc fault detection devices [See page 3/51](#)
 AS Auxiliary switches [See page 3/44](#)
 FC Fault signal contacts [See page 3/46](#)


AS+FC Auxiliary switches and fault signal contacts [See page 3/47](#)
 ST Shunt trips [See page 3/48](#)

UR Undervoltage releases [See page 3/49](#)
 RC mech. Remote controlled mechanisms [See page 3/50](#)




3P
400 V AC

3 MW




3P+N
400 V AC

4 MW



4P
400 V AC

4 MW



Characteristic

B C D

–	5SL4314-7	5SL4314-8
–	5SL4305-7	5SL4305-8
5SL4301-6	5SL4301-7	5SL4301-8
–	5SL4315-7	5SL4315-8
5SL4302-6	5SL4302-7	5SL4302-8
5SL4303-6	5SL4303-7	5SL4303-8
5SL4304-6	5SL4304-7	5SL4304-8
5SL4306-6	5SL4306-7	5SL4306-8
5SL4308-6	5SL4308-7	5SL4308-8
5SL4310-6	5SL4310-7	5SL4310-8
5SL4313-6	5SL4313-7	5SL4313-8
5SL4316-6	5SL4316-7	5SL4316-8
5SL4320-6	5SL4320-7	5SL4320-8
5SL4325-6	5SL4325-7	5SL4325-8
5SL4332-6	5SL4332-7	5SL4332-8
5SL4340-6	5SL4340-7	5SL4340-8
5SL4350-6	5SL4350-7	5SL4350-8
5SL4363-6	5SL4363-7	5SL4363-8

Characteristic

B C D

–	5SL4614-7	5SL4614-8
–	5SL4605-7	5SL4605-8
5SL4601-6	5SL4601-7	5SL4601-8
–	5SL4615-7	5SL4615-8
5SL4602-6	5SL4602-7	5SL4602-8
5SL4603-6	5SL4603-7	5SL4603-8
5SL4604-6	5SL4604-7	5SL4604-8
5SL4606-6	5SL4606-7	5SL4606-8
5SL4608-6	5SL4608-7	5SL4608-8
5SL4610-6	5SL4610-7	5SL4610-8
5SL4613-6	5SL4613-7	5SL4613-8
5SL4616-6	5SL4616-7	5SL4616-8
5SL4620-6	5SL4620-7	5SL4620-8
5SL4625-6	5SL4625-7	5SL4625-8
5SL4632-6	5SL4632-7	5SL4632-8
5SL4640-6	5SL4640-7	5SL4640-8
5SL4650-6	5SL4650-7	5SL4650-8
5SL4663-6	5SL4663-7	5SL4663-8

Characteristic

B C D

–	5SL4414-7	5SL4414-8
–	5SL4405-7	5SL4405-8
5SL4401-6	5SL4401-7	5SL4401-8
–	5SL4415-7	5SL4415-8
5SL4402-6	5SL4402-7	5SL4402-8
5SL4403-6	5SL4403-7	5SL4403-8
5SL4404-6	5SL4404-7	5SL4404-8
5SL4406-6	5SL4406-7	5SL4406-8
5SL4408-6	5SL4408-7	5SL4408-8
5SL4410-6	5SL4410-7	5SL4410-8
5SL4413-6	5SL4413-7	5SL4413-8
5SL4416-6	5SL4416-7	5SL4416-8
5SL4420-6	5SL4420-7	5SL4420-8
5SL4425-6	5SL4425-7	5SL4425-8
5SL4432-6	5SL4432-7	5SL4432-8
5SL4440-6	5SL4440-7	5SL4440-8
5SL4450-6	5SL4450-7	5SL4450-8
5SL4463-6	5SL4463-7	5SL4463-8

Accessories




Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-6
3–4 MW		5ST3820-7
Arc fault detection devices (AFDD)		Article No.
For basic units 1P+N (2 MW), not in combination with RC mech.	I _n up to 16 A	5SM6021-2
	I _n up to 40 A	5SM6024-2

5SJ6...-KS miniature circuit breaker


6 kA – plug-in terminal on outgoing side



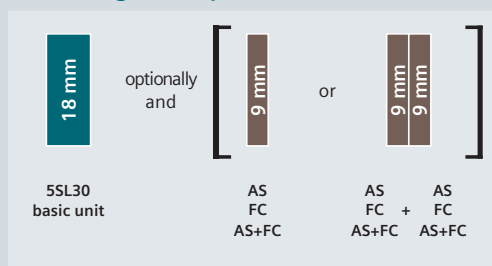
	1P 230/400 V AC	1P+N 230/400 V AC	2P 230/400 V AC	3P 230/400 V AC				
Mounting width	1 MW 	2 MW 	2 MW 	3 MW 				
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
10 A	5SJ6110-6KS	5SJ6110-7KS	5SJ6510-6KS	5SJ6510-7KS	5SJ6210-6KS	5SJ6210-7KS	5SJ6310-6KS	5SJ6310-7KS
13 A	5SJ6113-6KS	5SJ6113-7KS	5SJ6513-6KS	5SJ6513-7KS	5SJ6213-6KS	5SJ6213-7KS	5SJ6313-6KS	5SJ6313-7KS
16 A	5SJ6116-6KS	5SJ6116-7KS	5SJ6516-6KS	5SJ6516-7KS	5SJ6216-6KS	5SJ6216-7KS	5SJ6316-6KS	5SJ6316-7KS
20 A	5SJ6120-6KS	5SJ6120-7KS	5SJ6520-6KS	5SJ6520-7KS	5SJ6220-6KS	5SJ6220-7KS	5SJ6320-6KS	5SJ6320-7KS

5SL30 miniature circuit breakers

1P+N 4.5 kA compact miniature circuit breakers

Mounting width	1P+N (N pole right) 230 V AC	1P+N (N pole left) 230 V AC
	2 MW 	2 MW 
Rated current I_n	Characteristic C	Characteristic C
2 A	5SL3002-7	5SL3002-7KL
4 A	5SL3004-7	5SL3004-7KL
6 A	5SL3006-7	5SL3006-7KL
8 A	5SL3008-7	5SL3008-7KL
10 A	5SL3010-7	5SL3010-7KL
13 A	5SL3013-7	5SL3013-7KL
16 A	5SL3016-7	5SL3016-7KL
20 A	5SL3020-7	5SL3020-7KL
25 A	5SL3025-7	5SL3025-7KL
32 A	5SL3032-7	5SL3032-7KL
40 A	5SL3040-7	5SL3040-7KL

Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts

[See page 3/44](#)

[See page 3/46](#)

[See page 3/47](#)





Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

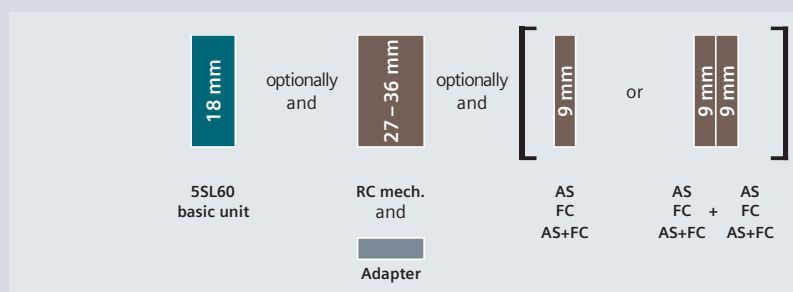
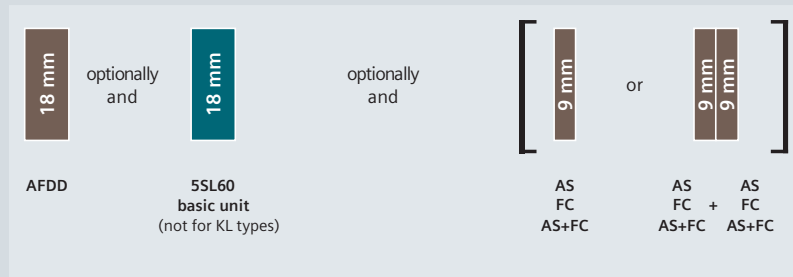
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062

5SL60 miniature circuit breakers

1P+N 6 kA compact miniature circuit breakers

	1P+N (N pole right) 230 V AC	1P+N (N pole left) 230 V AC
Mounting width	1 MW 	1 MW 
Rated current I _n	Characteristic	Characteristic
	B	C
2 A	–	5SL6002-7
4 A	–	5SL6004-7
6 A	5SL6006-6	5SL6006-7
8 A	–	5SL6008-7
10 A	5SL6010-6	5SL6010-7
13 A	5SL6013-6	5SL6013-7
16 A	5SL6016-6	5SL6016-7
20 A	5SL6020-6	5SL6020-7
25 A	5SL6025-6	5SL6025-7
32 A	5SL6032-6	5SL6032-7
40 A	5SL6040-6	5SL6040-7

Mounting concept



AFDD Arc fault detection devices
 AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 RC mech. Remote controlled mechanisms

See page 3/51
 See page 3/44
 See page 3/46
 See page 3/47
 See page 3/50





Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062

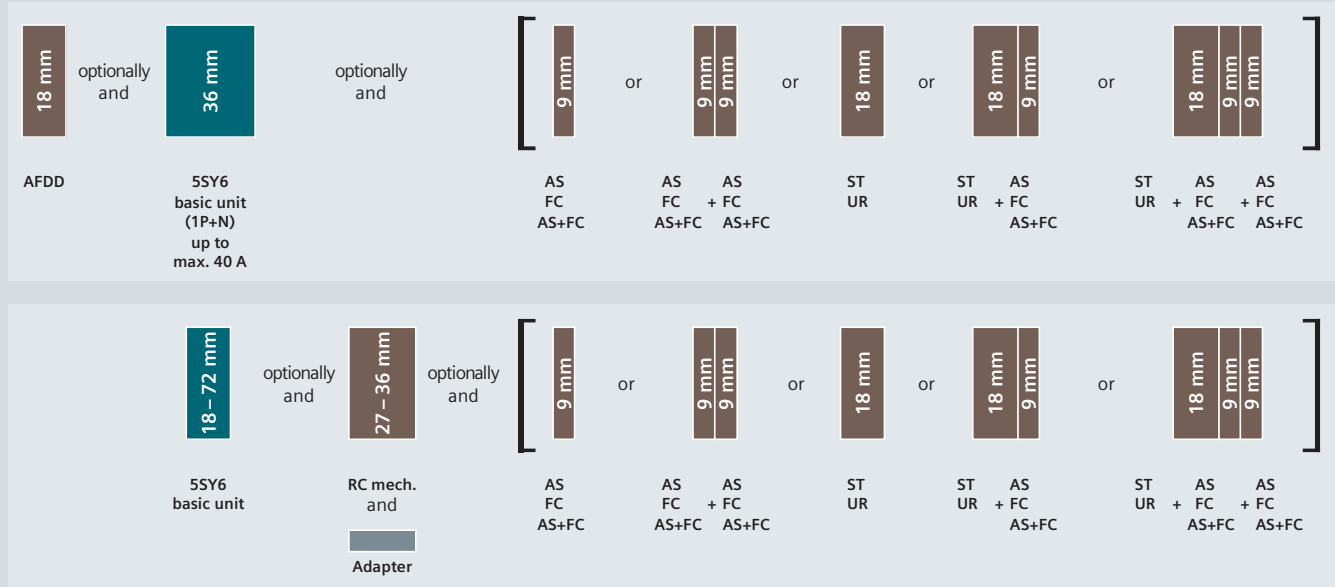
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1 MW		5ST3820-6
Arc fault detection devices (AFDD)		Article No.
For basic units 1P + N (1 MW), not for KL types	I _n up to 16 A	5SM6011-2
	I _n up to 40 A	5SM6014-2

5SY6 miniature circuit breakers

6 kA

	1P 230/400 V AC	1P+N 230 V AC	2P 400 V AC	3P 400 V AC				
Mounting width	1 MW 	2 MW 	2 MW 	3 MW 				
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SY6114-7	–	5SY6514-7	–	5SY6214-7	–	5SY6314-7
0.5 A	–	5SY6105-7	–	5SY6505-7	–	5SY6205-7	–	5SY6305-7
1 A	–	5SY6101-7	–	5SY6501-7	–	5SY6201-7	–	5SY6301-7
1.6 A	–	5SY6115-7	–	5SY6515-7	–	5SY6215-7	–	5SY6315-7
2 A	5SY6102-6	5SY6102-7	–	5SY6502-7	–	5SY6202-7	–	5SY6302-7
3 A	–	5SY6103-7	–	5SY6503-7	–	5SY6203-7	–	5SY6303-7
4 A	5SY6104-6	5SY6104-7	–	5SY6504-7	–	5SY6204-7	–	5SY6304-7
5 A	–	5SY6111-7	–	–	–	5SY6211-7	–	5SY6311-7
6 A	5SY6106-6	5SY6106-7	5SY6506-6	5SY6506-7	5SY6206-6	5SY6206-7	5SY6306-6	5SY6306-7
8 A	–	5SY6108-7	–	5SY6508-7	–	5SY6208-7	–	5SY6308-7
10 A	5SY6110-6	5SY6110-7	5SY6510-6	5SY6510-7	5SY6210-6	5SY6210-7	5SY6310-6	5SY6310-7
13 A	5SY6113-6	5SY6113-7	5SY6513-6	5SY6513-7	5SY6213-6	5SY6213-7	5SY6313-6	5SY6313-7
15 A	–	5SY6118-7	–	–	–	5SY6218-7	–	5SY6318-7
16 A	5SY6116-6	5SY6116-7	5SY6516-6	5SY6516-7	5SY6216-6	5SY6216-7	5SY6316-6	5SY6316-7
20 A	5SY6120-6	5SY6120-7	5SY6520-6	5SY6520-7	5SY6220-6	5SY6220-7	5SY6320-6	5SY6320-7
25 A	5SY6125-6	5SY6125-7	5SY6525-6	5SY6525-7	5SY6225-6	5SY6225-7	5SY6325-6	5SY6325-7
30 A	–	5SY6130-7	–	–	–	5SY6230-7	–	5SY6330-7
32 A	5SY6132-6	5SY6132-7	5SY6532-6	5SY6532-7	5SY6232-6	5SY6232-7	5SY6332-6	5SY6332-7
40 A	5SY6140-6	5SY6140-7	5SY6540-6	5SY6540-7	5SY6240-6	5SY6240-7	5SY6340-6	5SY6340-7
50 A	5SY6150-6	5SY6150-7	5SY6550-6	5SY6550-7	5SY6250-6	5SY6250-7	5SY6350-6	5SY6350-7
63 A	5SY6163-6	5SY6163-7	5SY6563-6	5SY6563-7	5SY6263-6	5SY6263-7	5SY6363-6	5SY6363-7

Mounting concept



AFDD Arc fault detection devices [See page 3/51](#)
 AS Auxiliary switches [See page 3/44](#)
 FC Fault signal contacts [See page 3/46](#)

AS+FC Auxiliary switches and fault signal contacts [See page 3/47](#)
 ST Shunt trips [See page 3/48](#)

UR Undervoltage releases [See page 3/49](#)
 RC mech. Remote controlled mechanisms [See page 3/50](#)



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
B	C	B	C
–	5SY6614-7	–	5SY6414-7
–	5SY6605-7	–	5SY6405-7
–	5SY6601-7	–	5SY6401-7
–	5SY6615-7	–	5SY6415-7
–	5SY6602-7	–	5SY6402-7
–	5SY6603-7	–	5SY6403-7
–	5SY6604-7	–	5SY6404-7
–	–	–	–
5SY6606-6	5SY6606-7	5SY6406-6	5SY6406-7
–	5SY6608-7	–	5SY6408-7
5SY6610-6	5SY6610-7	5SY6410-6	5SY6410-7
5SY6613-6	5SY6613-7	5SY6413-6	5SY6413-7
–	–	–	–
5SY6616-6	5SY6616-7	5SY6416-6	5SY6416-7
5SY6620-6	5SY6620-7	5SY6420-6	5SY6420-7
5SY6625-6	5SY6625-7	5SY6425-6	5SY6425-7
–	–	–	–
5SY6632-6	5SY6632-7	5SY6432-6	5SY6432-7
5SY6640-6	5SY6640-7	5SY6440-6	5SY6440-7
5SY6650-6	5SY6650-7	5SY6450-6	5SY6450-7
5SY6663-6	5SY6663-7	5SY6463-6	5SY6463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

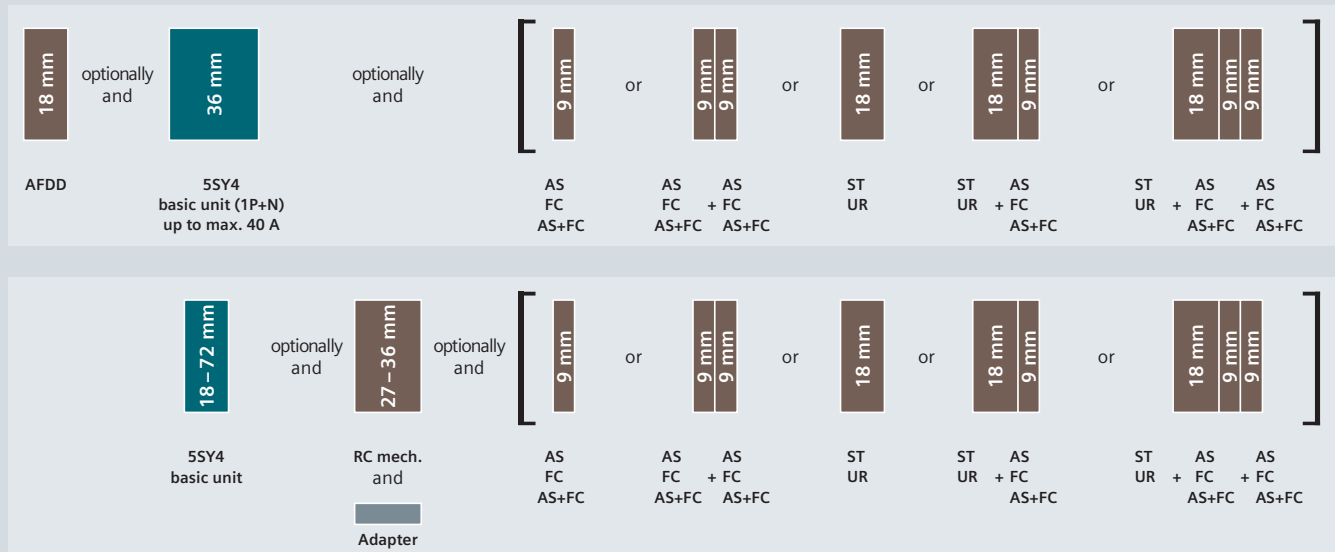
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2
Arc fault detection devices (AFDD)		Article No.
For basic units 1P+N (2 MW), not in combination with RC mech.	I _n up to 16 A	5SM6021-2
	I _n up to 40 A	5SM6024-2

5SY4 miniature circuit breakers

10 kA

Mounting width	1P 230/400 V AC 1 MW				1P+N 230 V AC 2 MW				2P 400 V AC 2 MW			
Rated current I_n	Characteristic				Characteristic				Characteristic			
	A	B	C	D	A	B	C	D	A	B	C	D
0.3 A	–	–	5SY4114-7	5SY4114-8	–	–	5SY4514-7	5SY4514-8	–	–	5SY4214-7	5SY4214-8
0.5 A	5SY4105-5	–	5SY4105-7	5SY4105-8	–	–	5SY4505-7	5SY4505-8	5SY4205-5	–	5SY4205-7	5SY4205-8
1 A	5SY4101-5	5SY4101-6 new	5SY4101-7	5SY4101-8	5SY4501-5	–	5SY4501-7	5SY4501-8	5SY4201-5	5SY4201-6 new	5SY4201-7	5SY4201-8
1.6 A	5SY4115-5	5SY4115-6 new	5SY4115-7	5SY4115-8	5SY4515-5	5SY4515-6 new	5SY4515-7	5SY4515-8	5SY4215-5	5SY4215-6 new	5SY4215-7	5SY4215-8
2 A	5SY4102-5	5SY4102-6	5SY4102-7	5SY4102-8	5SY4502-5	–	5SY4502-7	5SY4502-8	5SY4202-5	5SY4202-6 new	5SY4202-7	5SY4202-8
3 A	5SY4103-5	5SY4103-6 new	5SY4103-7	5SY4103-8	5SY4503-5	–	5SY4503-7	5SY4503-8	5SY4203-5	5SY4203-6 new	5SY4203-7	5SY4203-8
4 A	5SY4104-5	5SY4104-6	5SY4104-7	5SY4104-8	5SY4504-5	5SY4504-6 new	5SY4504-7	5SY4504-8	5SY4204-5	5SY4204-6 new	5SY4204-7	5SY4204-8
5 A	–	–	5SY4111-7	–	–	–	–	–	–	–	5SY4211-7	–
6 A	5SY4106-5	5SY4106-6	5SY4106-7	5SY4106-8	5SY4506-5	5SY4506-6	5SY4506-7	5SY4506-8	5SY4206-5	5SY4206-6	5SY4206-7	5SY4206-8
8 A	5SY4108-5	5SY4108-6 new	5SY4108-7	5SY4108-8	5SY4508-5	–	5SY4508-7	5SY4508-8	5SY4208-5	5SY4208-6 new	5SY4208-7	5SY4208-8
10 A	5SY4110-5	5SY4110-6	5SY4110-7	5SY4110-8	5SY4510-5	5SY4510-6	5SY4510-7	5SY4510-8	5SY4210-5	5SY4210-6	5SY4210-7	5SY4210-8
13 A	5SY4113-5	5SY4113-6	5SY4113-7	5SY4113-8	5SY4513-5	5SY4513-6	5SY4513-7	5SY4513-8	5SY4213-5	5SY4213-6	5SY4213-7	5SY4213-8
15 A	–	–	5SY4118-7	–	–	–	–	–	–	–	5SY4218-7	–
16 A	5SY4116-5	5SY4116-6	5SY4116-7	5SY4116-8	5SY4516-5	5SY4516-6	5SY4516-7	5SY4516-8	5SY4216-5	5SY4216-6	5SY4216-7	5SY4216-8
20 A	5SY4120-5	5SY4120-6	5SY4120-7	5SY4120-8	5SY4520-5	5SY4520-6	5SY4520-7	5SY4520-8	5SY4220-5	5SY4220-6	5SY4220-7	5SY4220-8
25 A	5SY4125-5	5SY4125-6	5SY4125-7	5SY4125-8	5SY4525-5	5SY4525-6	5SY4525-7	5SY4525-8	5SY4225-5	5SY4225-6	5SY4225-7	5SY4225-8
30 A	–	–	5SY4130-7	–	–	–	–	–	–	–	5SY4230-7	–
32 A	5SY4132-5	5SY4132-6	5SY4132-7	5SY4132-8	5SY4532-5	5SY4532-6	5SY4532-7	5SY4532-8	5SY4232-5	5SY4232-6	5SY4232-7	5SY4232-8
35 A	–	–	5SY4135-7	–	–	–	–	–	–	–	5SY4235-7	–
40 A	5SY4140-5	5SY4140-6	5SY4140-7	5SY4140-8	5SY4540-5	5SY4540-6	5SY4540-7	5SY4540-8	5SY4240-5	5SY4240-6	5SY4240-7	5SY4240-8
45 A	–	–	5SY4145-7	–	–	–	–	–	–	–	5SY4245-7	–
50 A	5SY4150-5	5SY4150-6	5SY4150-7	5SY4150-8	5SY4550-5	5SY4550-6	5SY4550-7	5SY4550-8	5SY4250-5	5SY4250-6	5SY4250-7	5SY4250-8
60 A	–	–	5SY4160-7	–	–	–	–	–	–	–	5SY4260-7	–
63 A	5SY4163-5	5SY4163-6	5SY4163-7	5SY4163-8	5SY4563-5	5SY4563-6	5SY4563-7	5SY4563-8	5SY4263-5	5SY4263-6	5SY4263-7	5SY4263-8
80 A	–	5SY4180-6	5SY4180-7	–	–	–	5SY4580-7	–	–	5SY4280-6	5SY4280-7	–

Mounting concept





3

3P 400 V AC 3 MW				3P+N 400 V AC 4 MW				4P 400 V AC 4 MW			
Characteristic				Characteristic				Characteristic			
A	B	C	D	A	B	C	D	A	B	C	D
–	–	5SY4314-7	5SY4314-8	–	–	5SY4614-7	5SY4614-8	–	–	5SY4414-7	5SY4414-8
5SY4305-5	–	5SY4305-7	5SY4305-8	–	–	5SY4605-7	5SY4605-8	–	–	5SY4405-7	5SY4405-8
5SY4301-5	5SY4301-6 new	5SY4301-7	5SY4301-8	5SY4601-5	–	5SY4601-7	5SY4601-8	5SY4401-5	–	5SY4401-7	5SY4401-8
5SY4315-5	5SY4315-6 new	5SY4315-7	5SY4315-8	5SY4615-5	–	5SY4615-7	5SY4615-8	5SY4415-5	–	5SY4415-7	5SY4415-8
5SY4302-5	5SY4302-6 new	5SY4302-7	5SY4302-8	5SY4602-5	–	5SY4602-7	5SY4602-8	5SY4402-5	–	5SY4402-7	5SY4402-8
5SY4303-5	5SY4303-6 new	5SY4303-7	5SY4303-8	5SY4603-5	–	5SY4603-7	5SY4603-8	5SY4403-5	–	5SY4403-7	5SY4403-8
5SY4304-5	5SY4304-6 new	5SY4304-7	5SY4304-8	5SY4604-5	–	5SY4604-7	5SY4604-8	5SY4404-5	–	5SY4404-7	5SY4404-8
–	–	5SY4311-7	–	–	–	–	–	–	–	–	–
5SY4306-5	5SY4306-6	5SY4306-7	5SY4306-8	5SY4606-5	5SY4606-6	5SY4606-7	5SY4606-8	5SY4406-5	5SY4406-6	5SY4406-7	5SY4406-8
5SY4308-5	5SY4308-6 new	5SY4308-7	5SY4308-8	5SY4608-5	–	5SY4608-7	5SY4608-8	5SY4408-5	–	5SY4408-7	5SY4408-8
5SY4310-5	5SY4310-6	5SY4310-7	5SY4310-8	5SY4610-5	5SY4610-6	5SY4610-7	5SY4610-8	5SY4410-5	5SY4410-6	5SY4410-7	5SY4410-8
5SY4313-5	5SY4313-6	5SY4313-7	5SY4313-8	5SY4613-5	5SY4613-6	5SY4613-7	5SY4613-8	5SY4413-5	5SY4413-6	5SY4413-7	5SY4413-8
–	–	5SY4318-7	–	–	–	–	–	–	–	–	–
5SY4316-5	5SY4316-6	5SY4316-7	5SY4316-8	5SY4616-5	5SY4616-6	5SY4616-7	5SY4616-8	5SY4416-5	5SY4416-6	5SY4416-7	5SY4416-8
5SY4320-5	5SY4320-6	5SY4320-7	5SY4320-8	5SY4620-5	5SY4620-6	5SY4620-7	5SY4620-8	5SY4420-5	5SY4420-6	5SY4420-7	5SY4420-8
5SY4325-5	5SY4325-6	5SY4325-7	5SY4325-8	5SY4625-5	5SY4625-6	5SY4625-7	5SY4625-8	5SY4425-5	5SY4425-6	5SY4425-7	5SY4425-8
–	–	5SY4330-7	–	–	–	–	–	–	–	–	–
5SY4332-5	5SY4332-6	5SY4332-7	5SY4332-8	5SY4632-5	5SY4632-6	5SY4632-7	5SY4632-8	5SY4432-5	5SY4432-6	5SY4432-7	5SY4432-8
–	–	5SY4335-7	–	–	–	–	–	–	–	–	–
5SY4340-5	5SY4340-6	5SY4340-7	5SY4340-8	5SY4640-5	5SY4640-6	5SY4640-7	5SY4640-8	5SY4440-5	5SY4440-6	5SY4440-7	5SY4440-8
–	–	5SY4345-7	–	–	–	–	–	–	–	–	–
5SY4350-5	5SY4350-6	5SY4350-7	5SY4350-8	5SY4650-5	5SY4650-6	5SY4650-7	5SY4650-8	5SY4450-5	5SY4450-6	5SY4450-7	5SY4450-8
–	–	5SY4360-7	–	–	–	–	–	–	–	–	–
5SY4363-5	5SY4363-6	5SY4363-7	5SY4363-8	5SY4663-5	5SY4663-6	5SY4663-7	5SY4663-8	5SY4463-5	5SY4463-6	5SY4463-7	5SY4463-8
–	5SY4380-6	5SY4380-7	–	–	–	5SY4680-7	–	–	5SY4480-6	5SY4480-7	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

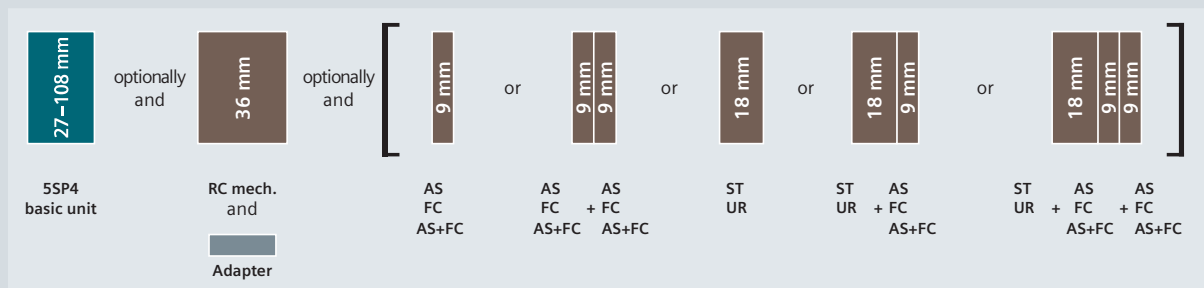
Arc fault detection devices (AFDD)		Article No.
For basic units 1P+N (2 MW)	I _n up to 16 A	5SM6021-2
	I _n up to 40 A	5SM6024-2
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	177 ... 270 V AC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2

5SP4 miniature circuit breakers

10 kA

Mounting width	1P 230/400 V AC			2P 400 V AC		
	1.5 MW 			3 MW 		
Rated current I _n	Characteristic			Characteristic		
	B	C	D	B	C	D
80 A	5SP4180-6	5SP4180-7	5SP4180-8	5SP4280-6	5SP4280-7	5SP4280-8
100 A	5SP4191-6	5SP4191-7	5SP4191-8	5SP4291-6	5SP4291-7	5SP4291-8
125 A	5SP4192-6	5SP4192-7	–	5SP4292-6	5SP4292-7	–

Mounting concept




AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 ST Shunt trips
 UR Undervoltage releases
 RC mech. Remote controlled mechanisms

[See page 3/44](#)
[See page 3/46](#)
[See page 3/47](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/50](#)



3P
400 V AC


4.5 MW



4P

400 V AC

6 MW



Characteristic

B	C	D
5SP4380-6	5SP4380-7	5SP4380-8
5SP4391-6	5SP4391-7	5SP4391-8
5SP4392-6	5SP4392-7	–

Characteristic

B	C	D
5SP4480-6	5SP4480-7	5SP4480-8
5SP4491-6	5SP4491-7	5SP4491-8
5SP4492-6	5SP4492-7	–

3

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
Power with ARD	177 ... 270 V AC	5ST3058
	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Power with extended function		
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1.5 MW		5ST3820-1
3–6 MW		5ST3820-2

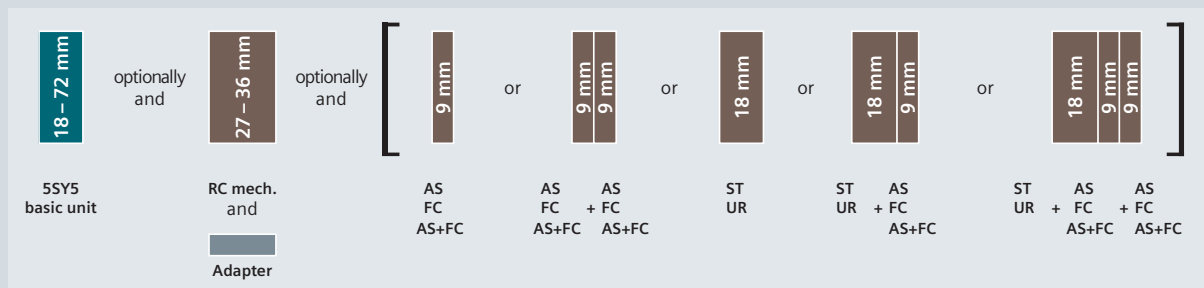
5SY5 miniature circuit breakers

10 kA

3

	1P 230/400 V AC, 220 V DC	2P 400 V AC, 440 V DC	4P 400 V AC, 880 V DC			
Mounting width	1 MW 	2 MW 	4 MW 			
Rated current I _n	Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C
0.3 A	–	5SY5114-7	–	5SY5214-7	–	5SY5414-7
0.5 A	–	5SY5105-7	–	5SY5205-7	–	5SY5405-7
1 A	–	5SY5101-7	–	5SY5201-7	–	5SY5401-7
1.6 A	–	5SY5115-7	–	5SY5215-7	–	5SY5415-7
2 A	5SY5102-6	5SY5102-7	5SY5202-6 new	5SY5202-7	–	5SY5402-7
3 A	–	5SY5103-7	–	5SY5203-7	–	5SY5403-7
4 A	5SY5104-6	5SY5104-7	5SY5204-6 new	5SY5204-7	–	5SY5404-7
6 A	5SY5106-6	5SY5106-7	5SY5206-6	5SY5206-7	5SY5406-6	5SY5406-7
8 A	5SY5108-6 new	5SY5108-7	5SY5208-6 new	5SY5208-7	–	5SY5408-7
10 A	5SY5110-6	5SY5110-7	5SY5210-6	5SY5210-7	5SY5410-6	5SY5410-7
13 A	5SY5113-6	5SY5113-7	5SY5213-6	5SY5213-7	5SY5413-6	5SY5413-7
16 A	5SY5116-6	5SY5116-7	5SY5216-6	5SY5216-7	5SY5416-6	5SY5416-7
20 A	5SY5120-6	5SY5120-7	5SY5220-6	5SY5220-7	5SY5420-6	5SY5420-7
25 A	5SY5125-6	5SY5125-7	5SY5225-6	5SY5225-7	5SY5425-6	5SY5425-7
32 A	5SY5132-6	5SY5132-7	5SY5232-6	5SY5232-7	5SY5432-6	5SY5432-7
40 A	5SY5140-6	5SY5140-7	5SY5240-6	5SY5240-7	5SY5440-6	5SY5440-7
50 A	5SY5150-6	5SY5150-7	5SY5250-6	5SY5250-7	5SY5450-6	5SY5450-7
63 A	5SY5163-6	5SY5163-7	5SY5263-6	5SY5263-7	5SY5463-6	5SY5463-7

Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 ST Shunt trips
 UR Undervoltage releases
 RC mech. Remote controlled mechanisms

[See page 3/44](#)
[See page 3/46](#)
[See page 3/47](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/50](#)



Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01


Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
4 MW		5ST3820-2

5SY7 miniature circuit breakers

15 kA

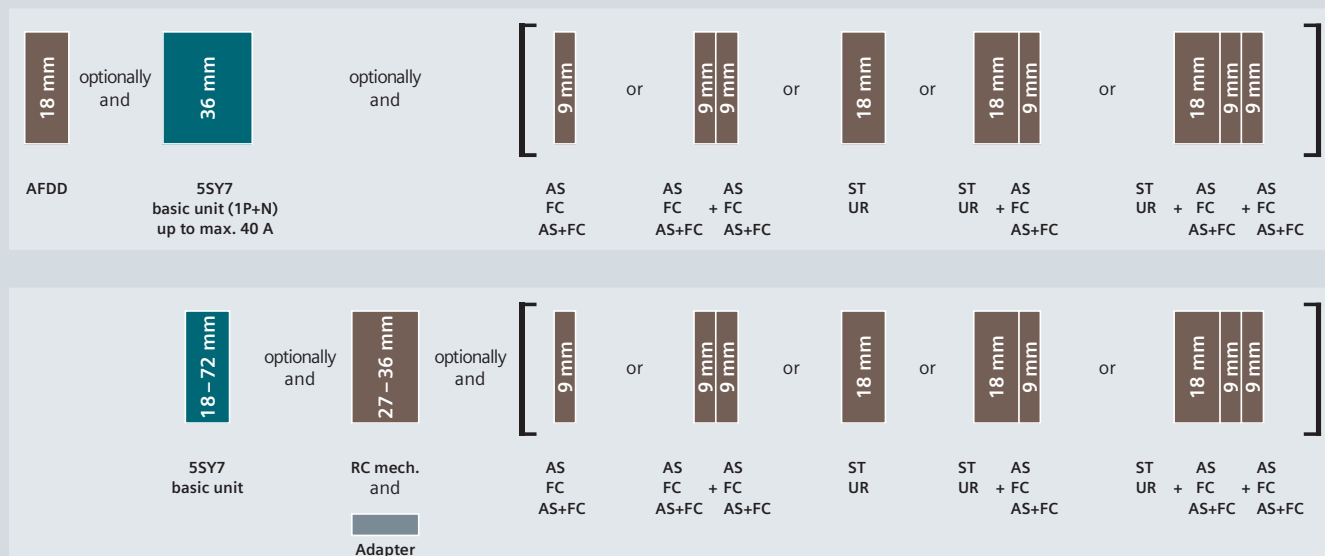
Mounting width

 1P
 230/400 V AC

 1P+N
 230 V AC

 2P
 400 V AC


Rated current I_n	Main MCB, line side of meter	Characteristic			Characteristic			Characteristic		
		B	C	D	B	C	D	B	C	D
0.3 A	–	–	5SY7114-7	5SY7114-8	–	5SY7514-7	5SY7514-8	–	5SY7214-7	5SY7214-8
0.5 A	–	–	5SY7105-7	5SY7105-8	–	5SY7505-7	5SY7505-8	–	5SY7205-7	5SY7205-8
1 A	–	–	5SY7101-7	5SY7101-8	–	5SY7501-7	5SY7501-8	–	5SY7201-7	5SY7201-8
1.6 A	–	–	5SY7115-7	5SY7115-8	–	5SY7515-7	5SY7515-8	–	5SY7215-7	5SY7215-8
2 A	–	–	5SY7102-7	5SY7102-8	–	5SY7502-7	5SY7502-8	–	5SY7202-7	5SY7202-8
3 A	–	–	5SY7103-7	5SY7103-8	–	5SY7503-7	5SY7503-8	–	5SY7203-7	5SY7203-8
4 A	–	–	5SY7104-7	5SY7104-8	–	5SY7504-7	5SY7504-8	–	5SY7204-7	5SY7204-8
6 A	–	5SY7106-6	5SY7106-7	5SY7106-8	5SY7506-6	5SY7506-7	5SY7506-8	5SY7206-6	5SY7206-7	5SY7206-8
	■	5SY7106-6KK13	–	–	–	–	–	–	–	–
8 A	–	–	5SY7108-7	5SY7108-8	–	5SY7508-7	5SY7508-8	–	5SY7208-7	5SY7208-8
10 A	–	5SY7110-6	5SY7110-7	5SY7110-8	5SY7510-6	5SY7510-7	5SY7510-8	5SY7210-6	5SY7210-7	5SY7210-8
	■	5SY7110-6KK13	–	–	–	–	–	–	–	–
13 A	–	5SY7113-6	5SY7113-7	5SY7113-8	5SY7513-6	5SY7513-7	5SY7513-8	5SY7213-6	5SY7213-7	5SY7213-8
16 A	–	5SY7116-6	5SY7116-7	5SY7116-8	5SY7516-6	5SY7516-7	5SY7516-8	5SY7216-6	5SY7216-7	5SY7216-8
20 A	–	5SY7120-6	5SY7120-7	5SY7120-8	5SY7520-6	5SY7520-7	5SY7520-8	5SY7220-6	5SY7220-7	5SY7220-8
25 A	–	5SY7125-6	5SY7125-7	5SY7125-8	5SY7525-6	5SY7525-7	5SY7525-8	5SY7225-6	5SY7225-7	5SY7225-8
32 A	–	5SY7132-6	5SY7132-7	5SY7132-8	5SY7532-6	5SY7532-7	5SY7532-8	5SY7232-6	5SY7232-7	5SY7232-8
40 A	–	5SY7140-6	5SY7140-7	5SY7140-8	5SY7540-6	5SY7540-7	5SY7540-8	5SY7240-6	5SY7240-7	5SY7240-8
50 A	–	5SY7150-6	5SY7150-7	5SY7150-8	5SY7550-6	5SY7550-7	5SY7550-8	5SY7250-6	5SY7250-7	5SY7250-8
63 A	–	5SY7163-6	5SY7163-7	5SY7163-8	5SY7563-6	5SY7563-7	5SY7563-8	5SY7263-6	5SY7263-7	5SY7263-8

Mounting concept



AFDD Arc fault detection devices [See page 3/51](#)
 AS Auxiliary switches [See page 3/44](#)
 FC Fault signal contacts [See page 3/46](#)

AS+FC Auxiliary switches and fault signal contacts [See page 3/47](#)
 ST Shunt trips [See page 3/48](#)

UR Undervoltage releases [See page 3/49](#)
 RC mech. Remote controlled mechanisms [See page 3/50](#)



3P 400 V AC 3 MW			3P+N 400 V AC 4 MW			4P 400 V AC 4 MW		
Characteristic			Characteristic			Characteristic		
B	C	D	B	C	D	B	C	D
–	5SY7314-7	5SY7314-8	–	5SY7614-7	5SY7614-8	–	5SY7414-7	5SY7414-8
–	5SY7305-7	5SY7305-8	–	5SY7605-7	5SY7605-8	–	5SY7405-7	5SY7405-8
–	5SY7301-7	5SY7301-8	–	5SY7601-7	5SY7601-8	–	5SY7401-7	5SY7401-8
–	5SY7315-7	5SY7315-8	–	5SY7615-7	5SY7615-8	–	5SY7415-7	5SY7415-8
–	5SY7302-7	5SY7302-8	–	5SY7602-7	5SY7602-8	–	5SY7402-7	5SY7402-8
–	5SY7303-7	5SY7303-8	–	5SY7603-7	5SY7603-8	–	5SY7403-7	5SY7403-8
–	5SY7304-7	5SY7304-8	–	5SY7604-7	5SY7604-8	–	5SY7404-7	5SY7404-8
5SY7306-6	5SY7306-7	5SY7306-8	5SY7606-6	5SY7606-7	5SY7606-8	5SY7406-6	5SY7406-7	5SY7406-8
–	–	–	–	–	–	–	–	–
–	5SY7308-7	5SY7308-8	–	5SY7608-7	5SY7608-8	–	5SY7408-7	5SY7408-8
5SY7310-6	5SY7310-7	5SY7310-8	5SY7610-6	5SY7610-7	5SY7610-8	5SY7410-6	5SY7410-7	5SY7410-8
–	–	–	–	–	–	–	–	–
5SY7313-6	5SY7313-7	5SY7313-8	5SY7613-6	5SY7613-7	5SY7613-8	5SY7413-6	5SY7413-7	5SY7413-8
5SY7316-6	5SY7316-7	5SY7316-8	5SY7616-6	5SY7616-7	5SY7616-8	5SY7416-6	5SY7416-7	5SY7416-8
5SY7320-6	5SY7320-7	5SY7320-8	5SY7620-6	5SY7620-7	5SY7620-8	5SY7420-6	5SY7420-7	5SY7420-8
5SY7325-6	5SY7325-7	5SY7325-8	5SY7625-6	5SY7625-7	5SY7625-8	5SY7425-6	5SY7425-7	5SY7425-8
5SY7332-6	5SY7332-7	5SY7332-8	5SY7632-6	5SY7632-7	5SY7632-8	5SY7432-6	5SY7432-7	5SY7432-8
5SY7340-6	5SY7340-7	5SY7340-8	5SY7640-6	5SY7640-7	5SY7640-8	5SY7440-6	5SY7440-7	5SY7440-8
5SY7350-6	5SY7350-7	5SY7350-8	5SY7650-6	5SY7650-7	5SY7650-8	5SY7450-6	5SY7450-7	5SY7450-8
5SY7363-6	5SY7363-7	5SY7363-8	5SY7663-6	5SY7663-7	5SY7663-8	5SY7463-6	5SY7463-7	5SY7463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	177 ... 270 V AC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2
Arc fault detection devices (AFDD)		Article No.
For basic units 1P+N (2 MW)	I _n up to 16 A	5SM6021-2
	I _n up to 40 A	5SM6024-2

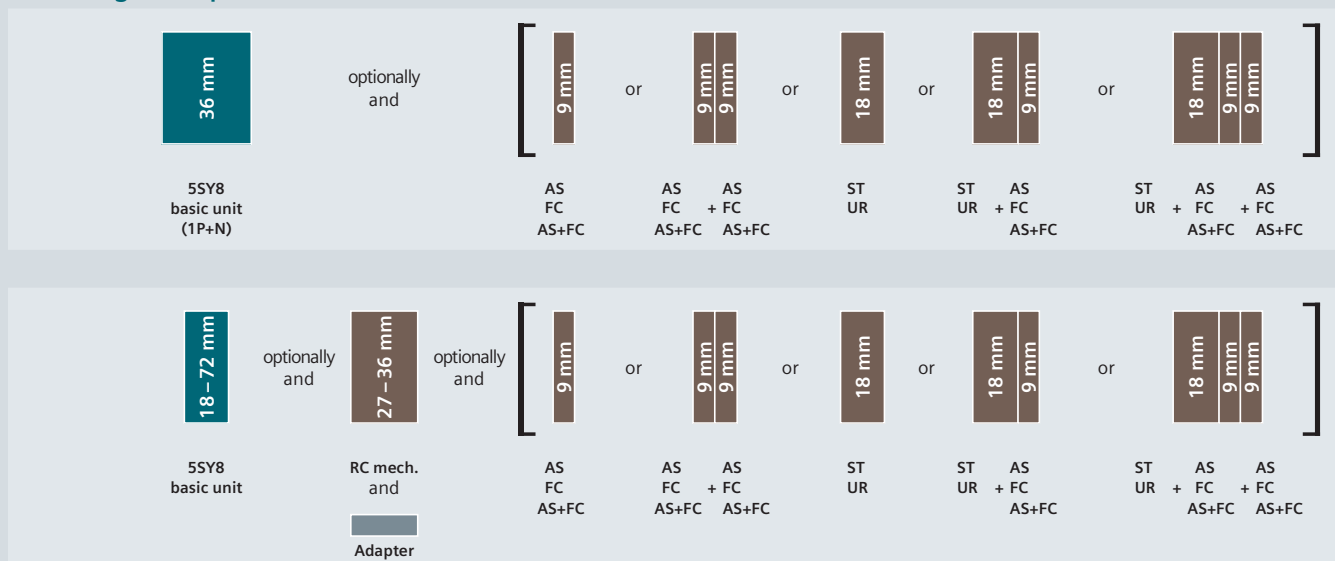
5SY8 miniature circuit breakers

25 kA

3

	1P 230/400 V AC		1P+N 230 V AC		2P 400 V AC		3P 400 V AC	
Mounting width	1 MW		2 MW		2 MW		3 MW	
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	C	D	C	D	C	D	C	D
0.3 A	5SY8114-7	5SY8114-8	5SY8514-7	5SY8514-8	5SY8214-7	5SY8214-8	5SY8314-7	5SY8314-8
0.5 A	5SY8105-7	5SY8105-8	5SY8505-7	5SY8505-8	5SY8205-7	5SY8205-8	5SY8305-7	5SY8305-8
1 A	5SY8101-7	5SY8101-8	5SY8501-7	5SY8501-8	5SY8201-7	5SY8201-8	5SY8301-7	5SY8301-8
1.6 A	5SY8115-7	5SY8115-8	5SY8515-7	5SY8515-8	5SY8215-7	5SY8215-8	5SY8315-7	5SY8315-8
2 A	5SY8102-7	5SY8102-8	5SY8502-7	5SY8502-8	5SY8202-7	5SY8202-8	5SY8302-7	5SY8302-8
3 A	5SY8103-7	5SY8103-8	5SY8503-7	5SY8503-8	5SY8203-7	5SY8203-8	5SY8303-7	5SY8303-8
4 A	5SY8104-7	5SY8104-8	5SY8504-7	5SY8504-8	5SY8204-7	5SY8204-8	5SY8304-7	5SY8304-8
6 A	5SY8106-7	5SY8106-8	5SY8506-7	5SY8506-8	5SY8206-7	5SY8206-8	5SY8306-7	5SY8306-8
8 A	5SY8108-7	5SY8108-8	5SY8508-7	5SY8508-8	5SY8208-7	5SY8208-8	5SY8308-7	5SY8308-8
10 A	5SY8110-7	5SY8110-8	5SY8510-7	5SY8510-8	5SY8210-7	5SY8210-8	5SY8310-7	5SY8310-8
12.5 A	–	–	–	–	–	–	–	–
13 A	5SY8113-7	5SY8113-8	5SY8513-7	5SY8513-8	5SY8213-7	5SY8213-8	5SY8313-7	5SY8313-8
16 A	5SY8116-7	5SY8116-8	5SY8516-7	5SY8516-8	5SY8216-7	5SY8216-8	5SY8316-7	5SY8316-8
20 A	5SY8120-7	5SY8120-8	5SY8520-7	5SY8520-8	5SY8220-7	5SY8220-8	5SY8320-7	5SY8320-8
25 A	5SY8125-7	5SY8125-8	5SY8525-7	5SY8525-8	5SY8225-7	5SY8225-8	5SY8325-7	5SY8325-8
32 A	5SY8132-7	5SY8132-8	5SY8532-7	5SY8532-8	5SY8232-7	5SY8232-8	5SY8332-7	5SY8332-8
40 A	5SY8140-7	5SY8140-8	5SY8540-7	5SY8540-8	5SY8240-7	5SY8240-8	5SY8340-7	5SY8340-8
50 A	5SY8150-7	5SY8150-8	5SY8550-7	5SY8550-8	5SY8250-7	5SY8250-8	5SY8350-7	5SY8350-8
63 A	5SY8163-7	5SY8163-8	5SY8563-7	5SY8563-8	5SY8263-7	5SY8263-8	5SY8363-7	5SY8363-8

Mounting concept




AFDD Arc fault detection devices [See page 3/51](#)
 AS Auxiliary switches [See page 3/44](#)
 FC Fault signal contacts [See page 3/46](#)

AS+FC Auxiliary switches and fault signal contacts [See page 3/47](#)
 ST Shunt trips [See page 3/48](#)


UR Undervoltage releases [See page 3/49](#)
 RC mech. Remote controlled mechanisms [See page 3/50](#)



3P+N
400 V AC
4 MW



4P
400 V AC
4 MW



Characteristic

C D

5SY8614-7	5SY8614-8
5SY8605-7	5SY8605-8
5SY8601-7	5SY8601-8
5SY8615-7	5SY8615-8
5SY8602-7	5SY8602-8
5SY8603-7	5SY8603-8
5SY8604-7	5SY8604-8
5SY8606-7	5SY8606-8
5SY8608-7	5SY8608-8
5SY8610-7	5SY8610-8
–	–
5SY8613-7	5SY8613-8
5SY8616-7	5SY8616-8
5SY8620-7	5SY8620-8
5SY8625-7	5SY8625-8
5SY8632-7	5SY8632-8
5SY8640-7	5SY8640-8
5SY8650-7	5SY8650-8
5SY8663-7	5SY8663-8

Characteristic

C D

5SY8414-7	5SY8414-8
5SY8405-7	5SY8405-8
5SY8401-7	5SY8401-8
5SY8415-7	5SY8415-8
5SY8402-7	5SY8402-8
5SY8403-7	5SY8403-8
5SY8404-7	5SY8404-8
5SY8406-7	5SY8406-8
5SY8408-7	5SY8408-8
5SY8410-7	5SY8410-8
–	–
5SY8413-7	5SY8413-8
5SY8416-7	5SY8416-8
5SY8420-7	5SY8420-8
5SY8425-7	5SY8425-8
5SY8432-7	5SY8432-8
5SY8440-7	5SY8440-8
5SY8450-7	5SY8450-8
5SY8463-7	5SY8463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

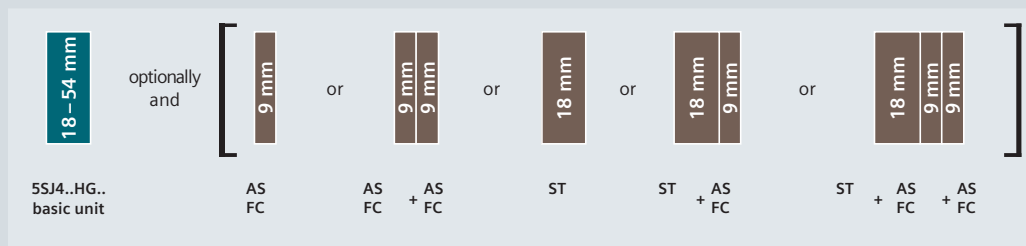
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2

5SJ4..HG.. miniature circuit breaker

According to UL489, 14/10 kA

Mounting width	1P "same polarity only"			1P			
	240 V AC	240 V AC	240 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
1 MW							
Rated current I _n	Characteristic			Characteristic			
	B	C	D	C	C	D	D
0.3 A	–	5SJ4114-7HG40	5SJ4114-8HG40	5SJ4114-7HG41	5SJ4114-7HG42	5SJ4114-8HG41	5SJ4114-8HG42
0.5 A	–	5SJ4105-7HG40	5SJ4105-8HG40	5SJ4105-7HG41	5SJ4105-7HG42	5SJ4105-8HG41	5SJ4105-8HG42
1 A	–	5SJ4101-7HG40	5SJ4101-8HG40	5SJ4101-7HG41	5SJ4101-7HG42	5SJ4101-8HG41	5SJ4101-8HG42
1.6 A	–	5SJ4115-7HG40	5SJ4115-8HG40	5SJ4115-7HG41	5SJ4115-7HG42	5SJ4115-8HG41	5SJ4115-8HG42
2 A	–	5SJ4102-7HG40	5SJ4102-8HG40	5SJ4102-7HG41	5SJ4102-7HG42	5SJ4102-8HG41	5SJ4102-8HG42
3 A	–	5SJ4103-7HG40	5SJ4103-8HG40	5SJ4103-7HG41	5SJ4103-7HG42	5SJ4103-8HG41	5SJ4103-8HG42
4 A	–	5SJ4104-7HG40	5SJ4104-8HG40	5SJ4104-7HG41	5SJ4104-7HG42	5SJ4104-8HG41	5SJ4104-8HG42
5 A	–	5SJ4111-7HG40	5SJ4111-8HG40	5SJ4111-7HG41	5SJ4111-7HG42	5SJ4111-8HG41	5SJ4111-8HG42
6 A	5SJ4106-6HG40	5SJ4106-7HG40	5SJ4106-8HG40	5SJ4106-7HG41	5SJ4106-7HG42	5SJ4106-8HG41	5SJ4106-8HG42
8 A	–	5SJ4108-7HG40	5SJ4108-8HG40	5SJ4108-7HG41	5SJ4108-7HG42	5SJ4108-8HG41	5SJ4108-8HG42
10 A	5SJ4110-6HG40	5SJ4110-7HG40	5SJ4110-8HG40	5SJ4110-7HG41	5SJ4110-7HG42	5SJ4110-8HG41	5SJ4110-8HG42
13 A	5SJ4113-6HG40	5SJ4113-7HG40	5SJ4113-8HG40	5SJ4113-7HG41	5SJ4113-7HG42	5SJ4113-8HG41	5SJ4113-8HG42
15 A	5SJ4118-6HG40	5SJ4118-7HG40	5SJ4118-8HG40	5SJ4118-7HG41	5SJ4118-7HG42	5SJ4118-8HG41	5SJ4118-8HG42
16 A	5SJ4116-6HG40	5SJ4116-7HG40	5SJ4116-8HG40	5SJ4116-7HG41	5SJ4116-7HG42	5SJ4116-8HG41	5SJ4116-8HG42
20 A	5SJ4120-6HG40	5SJ4120-7HG40	5SJ4120-8HG40	5SJ4120-7HG41	5SJ4120-7HG42	5SJ4120-8HG41	5SJ4120-8HG42
25 A	5SJ4125-6HG40	5SJ4125-7HG40	5SJ4125-8HG40	5SJ4125-7HG41	5SJ4125-7HG42	5SJ4125-8HG41	5SJ4125-8HG42
30 A	5SJ4130-6HG40	5SJ4130-7HG40	5SJ4130-8HG40	5SJ4130-7HG41	5SJ4130-7HG42	5SJ4130-8HG41	5SJ4130-8HG42
32 A	5SJ4132-6HG40	5SJ4132-7HG40	5SJ4132-8HG40	5SJ4132-7HG41	5SJ4132-7HG42	5SJ4132-8HG41	5SJ4132-8HG42
35 A	5SJ4135-6HG40	5SJ4135-7HG40	5SJ4135-8HG40	5SJ4135-7HG41	5SJ4135-7HG42	5SJ4135-8HG41	–
40 A	5SJ4140-6HG40	5SJ4140-7HG40	5SJ4140-8HG40	5SJ4140-7HG41	5SJ4140-7HG42	5SJ4140-8HG41	–
45 A	5SJ4145-6HG40	5SJ4145-7HG40	5SJ4145-8HG40	5SJ4145-7HG41	–	5SJ4145-8HG41	–
50 A	5SJ4150-6HG40	5SJ4150-7HG40	5SJ4150-8HG40	5SJ4150-7HG41	–	5SJ4150-8HG41	–
60 A	5SJ4160-6HG40	5SJ4160-7HG40	5SJ4160-8HG40	5SJ4160-7HG41	–	5SJ4160-8HG41	–
63 A	5SJ4163-6HG40	5SJ4163-7HG40	5SJ4163-8HG40	5SJ4163-7HG41	–	5SJ4163-8HG41	–

Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 ST Shunt trips

[See page 3/44](#)
[See page 3/46](#)
[See page 3/48](#)



2P				3P			
240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
2 MW				3 MW			
Characteristic				Characteristic			
C	C	D	D	C	C	D	D
5SJ4214-7HG41	5SJ4214-7HG42	5SJ4214-8HG41	5SJ4214-8HG42	5SJ4314-7HG41	5SJ4314-7HG42	5SJ4314-8HG41	5SJ4314-8HG42
5SJ4205-7HG41	5SJ4205-7HG42	5SJ4205-8HG41	5SJ4205-8HG42	5SJ4305-7HG41	5SJ4305-7HG42	5SJ4305-8HG41	5SJ4305-8HG42
5SJ4201-7HG41	5SJ4201-7HG42	5SJ4201-8HG41	5SJ4201-8HG42	5SJ4301-7HG41	5SJ4301-7HG42	5SJ4301-8HG41	5SJ4301-8HG42
5SJ4215-7HG41	5SJ4215-7HG42	5SJ4215-8HG41	5SJ4215-8HG42	5SJ4315-7HG41	5SJ4315-7HG42	5SJ4315-8HG41	5SJ4315-8HG42
5SJ4202-7HG41	5SJ4202-7HG42	5SJ4202-8HG41	5SJ4202-8HG42	5SJ4302-7HG41	5SJ4302-7HG42	5SJ4302-8HG41	5SJ4302-8HG42
5SJ4203-7HG41	5SJ4203-7HG42	5SJ4203-8HG41	5SJ4203-8HG42	5SJ4303-7HG41	5SJ4303-7HG42	5SJ4303-8HG41	5SJ4303-8HG42
5SJ4204-7HG41	5SJ4204-7HG42	5SJ4204-8HG41	5SJ4204-8HG42	5SJ4304-7HG41	5SJ4304-7HG42	5SJ4304-8HG41	5SJ4304-8HG42
5SJ4211-7HG41	5SJ4211-7HG42	5SJ4211-8HG41	5SJ4211-8HG42	5SJ4311-7HG41	5SJ4311-7HG42	5SJ4311-8HG41	5SJ4311-8HG42
5SJ4206-7HG41	5SJ4206-7HG42	5SJ4206-8HG41	5SJ4206-8HG42	5SJ4306-7HG41	5SJ4306-7HG42	5SJ4306-8HG41	5SJ4306-8HG42
5SJ4208-7HG41	5SJ4208-7HG42	5SJ4208-8HG41	5SJ4208-8HG42	5SJ4308-7HG41	5SJ4308-7HG42	5SJ4308-8HG41	5SJ4308-8HG42
5SJ4210-7HG41	5SJ4210-7HG42	5SJ4210-8HG41	5SJ4210-8HG42	5SJ4310-7HG41	5SJ4310-7HG42	5SJ4310-8HG41	5SJ4310-8HG42
5SJ4213-7HG41	5SJ4213-7HG42	5SJ4213-8HG41	5SJ4213-8HG42	5SJ4313-7HG41	5SJ4313-7HG42	5SJ4313-8HG41	5SJ4313-8HG42
5SJ4218-7HG41	5SJ4218-7HG42	5SJ4218-8HG41	5SJ4218-8HG42	5SJ4318-7HG41	5SJ4318-7HG42	5SJ4318-8HG41	5SJ4318-8HG42
5SJ4216-7HG41	5SJ4216-7HG42	5SJ4216-8HG41	5SJ4216-8HG42	5SJ4316-7HG41	5SJ4316-7HG42	5SJ4316-8HG41	5SJ4316-8HG42
5SJ4220-7HG41	5SJ4220-7HG42	5SJ4220-8HG41	5SJ4220-8HG42	5SJ4320-7HG41	5SJ4320-7HG42	5SJ4320-8HG41	5SJ4320-8HG42
5SJ4225-7HG41	5SJ4225-7HG42	5SJ4225-8HG41	5SJ4225-8HG42	5SJ4325-7HG41	5SJ4325-7HG42	5SJ4325-8HG41	5SJ4325-8HG42
5SJ4230-7HG41	5SJ4230-7HG42	5SJ4230-8HG41	5SJ4230-8HG42	5SJ4330-7HG41	5SJ4330-7HG42	5SJ4330-8HG41	5SJ4330-8HG42
5SJ4232-7HG41	5SJ4232-7HG42	5SJ4232-8HG41	5SJ4232-8HG42	5SJ4332-7HG41	5SJ4332-7HG42	5SJ4332-8HG41	5SJ4332-8HG42
5SJ4235-7HG41	5SJ4235-7HG42	5SJ4235-8HG41	–	5SJ4335-7HG41	5SJ4335-7HG42	5SJ4335-8HG41	–
5SJ4240-7HG41	5SJ4240-7HG42	5SJ4240-8HG41	–	5SJ4340-7HG41	5SJ4340-7HG42	5SJ4340-8HG41	–
5SJ4245-7HG41	–	5SJ4245-8HG41	–	5SJ4345-7HG41	–	5SJ4345-8HG41	–
5SJ4250-7HG41	–	5SJ4250-8HG41	–	5SJ4350-7HG41	–	5SJ4350-8HG41	–
5SJ4260-7HG41	–	5SJ4260-8HG41	–	5SJ4360-7HG41	–	5SJ4360-8HG41	–
5SJ4263-7HG41	–	5SJ4263-8HG41	–	5SJ4363-7HG41	–	5SJ4363-8HG41	–

Accessories

Auxiliary switches (AS) acc. to UL 489	Article No.
1 NO + 1 NC	5ST3010-OHG
2 NO	5ST3011-OHG
2 NC	5ST3012-OHG
Fault signal contacts (FC) acc. to UL 489	Article No.
1 NO + 1 NC	5ST3020-OHG
2 NO	5ST3021-OHG
2 NC	5ST3022-OHG
Shunt trips (ST) acc. to UL 489	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030-OHG
24 ... 48 V AC/DC	5ST3031-OHG

5SP3 selective main miniature circuit breakers (SHU)




25 kA, mounting on a 40 mm busbar



Mounting width	1P 230/400 V AC				3 × 1P 230/400 V AC
	1.5 MW				4.5 MW
Rated current I_n	Characteristic E				Characteristic E
	L1	L2	L3	L1 + L2 + L3	
16 A	5SP3716-2KK01	5SP3716-2KK02	5SP3716-2KK03	5SP3716-2	5SP3816-2
20 A	5SP3720-2KK01	5SP3720-2KK02	5SP3720-2KK03	5SP3720-2	5SP3820-2
25 A	5SP3725-2KK01	5SP3725-2KK02	5SP3725-2KK03	5SP3725-2	5SP3825-2
35 A	5SP3735-2KK01	5SP3735-2KK02	5SP3735-2KK03	5SP3735-2	5SP3835-2
40 A	5SP3740-2KK01	5SP3740-2KK02	5SP3740-2KK03	5SP3740-2	5SP3840-2
50 A	5SP3750-2KK01	5SP3750-2KK02	5SP3750-2KK03	5SP3750-2	5SP3850-2
63 A	5SP3763-2KK01	5SP3763-2KK02	5SP3763-2KK03	5SP3763-2	5SP3863-2



25 kA, mounting on a mounting rail

	1P 230/400 V AC	3× 1P 230/400 V AC	2P 230/400 V AC	3P 230/400 V AC	4P 230/400 V AC
Mounting width	1.5 MW 	4.5 MW 	3 MW 	4.5 MW 	6 MW 
Rated current I _n	Characteristic E	Characteristic E	Characteristic E	Characteristic E	Characteristic E
16 A	5SP3716-3	5SP3816-3	5SP3216-3	5SP3316-3	5SP3416-3
20 A	5SP3720-3	5SP3820-3	5SP3220-3	5SP3320-3	5SP3420-3
25 A	5SP3725-3	5SP3825-3	5SP3225-3	5SP3325-3	5SP3425-3
35 A	5SP3735-3	5SP3835-3	5SP3235-3	5SP3335-3	5SP3435-3
40 A	5SP3740-3	5SP3840-3	5SP3240-3	5SP3340-3	5SP3440-3
50 A	5SP3750-3	5SP3850-3	5SP3250-3	5SP3350-3	5SP3450-3
63 A	5SP3763-3	5SP3863-3	5SP3263-3	5SP3363-3	5SP3463-3

5SY17 device protection switches

Electromechanical




Mounting width

1P+AS

230 V AC/60 V DC

230 V AC/60 V DC

1 MW (18 mm)

Rated current I_n

Characteristic

F1 (quick)

F2 (slow)

0.5 A

5SY1705-2

5SY1705-4

1 A

5SY1701-2

5SY1701-4

2 A

5SY1702-2

5SY1702-4

4 A

5SY1704-2

5SY1704-4

6 A

5SY1706-2

5SY1706-4

8 A

5SY1708-2

5SY1708-4

10 A

5SY1710-2

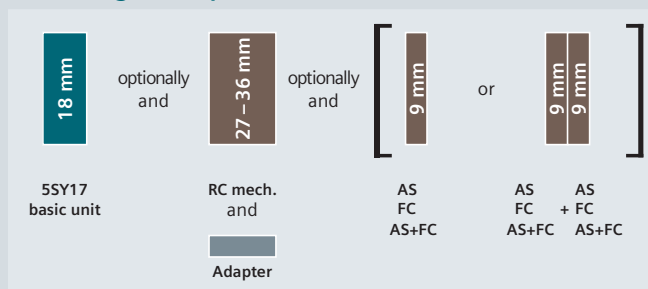
5SY1710-4

16 A

5SY1716-2

5SY1716-4

Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 RC mech. Remote controlled mechanisms

[See page 3/44](#)
[See page 3/46](#)
[See page 3/47](#)
[See page 3/50](#)

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022

Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1 MW		5ST3820-6


5SK9 device protection switches

Electronic



Mounting width 6.2 mm

1P+AS
24 V DC



Rated current I_n

1 A	5SK9101-1
2 A	5SK9102-1
3 A	5SK9103-1
4 A	5SK9104-1
6 A	5SK9106-1
8 A	5SK9108-1

3

Specific accessories

Connecting combs



Variant	Number of poles	Max. load current I_{max}	Article No.
For parallel infeed	2-pole	24 A	8WH9020-6BC10
		32 A	8WH9020-6CC10
	5-pole	24 A	8WH9020-6BF10
		32 A	8WH9020-6CF10
For remote signal – group signal	2-pole	32 A	8WH9020-6CC10

Reducing combs for 10 mm² terminal blocks

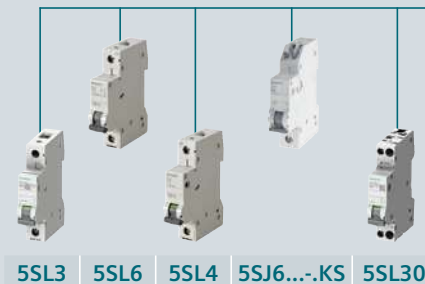


Variant	Number of poles	Max. load current I_{max}	Article No.
For bypassing the power supply	2-pole	40 A	8WH9020-0AC10

See general accessories, page 14/57 onwards

Overview of the modular system

Miniature circuit breakers



5SL3 5SL6 5SL4 5SJ6...-KS 5SL30

Auxiliary switches (AS)



		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)



	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)

	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062

Shunt trips (ST)



	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)



		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote controlled mechanisms (RC mech.)



		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070

5SM6 arc fault detection devices



		Article No.
Rated current up to 16 A	Standard	5SM6021-2
	For compact devices 1P+N in 1 MW	5SM6011-2
Rated current up to 40 A	Standard	5SM6024-2
	For compact devices 1P+N in 1 MW	5SM6014-2

Standard busbars



	Article No.
Cannot be cut	5ST36..
Can be cut	5ST37..

Compact busbars



	Article No.
Cannot be cut	5ST36..
Can be cut	5ST37..

from page 3/12

from page 3/18

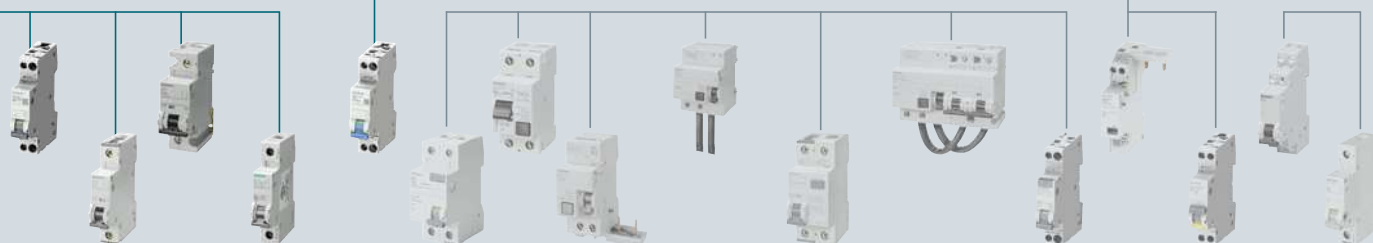
■ Suitable for all versions

□ Suitable for some versions

Arc fault detection

Residual current protective devices

Switching devices

3

Electrical accessories

Auxiliary switches (AS)

- Signals the contact position of the mounted device
- Version for the switching of small currents and voltages according to EN 61131-2 for control of programmable control systems (PLCs).
- Test button enables the testing of control circuits without the need to switch the mounted device

For combining with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	ON/OFF switches				
Auxiliary switches (AS)									
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
						1 CO	Standard	0.5 MW	5ST3016
						Auxiliary switches (AS) with TEST button			
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2
Auxiliary switches (AS) acc. to UL 489									
5SJ4...-HG	–	–	–	–	–	1 NO + 1 NC	Standard	0.5 MW	5ST3010-0HG
						2 NO	Standard	0.5 MW	5ST3011-0HG
						2 NC	Standard	0.5 MW	5ST3012-0HG

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

Further technical specifications		5ST3010, 5ST3010-2 5ST3011, 5ST3011-2 5ST3012, 5ST3012-2	5ST3013, 5ST3014 5ST3015, 5ST3016 5ST3013-0XX01	5ST3013-2 5ST3014-2 5ST3015-2	5ST3010-0HG 5ST3011-0HG 5ST3012-0HG	
Standards						
Standards		IEC/EN UL, CSA	IEC/EN 62019, IEC/EN 60947-5-1 UL 1077, CSA C22.2 No. 235		– UL 489, UL-File E321559, CSA 22.2 No. 5-02	
Contacts						
Minimum contact load		50 mA, 24 V		1 mA, 5 V DC	5 mA, 5 V DC	50 mA, 24 V
Maximum contact load		–		100 mA, 30 V DC	30 mA, 30 V DC	–
Contact load acc. to IEC/EN 62019 and IEC/EN 60947-5-1	230 V AC, AC-13	6 A	–		6 A	
	400 V AC, AC-14	2 A	–		2 A	
	24 V DC, DC-13	6 A	–		6 A (3 A)	
	60 V DC, DC-13	3 A	–		3 A (1.5 A)	
	110 V DC, DC-13	1 A	–		1 A (0.75 A)	
	220 V DC, DC-13	1 A	–		1 A (0.5 A)	
Contact load acc. to UL	120 V AC	–			6 A	
	240 V AC	–			4 A	
	277 V AC	–			3 A	
	480 V AC	–			1.5 A	
	60 V DC	–			3 A	
	125 V DC	–			1 A	
Service life, on average, with rated load	Actuations	20000			12000	
Safety						
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)				
Ambient conditions						
Permissible ambient temperature		–25 ... +55 °C				
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	50 m/s²				
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²				

Electrical accessories

Fault signal contacts (FC)

- Signals automatic tripping of the protective switching device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the protective switching device is tripped manually
- Version with TEST and RESET buttons enable the testing of control circuits without operation of the protective switching device
- Red RESET button in the operating handle indicates automatic tripping of the mounted protective switching device



For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices			
Fault signal contacts (FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
Fault signal contacts (FC) with TEST and RESET button							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2
Fault signal contacts (FC) acc. to UL 489							
5SJ4...-.HG	–	–	–	–	1 NO + 1 NC	0.5 MW	5ST3020-0HG
					2 NO	0.5 MW	5ST3021-0HG
					2 NC	0.5 MW	5ST3022-0HG

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

Standards			
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	
	UL, CSA	UL 1077, CSA C22.2 No. 235	UL 489, UL-File E321559, CSA 22.2 No. 5-02
Contacts			
Minimum contact load		50 mA, 24 V	
Contact load acc. to IEC/EN 62019 and IEC/EN 60947-5-1	230 V AC, AC-13	6 A	
	400 V AC, AC-14	2 A	
	24 V DC, DC-13	6 A	6 A (3 A)
	60 V DC, DC-13	3 A	3 A (1.5 A)
	110 V DC, DC-13	1 A	1 A (0.75 A)
	220 V DC, DC-13	1 A	1 A (0.5 A)
Contact load acc. to UL	120 V AC	–	6 A
	240 V AC	–	4 A
	277 V AC	–	3 A
	480 V AC	–	1.5 A
	60 V DC	–	3 A
	125 V DC	–	1 A
Service life, on average, with rated load	Actuations	20000	12000
Safety			
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse	
Connections			
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)	
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)	
Ambient conditions			
Permissible ambient temperature		–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C	
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles	
Mounting position		Any	
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	50 m/s²	
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²	



Auxiliary switches and fault signal contacts (AS+FC)

- Combines the function of both switches in a width of only 0.5 MW (9 mm).
- Signals the contact position of the mounted device
- Signals automatic tripping of the protective switching device in the event of a fault, such as an overload, a short circuit or a fault current
- If the fault signal contact is activated, the contact position does not change if the protective switching device is tripped manually

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices			
Auxiliary switches and fault signal contacts (AS+FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW	5ST3062

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

5ST3062

Standards		
Standards	IEC/EN UL, CSA	IEC/EN 62019, IEC/EN 60947-5-1 UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load acc. to IEC/EN 62019 and IEC/EN 60947-5-1	230 V AC, AC-13 400 V AC, AC-14	6 A 2 A
Contact load acc. to IEC/EN 62019 (acc. to IEC/EN 60947-5-1)	24 V DC, DC-13 60 V DC, DC-13 110 V DC, DC-13 220 V DC, DC-13	3 A (3 A) 3 A (1 A) 0.5 A (0.5 A) 0.5 A (0.3 A)
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	50 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²



Electrical accessories

Shunt trips (ST)

- For remote-controlled tripping of the mounted device

For combining with basic units			Rated voltage U _n	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBOs			
Shunt trips (ST)					
5SL4, 5SY, 5SP	5SV	5SU1 ¹⁾	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC	1 MW	5ST3031-0XX01
Shunt trips (ST) acc. to UL 489					
5SJ4...-HG	–	–	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030-0HG
			24 ... 60 V AC/DC	1 MW	5ST3031-0HG

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

Further technical specifications		5ST3030	5ST3031	5ST3031-0XX01	5ST3030-0HG	5ST3031-0HG
Standards						
Standards	IEC/EN	EN 60947-1			IEC/EN 60947-1	
	UL, CSA	–			UL 489, UL-File E321559, CSA 22.2 No. 5-02	
Supply						
Primary operating range		0.7 ... 1.1 × U _n				
Rated frequency f _n		50 ... 60 Hz		–	50 ... 60 Hz	
Contacts						
Minimum contact load		50 mA, 24 V		1 mA, 5 V	50 mA, 24 V	
Tripping operations		Max. 2000				
Service life, on average, with rated load	Actuations	20000			12000	
Safety						
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)				
Ambient conditions						
Permissible ambient temperature		–25 ... +55 °C		–40 ... +70 °C	–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	50 m/s ²				
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²				



Undervoltage releases (UR)

- Integrated, e.g. in EMERGENCY-STOP loops
- Ensure that the mounted device trips in the event of an emergency, which, in turn, ensures disconnection of the control circuit according to EN 60204.
- Trip the mounted device if the voltage is interrupted or too low or prevents the mounted device from closing

For combining with basic units			Rated voltage U _n	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBOs			
With integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 ¹⁾	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
Without integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 ¹⁾	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

5ST304.

Standards		
Standards	IEC/EN	EN 60947-1
Supply		
Primary operating range		0.85 ... $1.1 \times U_n$
Rated frequency f_n		50/60 Hz
Contacts		
Minimum contact load		50 mA, 24 V
Tripping operations		Max. 2000
Service life, on average, with rated load		20000 actuations
Safety		
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A
Connections		
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)
Ambient conditions		
Permissible ambient temperature		-25 ... +55 °C
Permissible storage temperature		-40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	50 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²

Electrical accessories

5ST3 remote controlled mechanisms (RC mech.)



- For locations that are spread out over a wide area or not permanently attended
- Permits direct and immediate access to the installation even if it is remote or in a location that is hard to access
- Permits fast reconnection after a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type of remote operating mechanism	Display	Ambient temperature	Vibration and shock requirements	Rated voltage U_n	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to DIN EN 61373 / DIN EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070

Further technical specifications

Standards				
Standards		EN 50557 (VDE 0640-20)		
Supply				
Rated frequency f _n		50 ... 60 Hz		
Rated power dissipation in standby		≤1 VA		
Contacts				
Service life, on average, with rated load		Actuations		10000
Number of remote switching operations per minute		2		
Number of automatic reclose attempts		–		3
Cable length in the control circuit		≤1500 m		
Sliding selector with locking device		–		
Integrated auxiliary switches		–		1W (1CO); 2 A; 250 V
Integrated fault signal contact		–		1W (1CO); 2 A; 250 V
Connections				
Conductor cross-sections		0.5 ... 1.5 mm² (AWG 14 ... 30)		
Terminal tightening torque		0.2 ... 0.25 Nm (2.0 lb-in)		
Ambient conditions				
Permissible storage temperature		–40 ... +55 °C		–40 ... +70 °C
Degree of protection		IP20		
Pollution degree for overvoltage category		3/II		

Suitable adapters for combination with miniature circuit breakers



Basic units	Mounting width			Adapters
	1–2 MW	3–4 MW	3–6 MW	
5SY4/5/6/7/8	■	–	–	5ST3820-1
	–	■	–	5ST3820-2
5SL3/4/6	■	–	–	5ST3820-6
	–	■	–	5ST3820-7
5SL60 / 5SY17	■	–	–	5ST3820-6
5SP4	■	–	–	5ST3820-1
	–	–	■	5ST3820-2



5SM6 arc fault detection devices (AFDD)

- Detects arcing faults
- Offers extremely effective protection against fires started by electrical faults
- Ensures adequate fire protection even in applications without residual current protective device

For combining with basic units			Rated current I _e	Mounting width (1 MW = 18 mm)	Article No.
Width of basic unit	Miniature circuit breakers	RCBOs			
1 MW	5SL60 2-pole (no KL types)	5SV1	Up to 16 A	1 MW	5SM6011-2
			Up to 40 A	1 MW	5SM6014-2
2 MW	5SY ¹⁾ , 5SL4 (1P+N devices only)	5SU1.5	Up to 16 A	1 MW	5SM6021-2
			Up to 40 A	1 MW	5SM6024-2

¹⁾ Not for 5SY5, 5SY8, 5SL60 2-pole

Further technical specifications

5SM6

Standards			
Standards			IEC/EN 62606
Supply			
Rated voltage U _n			230 V
Rated current I _n			Up to 16/40 A
Rated frequency			50 Hz
Power loss			0.6 W
Contacts			
Number of poles			2-pole
Service life		Average number of switching cycles	>10000
Safety			
Touch protection		Acc. to EN 50274 (VDE 0660-514)	Finger and back-of-hand safe
Degree of protection		Acc. to EN 60529 (VDE 0470-1)	IP20, with connected conductors
Overvoltage category			III
Tripping in the event of overvoltage			>275 V
Connections			
Terminal/conductor cross-sections	Solid and stranded		0.75 ... 16 mm ²
	Finely stranded with end sleeve		0.75 ... 10 mm ²
Terminal tightening torque			2.0 ... 2.5 Nm
Mains connection			Bottom
Ambient conditions			
Permissible ambient temperature			-25 ... +40 °C
Permissible storage temperature			-40 ... +75 °C
Resistance to climate at 95% relative air humidity		Acc. to IEC 60068-2-30	28 cycles, 55 °C
Pollution degree			2
CFC and silicone-free			Yes
Mounting position			Any

Suitable busbars, page 3/54 onwards

Suitable busbars and end caps, page 3/66 onwards

Mechanical accessories

Mechanical rotary operating mechanisms complete with handle



- For 5SY, 5SP4, 5SL (but not for 5SL0 1P + N in 1TE), 5TL1, 5TE2, 5TE8, 5SU1

Versions

Handle black

Handle red/yellow

Article No.

5ST3060

5ST3061

Terminal cover



- For miniature circuit breakers, but not for 5SL60..
- For additional covering of the screw openings per pole
- Lockable
- In the case of 5SY, also prevents removal of device from the standard mounting rail

Article No.

5ST3800

Handle locking devices

- To prevent undesired mechanical ON/OFF switching
- Sealable

For miniature circuit breakers

5SP4, 5SY

For padlocks with

Max. 3 mm shackle

Article No.

5ST3801

5SL, 5TL1

3 ... 6 mm shackle

5ST3806

Padlocks



- For 5ST3801 and 5ST3806 handle locking devices and remote operating mechanisms 5ST3054 ... 58, 5ST3070

Article No.

5ST3802

Locking devices

- Comprising 5ST3801 or 5ST3806 handle locking device and 5ST3802 padlock

For miniature circuit breakers

5SP4 and 5SY

Comprising

5ST3801 handle locking device,
5ST3802 padlock

Article No.

5ST3803

5SL, 5SV, 5TL1

5ST3806 handle locking device,
5ST3802 padlock

5ST3807

Spacers



- Can be placed on either side of the standard mounting rail. Two spacers allow for convenient cable routing


Mounting width

0.5 MW

Article No.

5TG8240

Device labels



- Adhesive
- For modular installation devices, e.g. 5SY, 5SL, 5TL1

Versions

15 x 6 mm, white (WIN 098)

15 x 6 mm, yellow (WIN 099)

Article No.

8WH8210-0AA35

8WH8210-0AA36

Terminal covers, gray



- For surface mounting, degree of protection IP40
- Sealable
- Can be used with 35 mm mounting rail

For widths up to

2.5 MW

4.5 MW

Article No.

5SW3004

5SW3005

Wall enclosures, gray



- For flush mounting, degree of protection IP40
- Can be used with 35 mm mounting rail

For widths up to

2.5 MW

4.5 MW

Article No.

5SW3006

5SW3007

Molded-plastic enclosures, gray



- For surface mounting, degree of protection IP54
- Sealable
- Can be used with 35 mm mounting rail
- With transparent hinged lid

For widths up to

4.5 MW

Article No.

5SW1200

Covers



- Can be assembled as mini distribution board
- Suitable for all devices
- Cover parts prepared for rail mounting of conventional label caps

Comprising

End plate

Angled profile

Alternatively flat profile

Article No.

5ST2134

5ST2135

5ST2136

Holders for front panel installation



- Universal use for devices from 1 to 6 MW

Cutout height

45^{+0.5} mm

Cutout width

23, 41, 59, 77, 95 or 113 mm

Article No.

7LF9006

Intermediate frames



- For 70 mm devices in 55 mm ALPHA SIMBOX small distribution boards

Versions

1-tier

2-tier

3-tier

4-tier

Article No.

8GB4561

8GB4562






8GB4563

8GB4564

Standard busbars

5ST36, fixed length, cannot be cut



For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				10 mm ²	16 mm ²
Single-phase				Article No.	Article No.
	For 2 MCBs 1P	2 MW	33 mm	5ST3600	5ST3630
	For 6 MCBs 1P	6 MW	105 mm	5ST3601	5ST3631
	For 12 MCBs 1P	12 MW	212 mm	5ST3602	5ST3632
Two-phase / single-phase + N				Article No.	Article No.
 Ø 10 mm ² Ø 16 mm ²	For 2 MCBs (2P / 1P+N)	4 MW	76 mm	5ST3606	5ST3636
	For 3 MCBs (2P / 1P+N)	6 MW	105 mm	5ST3607	5ST3637
	For 6 MCBs (2P / 1P+N)	12 MW	210 mm	5ST3608	5ST3638
Three-phase				Article No.	Article No.
 Ø 10 mm ² Ø 16 mm ²	For 2 MCBs 3P	6 MW	102 mm	5ST3613	5ST3643
	For 3 MCBs 3P	9 MW	157.5 mm	5ST3614	5ST3644
	For 4 MCBs 3P	12 MW	210 mm	5ST3615	5ST3645
	Combi pack: 20× 5ST3613 + 10× 5ST3614 + 50× 5ST3615 + 50× 5ST3655			5ST3656	–
	Combi pack: 20× 5ST3643 + 10× 5ST3644 + 50× 5ST3645 + 50× 5ST3655			–	5ST3657
Four-phase / three-phase + N				Article No.	Article No.
 Ø 10 mm ² Ø 16 mm ²	For 2 MCBs (4P / 3P+N)	8 MW	138 mm/ 140 mm	5ST3621	5ST3651
	For 3 MCBs (4P / 3P+N)	12 MW	210 mm	5ST3622	5ST3652
 Ø 10 mm ² Ø 16 mm ²	For 6 MCBs (1P+N)	12 MW	210 mm	5ST3623	5ST3653

For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm ²	16 mm ²
Single-phase				Article No.	Article No.
	For 2 MCBs 1P	2 MW	40 mm	5ST3603	5ST3633
	For 6 MCBs 1P	6 MW	158 mm	5ST3604	5ST3634
	For 9 MCBs 1P	9 MW	237 mm	5ST3605	5ST3635
Two-phase / single-phase + N				Article No.	Article No.
	For 2 MCBs (2P / 1P+N)	4 MW	76 mm	–	5ST3640
	For 3 MCBs (2P / 1P+N)	6 MW	121 mm	–	5ST3641
	For 5 MCBs (2P / 1P+N)	10 MW	210 mm	–	5ST3642
Three-phase				Article No.	Article No.
	For 2 MCBs 3P	6 MW	115 mm	5ST3616	5ST3646
	For 4 MCBs 3P	12 MW	237 mm	5ST3617	5ST3647
	For 6 MCBs 1P	9 MW	156 mm/ 158 mm	5ST3618	5ST3648
	For 9 MCBs 1P	12 MW	227 mm	5ST3620	5ST3650

For MCBs with RCCB

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				10 mm²	16 mm²
Three-phase				Article No.	Article No.
	For 8 MCBs 1P with 1 RCCB 3P+N, N right	12 MW	210 mm	5ST3624	5ST3654
	For 8 MCBs 1P with 1 RCCB 3P+N, N left	11 MW	192 mm	5ST3667	5ST3668





Accessories

Terminals for 5ST36 and 5ST37		Article No.	Terminals for infeed at side		Article No.
For conductors up to 25 mm ²	Cable entry on the left	5ST3768-4	For conductors up to 25 mm ²	Short	5ST3768
	Cable entry in the center	5ST3768-3		Short, IP20	5ST3771-2
	Cable entry on the right	5ST3768-5			
For conductors up to 50 mm ²	Cable entry on the left	5ST3760-4	Touch protection		Article No.
	Cable entry in the center	5ST3760-3	For free connections, yellow (RAL 1004) 5x 1 pin		5ST3655
	Cable entry on the right	5ST3760-5			



Standard busbars

5ST37, can be cut

For miniature circuit breakers (MCBs)


Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Color	Conductor cross-section	
						10 mm ²	16 mm ²
Single-phase, straight						Article No.	Article No.
	For MCB 1P+N compact	12 MW	216 mm	■	Gray	5ST3762	–
					Blue	5ST3687-0	–
		56 MW	1016 mm	–	Gray	5ST3764	–
					Blue	5ST3787-0	–
Single-phase, angled 45°						Article No.	Article No.
	For MCB 1P+N compact	12 MW	216 mm	■	Blue	5ST3763	–
		56 MW	1016 mm	–	Blue	5ST3765	–
Single-phase, angled 90°						Article No.	Article No.
	For MCBs 1P	12 MW	214 mm	■		5ST3730	5ST3700
		56 MW	1016 mm	–		5ST3731	5ST3701
Two-phase / single-phase + N						Article No.	Article No.
	For 2MW devices (2P / 1P+N)	12 MW	214 mm	■		5ST3734	5ST3704
		56 MW	1016 mm	–		5ST3735	5ST3705

For MCBs equipped with auxiliary switch (AS) / fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section	
					10 mm ²	16 mm ²
Single-phase, angled 90°					Article No.	Article No.
	For MCBs 1P	12 MW	214 mm	■	5ST3732	5ST3702
		56 MW	1016 mm	–	5ST3733	5ST3703
Two-phase / single-phase + N					Article No.	Article No.
	For 2MW devices (2P / 1P+N)	12 MW	214 mm	■	5ST3736	5ST3706
		56 MW	1016 mm	–	5ST3737	5ST3707



For MCBs equipped with undervoltage release (UR) / shunt trips (ST)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section	
					10 mm ²	16 mm ²
Two-phase						Article No.
	For MCBs 1P with UR / ST	56 MW	1016 mm	–	5ST3735-2	–

Accessories



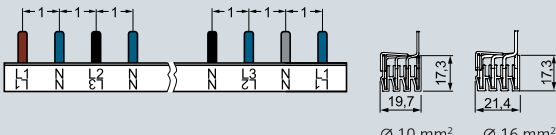
Terminals for 5ST36 and 5ST37		Article No.
For conductors up to 25 mm ²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors up to 50 mm ²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for infeed at side		Article No.
For conductors up to 25 mm ²	Short	5ST3768
	Short, IP20	5ST3771-2
End caps		Article No.
For single-phase busbars (MCB 1P+N compact)	Gray	5ST3766
	Blue	5ST3767
	White	5ST3748
For two-phase busbars		5ST3750
Touch protection		Article No.
For free connections, yellow (RAL 1004) 5× 1 pin		5ST3655




Standard busbars

5ST37, can be cut

For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm ²	16 mm ²
Three-phase					Article No.	Article No.
	For MCBs 3P	12 MW	214 mm	■	5ST3738	5ST3708
		56 MW	1016 mm	—	5ST3740	5ST3710
Four-phase / three-phase + N					Article No.	Article No.
	For MCBs 4P or 3P+N	12 MW	214 mm	■	5ST3745	5ST3715
		56 MW	1016 mm	—	5ST3746	5ST3716
	For RCBOs or MCBs 1P+N	56 MW	1000 mm	—	5ST3770-2	5ST3770-3

For MCBs equipped with auxiliary switch (AS) / fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm ²	16 mm ²
Three-phase					Article No.	Article No.
	For MCBs 3P	12 MW	214 mm	■	5ST3741	5ST3711
		56 MW	1016 mm	–	5ST3742	5ST3712
	For MCBs 1P	12 MW	214 mm	■	5ST3743	5ST3713
		56 MW	1016 mm	–	5ST3744	5ST3714
Four-phase / three-phase + N					Article No.	Article No.
	For MCBs 1P+N	56 MW	1016 mm	–	5ST3746-2	–



For MCBs with line-side RCCB or RCCBs equipped with AS/FC devices

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section	
					10 mm ²	16 mm ²
Four-phase / three-phase + N					Article No.	Article No.
	For RCCBs/MCBs	56 MW	1016 mm	–	5ST3746-2	–
	For 6 MCBs 1P+N with 1 RCCB 3P+N, N right	16 MW	292 mm	■	5ST3770-4	5ST3770-5

3







Accessories

Terminals for 5ST36 and 5ST37		Article No.	End caps		Article No.
For conductors up to 25 mm ²	Cable entry on the left	5ST3768-4	For three-phase busbars		5ST3750
	Cable entry in the center	5ST3768-3	For four-phase busbars		5ST3718
	Cable entry on the right	5ST3768-5	Touch protection		Article No.
For conductors up to 50 mm ²	Cable entry on the left	5ST3760-4	For free connections, yellow (RAL 1004) 5x 1 pin		5ST3655
	Cable entry in the center	5ST3760-3			
	Cable entry on the right	5ST3760-5			





Standard busbars

5ST37 acc. to UL 508, can be cut

For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				18 mm ²	25 mm ²
Single-phase				Article No.	Article No.
	For MCBs 1P or fuse holders 10 x 38 mm/class CC	56 MW	1000 mm	5ST3701-0HG	–
	For MCBs 1P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3701-2HG
Two-phase				Article No.	Article No.
	For MCBs 2P or fuse holders 10 x 38 mm/class CC	56 MW	1000 mm	5ST3705-0HG	–
	For MCBs 2P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3705-2HG
Three-phase				Article No.	Article No.
	For MCBs 3P or fuse holders 10 x 38 mm/class CC	56 MW	1000 mm	5ST3710-0HG	–
	For MCBs 3P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3710-2HG

für LS mit angebautem Hilfsstrom- (AS) / Fehlersignalschalter (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				18 mm ²	25 mm ²
Single-phase				Article No.	Article No.
	For MCBs 1P	56 MW	1000 mm	5ST3703-OHG	–
Two-phase				Article No.	Article No.
	For MCBs 2P	56 MW	1000 mm	5ST3707-OHG	–
Three-phase				Article No.	Article No.
	For MCBs 3P	56 MW	1000 mm	5ST3712-OHG	–
	For MCBs 1P	56 MW	1000 mm	5ST3714-OHG	–

3




Accessories

Terminals according to UL 508		Article No.	Touch protection acc. to UL 508		Article No.
For infeed at the device	35 mm ²	5ST3770-0HG	For open terminals, yellow 5× 1 pin		5ST3655-0HG
For infeed at the busbar	50 mm ²	5ST3770-1HG			
End caps acc. to UL 508		Article No.			
For single-phase busbars		5ST3748-0HG			
For two- and three-phase busbars		5ST3750-0HG			

Standard busbars




5ST3.. acc. to UL 489 specially for 5SJ4... -HG..

Fixed length, cannot be cut, for miniature circuit breakers (MCBs) ¹⁾





Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 16 mm ²
Single-phase				Article No.
	For 6 MCBs 1P	6 MW	100 mm	5ST3663-0HG
	For 12 MCBs 1P	12 MW	205 mm	5ST3663-1HG
	For 18 MCBs 1P	18 MW	310 mm	5ST3663-2HG
Two-phase				Article No.
	For 6 MCBs 1P	6 MW	100 mm	5ST3664-0HG
	For 12 MCBs 1P	12 MW	205 mm	5ST3664-1HG
	For 18 MCBs 1P	18 MW	310 mm	5ST3664-2HG
Three-phase				Article No.
	For 2 MCBs 3P	6 MW	100 mm	5ST3665-0HG
	For 4 MCBs 3P	12 MW	205 mm	5ST3665-1HG
	For 6 MCBs 3P	18 MW	310 mm	5ST3665-2HG

¹⁾ All unassigned pins of the busbars that cannot be cut must be covered with 5ST3666-1HG touch protection covers.

Can be cut, for MCBs

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm ²
Single-phase				Article No.
	For MCBs 1P	56 MW	1016 mm	5ST3701-3HG
Two-phase				Article No.
	For MCBs 2P	56 MW	1016 mm	5ST3705-3HG
Three-phase				Article No.
	For MCBs 3P	56 MW	1016 mm	5ST3710-3HG

Can be cut, for MCBs equipped with auxiliary switch (AS) / fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm ²
Single-phase				
	For MCBs 1P	56 MW	1016 mm	Article No. 5ST3703-3HG
Two-phase				
	For MCBs 2P	56 MW	1016 mm	Article No. 5ST3707-3HG
Three-phase				
	For MCBs 3P	56 MW	1016 mm	Article No. 5ST3712-3HG
	For MCBs 1P	56 MW	1016 mm	5ST3714-3HG

Accessories

Terminals according to UL 489		Article No.
For infeed at the 5SJ4... -HG.. miniature circuit breaker	16 mm ²	5ST3666-0HG
	18 mm ²	5ST3770-3HG
For infeed at the busbar	16 mm ²	5ST3666-2HG
End caps acc. to UL 489		Article No.
For single-, two- and three-phase busbars		5ST3750-3HG
Touch protection acc. to UL 489		Article No.
For open terminals, yellow 3x 1 pin	For 5ST37...-HG busbars that cannot be cut	5ST3666-1HG
	For 5ST37...-3HG busbars that can be cut	5ST3655-3HG

Compact busbars








5ST36, fixed length, cannot be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm ²
Two-phase / single-phase + N, for infeed via RCCB					
	For 1× RCCB 1P+N and 5× compact devices equipped with 5SM6 arc fault detection device	12 MW	216 mm	■	Article No. 5ST3685-0
Two-phase / single-phase + N					
	For compact devices	6 MW 9 MW 12 MW	113 mm 166 mm 218 mm	■	Article No. 5ST3674-6 new 5ST3674-7 new 5ST3674-0
	For 12x CBE (device protection switch) 5SY17	12 MW	218 mm	■	5ST3674-1 new
	For 6× compact devices equipped with 5SM6 arc fault detection device	11 MW	200 mm	■	5ST3676-0
Four-phase / three-phase + N					
	For compact devices	6 MW 9 MW 12 MW 14 MW	113 mm 116 mm 218 mm 254 mm	■	Article No. 5ST3673-6 new 5ST3673-7 new 5ST3673-0 5ST3673-4 new
	For 6× compact devices equipped with 5SM6 arc fault detection device	11 MW	200 mm	■	5ST3675-0

5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm ²
Two-phase / single-phase + N, for infeed via RCCB					
	For 1× RCCB 1P+N and 10× compact devices	12 MW	215 mm	■	Article No. 5ST3784-0
	For 1× RCCB 1P+N (RCCB N-left only) and 10× compact devices	12 MW	215 mm	■	5ST3784-0KL

5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm ²
Two-phase / single-phase + N					
	For compact devices	60 MW	1060 mm	–	Article No. 5ST3774-0
	For compact devices equipped with 5SM6 arc fault detection device	59 MW	1042 mm	–	5ST3776-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3778-0
	For compact devices equipped with 5SM6 arc fault detection device and auxiliary switch	58.5 MW	1036 mm	–	5ST3780-0
	For 2 MW units (MCBs or RCBOs) with 5SM6 arc fault detection device and auxiliary switch	54 MW	956 mm	–	5ST3786-0
Four-phase / three-phase + N, for infeed via RCCB					
	For 1× RCCB 3P+N and 8× compact devices	12 MW	216 mm	■	Article No. 5ST3783-0
	For 1× RCCB 3P+N (RCCB N-left only) and 8× compact devices	12 MW	216 mm	■	5ST3783-OKL
Four-phase / three-phase + N					
	For compact devices	60 MW	1060 mm	–	Article No. 5ST3773-0
	For compact devices equipped with 5SM6 arc fault detection device	59 MW	1042 mm	–	5ST3775-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3777-0

Accessories

Terminals for infeed at side	Article No.	Touch protection	Article No.
For conductors up to 25 mm ² Short, IP20	5ST3771-2	For free connections, yellow (RAL 1004)	For pins L1, N 5ST3655
End caps	Article No.		For pins L2, L3 5ST3655-0HG
Two- and three-phase busbars	5ST3788-0		

Accessories for busbars

General accessories

Terminals



For conductors	Version	Cable entry	Infeed	Article No.
Up to 25 mm ²	Short	–	Side	5ST3768
	Short, IP20	–	Side	5ST3771-2
Up to 25 mm ²	–	Center	–	5ST3768-3
		Left	–	5ST3768-4
		Right	–	5ST3768-5
Up to 30 mm ²	–	–	Busbar	5ST3770-1HG
Up to 35 mm ²	–	–	Device	5ST3770-0HG
Up to 35 mm ²	For 5SJ4... -HG..	–	Miniature circuit breaker	5ST3666-0HG
	For 5ST37...-3HG that can be cut	–	Miniature circuit breaker	5ST3770-3HG
Up to 50 mm ²	–	Center	–	5ST3760-3
		Left	–	5ST3760-4
		Right	–	5ST3760-5
Up to 50 mm ²	–	–	Busbar	5ST3666-2HG

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (acc. to UL 489)	5ST3 compact
■	■			
■	■			
	■			
	■			
	■			
		■		
		■		
			■	
			■	
	■			
	■			
	■			
			■	

Accessories for busbars

General accessories

Touch protection



Version	Scope of supply	Version	Article No.
For free connections, yellow (RAL 1004)	5× 1 pin	–	5ST3655
			5ST3655-0HG
	3× 1 pin	–	5ST3666-1HG
		–	5ST3655-3HG
For 10 mm ² conductors	20× 5ST3613 + 10× 5ST3614 + 50× 5ST3615 + 50× 5ST3655	–	5ST3656
For 16 mm ² conductors	20× 5ST3643 + 10× 5ST3644 + 50× 5ST3645 + 50× 5ST3655	For 5ST337..-3HG	5ST3657

End caps



Version	Color	Article No.
For single-phase busbars	Gray	5ST3748
For two- and three-phase busbars	Gray	5ST3750
For four-phase busbars	Gray	5ST3718
For single-, two- and three-phase busbars	Gray	5ST3750-3HG
–	Gray	5ST3766
–	Blue	5ST3767
For single-phase busbars	Gray	5ST3748-0HG
For two- and three-phase busbars	Gray	5ST3750-0HG
For two- and four-phase compact busbars	Gray	5ST3788-0

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (acc. to UL 489)	5ST3 compact
■		■	■	■
			■	■
			■	
■				
■				
	■			
	■			
	■			
			■	
■				
■				
			■	
			■	
				■

Accessories for busbars

General accessories

Series connectors

	Conductor cross-section	Length of cable	Color	Number of phases	Article No.
	10 mm ²	125 mm	N conductor blue	1	5ST3781-0
			Cable black	1	5ST3791-0
				3	5ST3793-0
		150 mm	N conductor blue	1	5ST3781-1
			Cable black	1	5ST3791-1
				3	5ST3793-1
	16 mm ²	125 mm	N conductor blue	1	5ST3782-0
			Cable black	1	5ST3792-0
				3	5ST3794-0
		150 mm	N conductor blue	1	5ST3782-1
			Cable black	1	5ST3792-1
				3	5ST3794-1
		200 mm	N conductor blue	1	5ST3781-2
			Cable black	1	5ST3791-2
				3	5ST3793-2
			3× cables black and 1× N conductor blue	3 + N	5ST3793-3

[illegible]

Distribution blocks for standard rail m

Acc. to IEC

Distribution blocks acc. to IEC



Number of poles	Operational voltage U_e	Rated current I_e	Mounting width	Article No.
4-pole	690 V AC	80 A	5 MW	5ST2501
		125 A	5.5 MW	5ST2502
		160 A	9 MW	5ST2503

Further technical specifications

Further technical specifications			5ST2501	5ST2502	5ST2503
Standards					
Standards			IEC 60947-7-1		
Supply					
Operational voltage AC			690 V		
Max. rated current			80 A	125 A	160 A
Conductor cross-section					
Inputs per pole	Solid/stranded		1× 2.5 ... 16 mm ²	1× 6 ... 35 mm ²	1× 10 ... 50 mm ²
	Finely stranded with end sleeve		1× 1.5 ... 10 mm ²	1× 6 ... 25 mm ²	1× 10 ... 35 mm ²
Outputs per pole	Solid/stranded		8× 1.5 ... 10 mm ²	5× 1.5 ... 6 mm ² 2× 4 ... 16 mm ²	8× 2.5 ... 16 mm ² 3× 10 ... 35 mm ²
	Finely stranded with end sleeve		8× 1.5 ... 10 mm ²	5× 1.5 ... 6 mm ² (small) 2× 4 ... 10 mm ² (large)	8× 1.5 ... 16 mm ² (small) 3× 10 ... 25 mm ² (large)
Tightening torque					
Inputs	Screw terminals		13.5 lb-in (1.5 Nm)		3.5 ... 5 lb-in (2 Nm)
	Tools		PZ2		
Outputs	Screw terminals	Large	13.5 lb-in (1.5 Nm)		
		Small	–	7.2 lb-in (0.8 Nm)	13.5 lb-in (1.5 Nm)
	Tools	Large	PZ1	PZ2	
		Small	–	PZ1	PZ2
Safety					
Rated peak withstand current I _{pk}			21.6 kA	24 kA	20 kA
Rated short-time withstand current I _{cw} (1 s)			3 kA	4.2 kA	6.2 kA
Ambient conditions					
Permissible ambient temperature			–25 ... +70 °C		
Degree of protection	Acc. to EN 60529		IP 20		
Approved cable			Copper		

According to IEC and UL

Distribution blocks acc. to IEC and UL



Number of poles	Operational voltage U _e	Rated current I _e	Mounting width	Article No.
1-pole	600 V AC	80 A	1.5 MW	5ST2504
		125 A	1.5 MW	5ST2505
		160 A	2 MW	5ST2507
		250 A	2.5 MW	5ST2508
		350 A	2.5 MW	5ST2511


Connector for 5ST2505 distribution board



- Touch protection
- 20 mm²
- 32 mm

Version	Article No.
Single-phase	5ST2506

Terminal lug for ring terminal ends



Versions	Article No.
For 5ST2508 distribution block	5ST2510
For 5ST2511 distribution block	5ST2512

Further technical specifications

Standards							
Standards			UL 1059 / UL 486E / IEC 60947-7-1 UL File No. E80027 / XCFR2 C22.2 No. 158 -1987 / XCFR8				
Supply							
Operational voltage		UL	600 V AC				
		IEC	1000/1500 V AC/DC				
Max. rated current		UL	80 A	115 A	160 A	230 A	310 A
		IEC	80 A	125 A	160 A	250 A	400 A
Conductor cross-section							
Inputs per pole	Solid/stranded	Large	3× 2.5 ... 25 mm ²	10 ... 35 mm ²	10 ... 70 mm ²	35 ... 120 mm ²	95 ... 185 mm ²
			AWG 3× 14 ... 4	AWG 1× 8 ... 2	AWG 1× 8 ... 2/0	AWG 1× 2 ... 4/0	AWG 1× 3/0 ... 350 MCM
		Small	–	2.5 ... 25 mm ²	–	–	–
			–	AWG 1× 14 ... 6	–	–	–
	Finely stranded with end sleeve	Large	3× 2.5 ... 16 mm ²	10 ... 35 mm ²	10 ... 50 mm ²	35 ... 95 mm ²	95 ... 150 mm ²
			AWG 3× 14 ... 6	AWG 1× 8 ... 2	AWG 1× 8 ... 1	AWG 1× 2 ... 3/0	AWG 3/0 ... 300 MCM
		Small	–	2.5 ... 25 mm ²	–	–	–
			–	AWG 1× 14 ... 6	–	–	–
Outputs per pole	Solid/stranded	Top	2.5 ... 6 mm ²	2.5 ... 16 mm ²	2.5 ... 16 mm ²	2.5 ... 10 mm ²	2× 2.5... 35 mm ²
			AWG 4× 14 ... 10	AWG 6× 14 ... 4	AWG 6× 14 ... 4	AWG 4× 16 ... 8	AWG 2× 14 ... 2
		Center	–	–	–	2.5 ... 16 mm ²	5× 2.5 ... 16 mm ²
			–	–	–	AWG 5× 14 ... 6	–
		Bottom	2.5 ... 6 mm ²	–	–	2× 2.5... 35 mm ²	4× 2.5 ... 10 mm ²
			AWG 4× 14 ... 10	–	–	AWG 2× 14 ... 2	AWG 4× 14 ... 8
	Finely stranded with end sleeve	Top	2.5 ... 6 mm ²	2.5 ... 16 mm ²	–	2× 2.5... 25 mm ²	–
			AWG 4× 14 ... 10	AWG 6× 14 ... 6	AWG 6× 14 ... 4	AWG 2× 14 ... 4	–
		Bottom	2.5 ... 6 mm ²	–	–	2× 2.5... 25 mm ²	4× 2.5 ... 25 mm ²
			AWG 4× 14 ... 10	–	–	AWG 2× 14 ... 4	AWG 5× 14 ... 4

Continued on next page

Distribution blocks for standard rail m

According to IEC and UL (continued)

Further technical specifications			5ST2504	5ST2505	5ST2507	5ST2508	5ST2511	
Tightening torque								
Inputs	Screw terminals		13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	31 ... 44 lb-in (3.5 ... 5 Nm)	44 ... 53 lb-in (5 ... 6 Nm)	170 ... 186 lb-in (19 ... 21 Nm)	222 lb-in (25 Nm)	
	Tools		PZ2	Allen key 4 mm	Allen key 5 mm	Allen key 6 mm	Allen key 8 mm	
Outputs	Screw terminals	Large	13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	17.7 ... 26.5 lb-in (2 ... 3 Nm)	13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	31 ... 62 lb-in (3.5 ... 7 Nm)		
		Small	7 ... 13.2 lb-in (0.8 ... 1.5 Nm)	–		18 ... 27 lb-in (2 ... 3 Nm)		
	Tools	Large	PZ2				Standard screwdriver	
		Small	PZ1	PZ2			Standard screwdriver	
Safety								
Rated peak withstand current I _{pk}			2.7 kA	30 kA		51 kA		
Rated short-time withstand current I _{cw} (1 s)			1.9 kA	4.2 kA	11 kA		21 kA	
Overcurrent protection class			J					
Short circuit current rating (SCCR)	RMS Sym A		100 kA					
Electrical isolation	Creepage distances		1/2" (12.7 mm)					
	Clearances		3/8" (9.5 mm)					
Ambient conditions								
Permissible ambient temperature			–25 ... +70 °C					
Degree of protection	Acc. to EN 60529		IP20					
Fire class			UL 94V-0					
Approved cable			Copper					

SIKclip wiring system

SIKclip busbar



Length	Article No.
12 MW	5ST2520
24 MW	5ST2521
36 MW	5ST2522

Connecting cables with plug



Length	Conductor cross-section	Color	Article No.
120 mm	6 mm ²	Black	5ST2523
		Blue	5ST2524
	10 mm ²	Black	5ST2525
		Blue	5ST2526
200 mm	6 mm ²	Black	5ST2527
		Blue	5ST2528
	10 mm ²	Black	5ST2530
		Blue	5ST2531

Crimp connector



• For connection to cables 4/6 mm ²	Article No.
	5ST2532

Mounting brackets



• For mounting on the rear of the standard mounting rail (pair)	Article No.
	5ST2533

Further technical specifications

5ST25..

Standards	
Test specifications	EN 60947-1, EN 61439-1
Rated values	
Rated operational voltage U _n	400 V AC
Max. rated current I _n	250 A
Max. rated output current I _n (at 40 °C ambient temperature)	63 A
Rated insulation voltage	660 V AC
Test voltage (50 Hz)	2.5 kV
Ambient conditions	
Degree of protection	IP20
Connecting cables	40 A (6 mm ²), 63 A (10 mm ²)
Connecting cable type	H07VK
Ambient temperature	-5 ... +60 °C