

SIEMENS

Data sheet for SINAMICS V20

Article No. : 6SL3210-5BE21-1CV1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :



Figure similar

Rated data		
Input		
Number of phases	3 AC	
Line voltage	380 ... 480 V -15 % +10 %	
Line frequency	47 ... 63 Hz	
Output		
Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC ¹⁾
Rated power (LO)	1.10 kW	1.50 hp
Rated power (HO)	1.10 kW	1.50 hp
Rated current (LO)	3.10 A	3.10 A
Rated current (HO)	3.10 A	3.10 A
Rated current (IN)	3.10 A	
Pulse frequency	4.00 kHz	
Output frequency	0 ... 550 Hz	
Overload capability		
Low Overload (LO)		
110 % rated output current for 60 s, cycle time 300 s		
High Overload (HO)		
150 % rated output current for 60 s, cycle time 300 s		
General tech. specifications		
Power factor λ	0.72	
Offset factor cos φ	0.95	
Efficiency η	0.98	
Filter class (integrated)	Class A	
With integrated braking chopper	Yes	
Communication		
Communication	USS, Modbus RTU	
Inputs / outputs		
Standard digital inputs		
Number	4	
Digital outputs		
Number as relay changeover contact	1	
Number as transistor	1	
Analog inputs		
Number	2 (Can be used as additional digital input)	
Analog outputs		
Number	1	


Ambient conditions	
Cooling	External fan
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation ²⁾	-10 ... 60 °C (14 ... 140 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)
Relative humidity	
Max. operation	95 %
Connections	
Max. motor cable length	
Shielded	10 m (32.81 ft)
Unshielded	50 m (164.04 ft)
Mechanical data	
Mounting position	Wall mounting / side-by-side mounting
Degree of protection	IP20 / UL open type
Frame size	FSA
Net weight	1.10 kg (2.43 lb)
Dimensions	
Width	90.0 mm (3.54 in)
Height	166.0 mm (6.54 in)
Depth	145.5 mm (5.73 in)
Standards	
Compliance with standards	CE, cULus, C-Tick (RCM), KC
CE marking	EN 61800-5-1 /EN 60204-1 and EN 61800-3

SIEMENS

Data sheet for SINAMICS V20

Article No. : 6SL3210-5BE21-1CV1

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	26.0 %

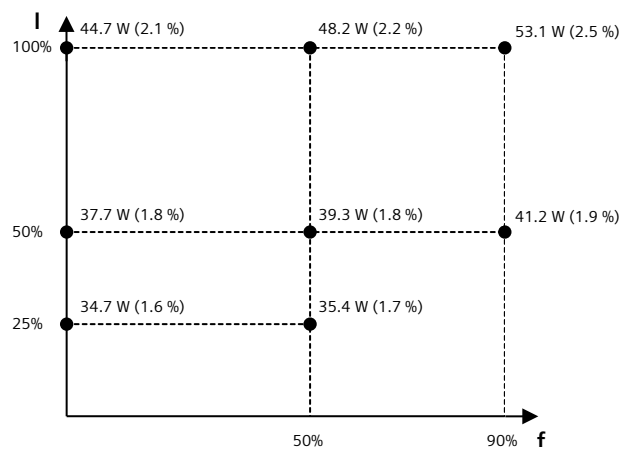

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V
²⁾Please observe derating at temperatures of 40 °C or above