



## SELECTION OF AC MOTOR MODEL

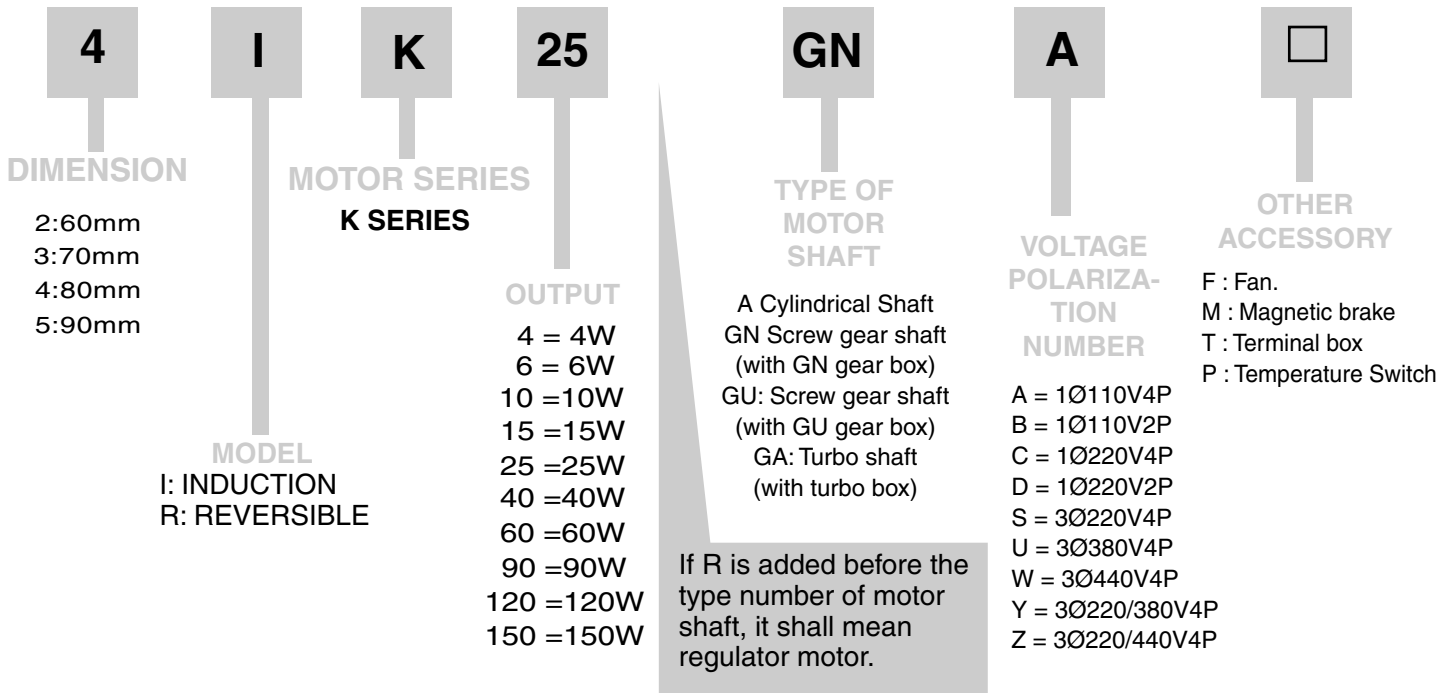

## SELECTION OF GEAR MODEL

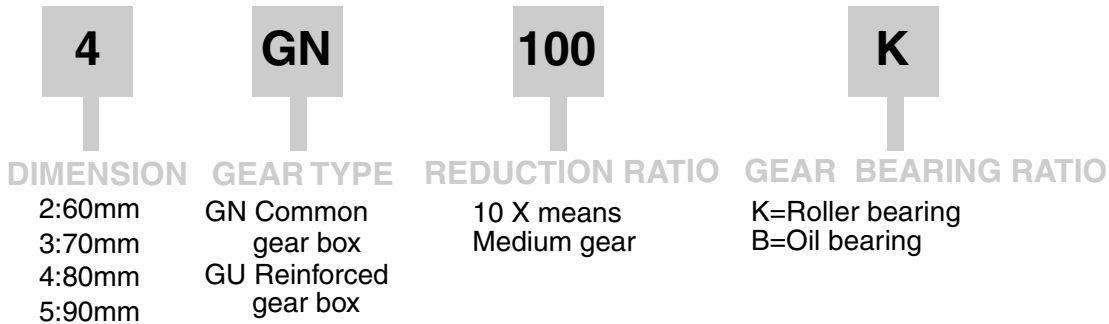

### LIST OF REDUCTION RATION AND TORQUE OF REDUCERS FOR DIFFERENT MOTORS

Figure in □ shall mean reduction ratio. Figure in □ shall mean revolution reverse to the motor. 4W and 10W motors are available.

APPROPRIATE MOTOR	REDUCTION RATIO TYPE	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	10X
4	2GN□(K)	0.7	0.8	1.2	1.4	1.8	2.4	3.0	3.6	4.2	4.6	5.4	6.4	7.5	8.6	10	10	10	10	10	10	10	10	—
6	2GN□(K)	0.9	1.0	1.5	1.8	2.3	3.0	3.8	4.5	5.4	5.6	7.0	8.3	10	11	14	16	19	23	25	25	25	25	—
10	3GN□(K)	1.9	2.2	3.2	3.8	4.9	6.4	8	9.7	11.1	12.3	15	18	29	22	26	40	40	40	40	40	40	40	—
15	3GN□(K)	2.2	2.6	3.7	4.4	5.5	7.2	9.1	11	13	14	17	21	24	29	34	41	47	50	50	50	50	50	—
25	4GN□(K)	3.7	4.4	6.1	7.3	9.1	12	15	18	22	23	28	34	44	49	61	67	79	80	80	80	80	80	—
40	5GN□(K)	6.0	7.3	10	12	15	20	25	30	36	38	47	56	68	75	94	100	100	100	100	100	100	100	—
60	5GN□(K)	9.0	11	15	18	23	30	37	45	54	56	69	83	100	111	139	150	150	150	150	150	150	150	—
90	5GN□(K)	13	15	21	26	32	40	50	60	72	74	93	111	134	148	185	200	200	200	200	200	200	200	—