

Jan 06, 2026




Product data sheet

HDC3811M7

Characteristics

Contactor, HDC3-3811, 220/230 V, 50/60 Hz

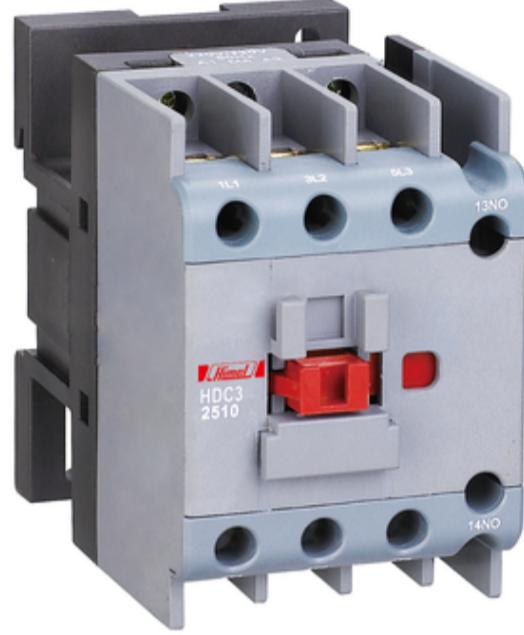

Main

Range of product	HDC3
Product or component type	Contactor
Contactor application	Non-reversing
Poles description	3P
[Ith] conventional free air thermal current	50 A

Complementary

Utilisation category	AC-3 AC-4
[In] rated current	38 A
[Uc] control circuit voltage	220/230 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Ui] rated insulation voltage	690 V
[Ie] rated operational current	38 A at 380/400 V AC-3 22 A at 660/690 V AC-3 14 A at 380/400 V AC-4 8.9 A at 660/690 V AC-4
Motor power kW	18.5 kW at 380/400 V AC-3 18.5 kW at 660/690 V AC-3 7.5 kW at 380/400 V AC-4 7.5 kW at 660/690 V AC-4

Environment

Installation category	III
Pollution degree	3
Ambient air temperature for operation	-5...40 °C
Average ambient air temperature for operation	= 35 °C (average over 24 hours)
Ambient air temperature for storage	-25...55 °C
Operating altitude	2000 m
Standards	IEC 60947-4-1
Product certifications	CB CE SEMKO
IP degree of protection	IP20
Relative humidity	0...50 % at 0...40 °C 0...90 % at 0...20 °C

Packing Units

www.famcocorp.com
E-mail: info@famcocorp.com
@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹
Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۱۳ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالیشگاه نفت پارس، پلاک ۱۲

Unit Type of Package 1	PCE
Number of Units in Package 1	1