



# Einhell

**FAMCO**  
هایپر صنعت

**BLUE**

## BT-PG 850/3 Power Generator

### Features

- 230 V socket for easy power supply (1)
- Overload switch for appliance safety (2)
- Reversing starter to start the machine (3)
- Sturdy feet (4)
- Carrying handle for easy transport (5)
- Powerful 2-stroke engine, air-cooled
- Synchronous generator
- Large 4.2 liter tank for a continuous operation
- Full crank shaft
- Automatic voltage regulation


### Technical Data

- Generator: Synchronous
- Continuous power: 650 W
- Maximum power: 720 W (S2 2 min)
- Rated voltage: 230 V ~
- Rated current: 2.8 A ~
- Frequency: 50 Hz
- Type: 1 cylinder; 2-stroke air-cooled
- Cylinder capacity: 63 cm<sup>3</sup>
- Max. Power: **1.2 kW / 1.65 HP**
- Fuel: Mixture 1:40 (Oil:Petrol)
- Tank capacity: 4.2 l
- Consumption at 2/3 load: approx. 0.7 l/h
- Protection type: IP 23 M
- Product weight: 16.4 kg

### Logistic Data

- Net weight: 16.5 kg
- Gross weight: 18.2 kg
- Packing dimensions: 405 x 365 x 350 mm
- Bar code: 4006825 579352
- Sales unit: 1 pc



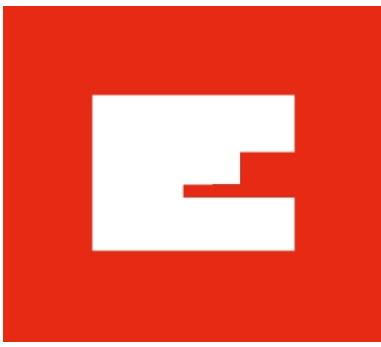

# Einhell

FAMCO  
هایپر صنعت

RED


## RT-PG 250u Power Generator

**Tank capacity 15 l**

This "power station" supplies energy and provides security. Power will be available whenever it is needed. Power failures or insufficient current supply are no longer a problem; whether during camping, at building sites, in homes or cottages, on boats or in the garden. This equipment can be used nearly everywhere, and, with its continuous power supply of 2,000 watts, provides sufficient power for many applications. The large 15-litre tank ensures continuous operation for eleven hours at 2/3 load. The power generator is powered by a high-quality 4-stroke engine and is equipped with an overload switch. Furthermore, the automatic voltage regulation cares for a constant voltage.



**Power: 4.77 kW / 6.5 HP**



### Features

- Powerful 4-stroke drive motor
- Large 15-litre tank for continuous power
- Oil deficiency safety device to protect the motor
- Overload switch for equipment reliability
- 2x 230 V socket for simple current drain
- Ignition key switch
- Practical voltmeter
- Convenient fuel gauge
- Linkage to start the motor
- Automatic voltage regulation
- Full crank shaft

www.famcocorp.com

E-mail: info@famcocorp.com

@famco\_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشکری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲



# CinHELL

FAMCO  
هایپر صنعت

RED

## RT-PG 2500 Power Generator

Large 15-litre tank for continuous power made of metal

Convenient fuel gauge

Air filter

Fuel tap

Linkage to start the motor



2x 230 V socket for simple current drain


Ignition key switch

Oil deficiency protection

CE



Overload switch for equipment reliability



Practical voltmeter

### Logistic Information

**Type:** RT-PG 2500  
**Art.-No.:** 41.523.06  
**Ident-No.:** 01018  
**Bar code:** 4006825 547207  
**Packaging:** 615 x 515 x 520 mm

**Sales unit:** 1 pc  
**20'':** 160 pcs  
**40'':** 336 pcs  
**40'' HC:** 410 pcs  
**Net weight:** 40.8 kg  
**Gross weight:** 45.0 kg

### Technical Data

- Generator: Synchronous
- Continuous Power: 2,000 W
- Max. Power: 2,200 W (S2 5 min)
- Voltage: 2 x 230 V / 1 ~
- Nominal current: 8.7 A / 1 ~
- Frequency: 50 Hz
- Type: 1 cylinder, 4-stroke air-cooled
- Cylinder capacity: 196 cm<sup>3</sup>
- Max. Motor power: 4.77 kW / 6,5 HP
- Fuel: Normal lead-free
- Tank capacity: 15 litres
- Running time at 2/3 load: approx. 11 hours
- Noise level L<sub>wa</sub>: 94 dB (A)



# Einhell

**FAMCO**  
هایپر صنعت

**BLUE**

## BT-PG 2000/3 Power Generator

This "power station" supplies energy and provides security.

Power will be available whenever it is needed. Power failures or insufficient current supply are no longer a problem; whether during camping, at building sites, in homes or cottages, on boats or in the garden. This equipment can be used nearly everywhere, and, with its continuous power supply of 2,000 watts provides sufficient power for many applications. The large 13-litre tank ensures continuous operation for 11 hours at 2/3 load. The power generator is powered by a high-quality 4-stroke engine and is equipped with an overload switch.

### Features


- Large 13-litre tank for continuous power (1)
- Convenient fuel gauge (2)
- 2 x 230 V socket for simple current drain (3)
- Overload switch for equipment reliability (4)
- Practical voltmeter (5)
- Powerful 4-stroke drive motor (6)
- Linkage to start the motor (7)
- Oil deficiency safety device to protect the motor
- Full crank shaft
- Automatic voltage regulation

### Technical Data

■ Generator:	Synchronous
■ Continuous Power (S1):	1 x 2,000 W
■ Max. Power (S2 2 min):	1 x 2,200 W
■ Nominal current:	2 x 230 V ~
■ Frequency:	50 Hz
■ Type:	1 cylinder, 4-stroke air cooled
■ Cylinder capacity:	196 cm <sup>3</sup>
■ Max. motor power:	4 kW / 5.4 HP
■ Fuel:	Petrol
■ Tank capacity:	13 l
■ Running time at 2/3 load:	approx. 11 hours
■ Noise level:	95 dB (A)
■ Product weight:	36.4 kg

### Logistic Data

■ Net weight:	36.5 kg
■ Gross weight:	39.7 kg
■ Packing dimensions:	620 x 470 x 475 mm
■ Bar code:	4006825 575606
■ Sales unit:	1 pc





# Einhell


FAMCO  
هایپر صنعت

RED

## RT-PG 3250 Power Generator


**Tank capacity 15 l**

This "power station" supplies energy and provides security. Power will be available whenever it is needed. Power failures or insufficient current supply are no longer a problem; whether during camping, at building sites, in homes or cottages, on boats or in the garden. This equipment can be used nearly everywhere, and, with its continuous power supply of 2,600 watts, provides sufficient power for many applications. The large 15-litre tank ensures continuous operation for eight hours at 2/3 load. The power generator is powered by a high-quality 4-stroke engine and is equipped with an overload switch.



230 V

230 V



**Power: 5,1 kW / 7 HP**

### Features

- Powerful 4-stroke drive motor
- Large 15-litre tank for continuous power
- Convenient fuel gauge
- Oil deficiency safety device to protect the motor
- Overload switch for equipment reliability
- 2x 230 V sockets for simple current drain
- Ignition key switch
- Practical voltmeter
- Linkage to start the motor
- Automatic voltage regulation
- Wheels and push brackets for easy transport
- Full crank shaft

www.famcocorp.com

E-mail: info@famcocorp.com

@famco\_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲



# Einhell

FAMCO  
هایپر صنعت

RED

## RT-PG 3250 Power Generator



Large 15-litre tank for continuous power

Convenient fuel gauge

Air filter

Fuel tap

Linkage to start the motor

Ignition key switch

2x 230 V sockets for simple current drain

Over load switch for equipment reliability

Practical voltmeter

Wheels and push brackets for easy transport



### Logistic Information

### Technical Data

<b>Type:</b>	<b>RT-PG 3250</b>	■ Generator:	Synchronous
<b>Art.-No.:</b>	41.523.24	■ Continuous Power:	2,600 W
<b>Ident-No.:</b>	01017	■ Max. Power:	2,800 W (S2 5 min)
<b>Bar code:</b>	4006825 541120	■ Voltage:	2 x 230 V / 1 ~
<b>Packaging:</b>	615 x 515 x 520 mm	■ Nominal current:	11.3 A / 1 ~
		■ Frequency:	50 Hz
<b>Sales unit:</b>	1 pc	■ Type:	1 cylinder, 4-stroke air-cooled
<b>20'':</b>	160 pcs	■ Cylinder capacity:	208 cm <sup>3</sup>
<b>40'':</b>	336 pcs	■ Max. Motor power:	<b>5.1 kW / 7 HP</b>
<b>40'' HC:</b>	410 pcs	■ Fuel:	Normal lead-free
<b>Net weight:</b>	45.0 kg	■ Tank capacity:	15 litres
<b>Gross weight:</b>	51.0 kg	■ Running time at 2/3 load:	approx. 8 hours
		■ Noise level L <sub>wa</sub> :	95 dB (A)

www.famcocorp.com

E-mail: info@famcocorp.com

@famco\_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشکری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲



# Einhell

**FAMCO**  
هایپر صنعت

**BLUE**

**BT-PG 3100/1**

The powerful BT-PG 3100/1 petrol generator ensures that power is available reliably and permanently in remote places and during a mains power failure. Light sources and other electrical devices can be easily operated from two 230V socket outlets. With a continuous output of 2600 W, the combination of synchronous generator and long-lasting four-stroke engine supplies plenty of power for a wide range of applications.

## Features

- Smooth-running and long-lasting 4-stroke engine
- Crank shaft mounted at two ends
- Low oil cut-out to protect against engine damage
- Reversing starter
- Synchronous generator
- AVR function: Stable output power for electronically consumers
- 2 x 230 V socket
- Voltmeter
- Overload switch for appliance safety
- Large 15 liter tank with level indicator
- Sturdy wheels, hinged handle and carry-frame for easy transport
- Sturdy feet



## Technical Data

- Type of generator	Synchronous
- Frequency	50 Hz
- Continuous power (S1) at 230 V	2600 W
- Max. power (S2   S2time) at 230 V	3100 W   2 min
- Nominal current at 230 V	11.3 A
- 230 V socket	2 Pieces
- Engine	four-stroke, air cooled
- Number of cylinders	1 Pieces
- Engine displacement	208 cm <sup>3</sup>
- Engine speed	3000 min <sup>-1</sup>
- Max. engine power	4.1 kW
- Fuel	Petrol
- Capacity of fuel tank	15 L
- Running time with 2/3 load	11 h
- Sound power level LWA	96 dB (A)



## Logistic Data

- Product weight	42.35 kg
- Gross weight single packaging	45.5 kg
- Dimensions single packaging	610 x 450 x 470 mm
- Pieces per export carton	1 Pieces
- Gross weight export carton	45.5 kg
- Dimensions export carton	625 x 460 x 460 mm
- Container quantity (20"/40"/40"HC)	225   475   475



[www.famcocorp.com](http://www.famcocorp.com)

E-mail: [info@famcocorp.com](mailto:info@famcocorp.com)

@famco\_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲



# Einhell

**FAMCO**  
هایپر صنعت

**RED**

## RT-PG 5500/1 D Power Generator

### *Tank capacity 25 l*

This "power station" supplies energy and provides security. Power will be available whenever it is needed. Power failures or insufficient current supply are no longer a problem; whether during camping, at building sites, in homes or cottages, on boats or in the garden. This equipment can be used nearly everywhere, and, with its maximum power supply of 5,500 watts, provides sufficient power for many applications. The large 25-litre metal tank ensures continuous operation for 9.5 hours at 2/3 load. The power generator is powered by a high-quality 4-stroke engine and is equipped with an overload switch. The automatic voltage regulation adjusts the motor power according to the decreased power and acquires the voltage to estimated standard again.



230 V

230 V

400 V

**Power: max. 5500 W**

### Features

- Automatic voltage regulation
- Powerful 4-stroke drive motor
- Large 25-litre tank for continuous power with fuel gauge
- Oil deficiency safety device to protect the motor
- Overload switch for equipment reliability
- Changeover switch 230 / 400 V
- Ignition key switch with two keys
- Linkage to start the motor
- High grade wheels and folding handle for easy transport
- Stable base foot
- Full crank shaft







# Einhell

FAMCO  
هایپر صنعت

RED

## RT-PG 5500/1 D

### Power Generator



#### Logistic Information

Type:	RT-PG 5500/1 D
Art.-No.:	41.523.34
Ident-No.:	01019
Bar code:	4006825 568271
Packaging:	715 x 595 x 620 mm
Sales unit:	1 pc
20'':	81 pcs
40'':	180 pcs
40'' HC:	-- pcs
Net weight:	81.9 kg
Gross weight:	86.5 kg

#### Technical Data

Generator:	Synchronous
Max. Power:	5,500 W at 400 V socket
or:	3,300 W at 230 V sockets
Continuous Power:	3,600 W at 400 V socket
or:	3,000 W at 230 V sockets
Voltage:	2 x 230 V / 1 ~ / 1 x 400 V / 3 ~
Frequency:	50 Hz
Type:	1 cylinder, 4-stroke air-cooled
Cylinder capacity:	390 cm <sup>3</sup>
Max. motor power:	9.55 kW / 13 HP
Fuel:	Petrol lead-free
Tank capacity:	25 l