



Totally Focused. Totally Independent.

Technical Guide

ECP28 4 A



The world's largest
independent producer of
alternators 1 – 5,000kVA

Standards

Alternators are designed and produced within an ISO 9001 environment. The entire series is manufactured according to, and complies with, the most common specifications such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, NF 51.111, CAN/CSA-C22.2 No14-95-No100-95, NEMA MG 1-2011, ISO 8528-3. Other standards such as UL1446, UL 1004/4 and /B are available on request.

Windings and Performances

All windings are 2/3rds pitch to eliminate triplen harmonics within the voltage waveform and to avoid excessive neutral currents in certain parallel operating conditions. A fully interconnected aluminium or copper damper cage is supplied on the rotor of all models (excluding the ECP3 series).


- ▶ 12 wire reconnectable:
50Hz – 380V to 440V and 220/110V to 240/120V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220/110V to 240/120V (de-rates may apply at certain voltages)
- ▶ 6 wire reconnectable:
50Hz – 380V to 440V and 220V to 240V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220V to 240V (de-rates may apply at certain voltages)

Winding Configurations	Standard		Special (dedicated)			
	12 wire Reconnectable	6 wire Reconnectable	380V and 600V 60Hz	690V 50/60Hz	220-240V 1ph 50Hz	220-240V 1ph 60Hz
ECP3 to ECO38	Std	Option	Option	Option	Option	Option
ECO40 to ECO46	Std	Option	Option	Option	Option (to ECO40)	Option (to ECO40)
Insulation materials	Class H	Class H	Class H	Class H	Class H	Class H
High efficiency	Std	Std	Std	Std	Std	Std
High motor starting	>300%	>300%	>300%	>300%	>300%	>300%
THD (Total Harmonic Distortion)	Typically <3.5% full load L-L	Typically <3.0% full load L-L	Typically <3.5% full load L-L	Typically <3.5% full load L-L	Typically <4.5% full load L-N	Typically <4.5% full load L-N
Interference suppression	VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request					

Winding Protection

There are various degrees of protection for the windings following the standard impregnation process, as can be seen here. The TOTAL+ butadienic black flexible coating is recommended for arduous applications.

Winding Protection:	STANDARD	STANDARD+	GREY	GREY+	TOTAL+ (3% de-rate may apply on certain models)
ECP3	Std	Option	Option	Option	Option
ECP28,NPE32 and ECP32	-	Std	Option	Option	Option
ECP34 to ECO46	-	-	Std	Option	Option

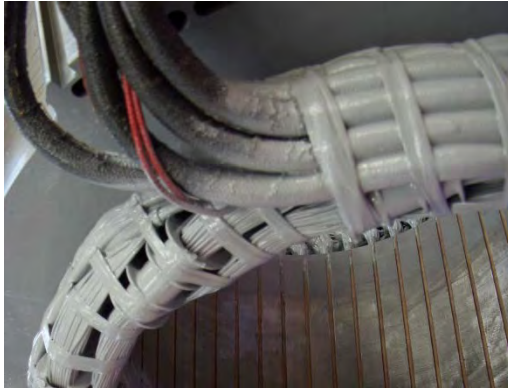

Grey treatment (marinization) on the left, TOTAL+ treatment shown on the right. The EG43 grey varnish, is an high temperature insulating enamel that forms a tough and flexible film, with excellent moisture and chemical protection. It is water and oil proof, and also protects windings from abrasion. It is applied spraying an over coating layer over the impregnated winding, or dipping the stator in a varnish barrel for superior treatments

The TOTAL+ is a protection system that makes Mecc Alte special. It is the ultimate winding treatment that offers truly superior performances when the environment is really harsh, or the application very demanding. It is a rubbery protection treatment, used to replace epoxies and silicones winding encapsulation. The TOTAL+ flexible black compound cures to a tough, resilient, glossy black thick coating that seals the copper against moisture and chemical attacks. Due to its encapsulation capability and flexibility, is also extremely resistant to the particle abrasion as it adsorbs the impacts. Moreover, the high flexibility leads to a long-trouble less life protection, as the compound follows elastically the thermal expansion cycles of the windings from the cold to the hot condition and vice versa without forming any cracks.

Protection for Environment

In addition to protection on the windings themselves, the alternators can have increased ingress protection. Standard levels are IP23 with further upgrades available to include inlet filters, IP43 and IP45: 7% de-rates apply on inlet filters and IP43 protection. 20-30% de-rates apply for IP45 depending on alternator model.

Additional air exit louvres (called IP23+) are optionably retrofittable in the overall ECP32 to ECO 46 range, in order to comply to the most strict marine regulations.




Construction

The robust mechanical structure withstands up to 5G in any direction and 9G vertically and its design permits easy access to the connections and components during routine maintenance check-ups. The mechanical design has used the most advanced FEM techniques. The materials used are: FEPI2 steel for the frame, C45 steel for the shaft and cast iron or aluminum pressure die cast for the end-brackets: fans are aluminum die casted either nylon fiber glass loaded, UL compliant materials. Rotors are dynamically balanced according grade 2.5 of ISO 1940-1.

Terminals and Terminal Box

Easy access to regulators is assured through a pull out drawer or a drop down panel to allow safer adjustment. Large terminal boxes allow easy access of power cables, in the ECO43 and ECO46 higher power ranges the terminal allow the convenient choice of power cable or busbar connection with versatility of entry and connection. Current transformers are available as an option on series ECO 40, 43 and 46 with single or dual output.

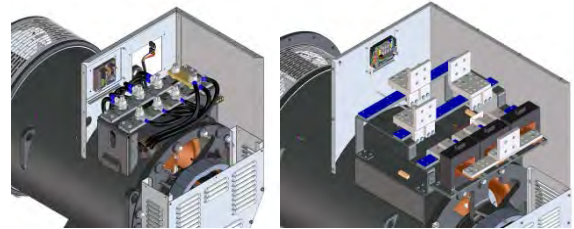

Excitation and Regulation Systems

All ECP/ECO series have MAUX auxiliary winding to power the digital regulator. Both DSR and the DER1 are available to connect to PC through the DxR2 USB interface and DxR TERMINAL software to interrogate/download alarms & settings for analysis or for cloning other regulators. DER2 has got an integrated USB connection and can be connected to the PC without any optional connection boards. More settings such as LAMS, digital RAM based synchronous external control and soft start are obtainable through the DxR connection. Simple analogue potentiometers are available for the more usual adjustments.


Excitation Systems	DSR	DER1	DER2
ECP3 to ECO38	Std	Option	Option
ECO40 to ECO46	-	Std	Option
Parallel Operation	√	√	√
Mains Parallel	√	√	√
3 Phase Sensing (rms)	-	√	√
Accuracy	+/-1%	+/-0.5%	+/-0.5%
Remote Voltage Control	√	√	√
Alarm Log	√	√	√
Analogue and Digital Configurable	√	√	√
LAMS (Load Acceptance V/f)	√	√	√
APO (Active Protection Output)	√	√	√
Soft Start	√	√	√
High dynamic response	-	-	√
USB connection without external boards	-	-	√

For a given motor start duty a smaller machine may be selected – also enhanced by low sub-transient reactance values for non-linear loads. The whole range from 6.5 to 3400kVA is capable of >300% sustained short circuit current for up to 20 seconds.

Optional PMG3

PMG3 can be retro fit or factory fit on ECO 40, 43 and 46 series. This smart MeccAlte design allows an easy fix kit, through a tapered cone coupling and a simple replacement of the rear air louvre. PMG3 is also available on ECO 38, when ordered from the factory.

The complete AVR range is fully compatible with both MAUX and PMG3 systems, this minimises spare part management and flexibility of stock as one AVR suits all applications. The PMG3 is delivering the same amount of kVA available with the MAUX.



Accessories

Additional optionals can be fit on our alternator series, such as PTC thermistors or PT100 both on windings and bearings, space heaters, high and low profile of terminal boxes (on most series), air filter clogging sensors, rotating diode bridge failure sensor (RBD), power factor controller for parallel operation (PFR/2), parallel devices (standard from ECO 40), air filters, IP43 and IP45 protections, marine IP23 + protection for SOLAS requirements and many others.

Deration coefficients

Altitude (meters)	Ambient temperature (Celsius)					
	25	40	45	50	55	60
≤ 1000	1.07	1	0.96	0.93	0.91	0.89
$> 1000 \leq 1500$	1.01	0.96	0.92	0.89	0.87	0.84
$> 1500 \leq 2000$	0.96	0.91	0.87	0.84	0.83	0.79
$> 2000 \leq 3000$	0.9	0.85	0.81	0.78	0.76	0.73

Notes on short circuit curves

The indicated coefficients have to be used to correct the three phase short circuit curves values as a function of the rated voltage.

The indicated coefficient have to be used to correct the three phase short circuit curves values as a function of the type of short circuit voltage.

50 Hz		60 Hz	
Voltage	Factor	Voltage	Factor
380	0.93X	415	0.85X
400	1X	440	0.90X
415	1.04X	460	0.95X
440	1.10X	480	1X

	3 phase	2 phase L-L	1 phase L-N
<i>Instantaneous</i>	1X	0.87X	1.30X
<i>Minimum</i>	1X	1.80X	3.20X
<i>Sustained</i>	1X	1.50X	2.50X
<i>Max Duration</i>	20 sec.	10 sec.	4 sec.

All the curves are shown for series or parallel star connection at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to parallel star, the additional coefficient is 2X. From series star to series delta, it is 1.72X. From series star to parallel delta, it is 3.44X.

General characteristics

Pole number	4	Insulation class	H
Phase number	3	Protection class	IP23
Number of wires	12	NDE Bearing type	6207-2RS
Execution	Brushless	DE Bearing type	6309-2RS
Regulator type	DSR	Maximum Overspeed	2250
Winding pitch	2/3	Altitude	0-1000
Code voltage reference	T0405S3	Balancing	ISO1940-1

Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																					
STANDBY-163/27					STANDBY-150/40				H-125/40				F-105/40				B-80/40				
Series	Star Y	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
Parallel	Star YY	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V
Series	Delta Δ	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V
Parallel	Delta ΔΔ	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V
ECP28 1VS4 A	kVA	8,4	8,4	8,4	-	8	8	8	-	7,8	7,8	7,8	-	7	7	7	-	6,2	6,2	6,2	-
	kW	6,7	6,7	6,7	-	6,4	6,4	6,4	-	6,2	6,2	6,2	-	5,6	5,6	5,6	-	5	5	5	-
ECP28 2VS4 A	kVA	11,7	11,7	11,7	-	11,3	11,3	11,3	-	11	11	11	-	10	10	10	-	8,8	8,8	8,8	-
	kW	9,4	9,4	9,4	-	9	9	9	-	8,8	8,8	8,8	-	8	8	8	-	7	7	7	-
ECP28 0S4 A	kVA	14,6	14,6	14,6	-	14	14	14	-	13,5	13,5	13,5	-	12,5	12,5	12,5	-	10,8	10,8	10,8	-
	kW	11,7	11,7	11,7	-	11,2	11,2	11,2	-	10,8	10,8	10,8	-	10	10	10	-	8,6	8,6	8,6	-
ECP28 S4 A	kVA	18	18	18	16,4	17,5	17,5	17,5	16	17	17	17	15,5	16	16	16	14,5	13,6	13,6	13,6	12,4
	kW	14,4	14,4	14,4	13,1	14	14	14	12,8	13,6	13,6	13,6	12,4	12,8	12,8	12,8	11,6	10,9	10,9	10,9	9,9
ECP28 M4 A	kVA	21,5	21,5	21,5	19,4	20,5	20,5	20,5	18,5	20	20	20	18	18,5	18,5	18,5	17	16	16	16	14,4
	kW	17,2	17,2	17,2	15,5	16,4	16,4	16,4	14,8	16	16	16	14,4	14,8	14,8	14,8	13,6	12,8	12,8	12,8	11,5
ECP28 2L4 A	kVA	26,5	26,5	26,5	-	25,5	25,5	25,5	-	25	25	25	-	23	23	23	-	20	20	20	-
	kW	21,2	21,2	21,2	-	20,4	20,4	20,4	-	20	20	20	-	18,4	18,4	18,4	-	16	16	16	-
ECP28 VL4 A	kVA	32,5	32,5	32,5	-	30,5	30,5	30,5	-	30	30	30	-	26	26	26	-	24	24	24	-
	kW	26	26	26	-	24,4	24,4	24,4	-	24	24	24	-	20,8	20,8	20,8	-	19,2	19,2	19,2	-

Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																						
		STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40				
	Series	Star Y	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V
	Parallel	Star YY	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V
	Series	Delta Δ	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V
	Parallel	Delta ΔΔ	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V
ECP28 1VS4 A	kVA	8,8	9,4	10	10	8,6	9	9,7	9,7	8,3	8,8	9,4	9,4	7,5	7,8	8,5	8,5	6,6	7	7,5	7,5	
	kW	7	7,5	8	8	6,9	7,2	7,8	7,8	6,6	7,0	7,5	7,5	6	6,2	6,8	6,8	5,3	5,6	6	6	
ECP28 2VS4 A	kVA	12,2	13,1	14	14	11,8	12,8	13,6	13,6	11,5	12,4	13,2	13,2	10,5	11	12	12	9,2	9,9	10,6	10,6	
	kW	9,8	10,5	11,2	11,2	9,4	10,2	10,9	10,9	9,2	9,9	10,6	10,6	8,4	8,8	9,6	9,6	7,4	7,9	8,5	8,5	
ECP28 0S4 A	kVA	15,1	16,2	17,5	17,5	14,4	15,5	16,7	16,7	14	15	16,2	16,2	13	13,5	15	15	11,2	12	13	13	
	kW	12,1	13	14	14	11,5	12,4	13,4	13,4	11,2	12	13	13	10,4	10,8	12	12	9	9,6	10,4	10,4	
ECP28 S4 A	kVA	18,5	19,7	21,6	21,6	18	19,1	21	21	17,5	18,6	20,4	20,4	16,5	17,5	19	19	14	15	16,3	16,3	
	kW	14,8	15,8	17,3	17,3	14,4	15,3	16,8	16,8	14	14,9	16,3	16,3	13,2	14	15,2	15,2	11,2	12	13	13	
ECP28 M4 A	kVA	22,5	25	25,8	25,8	21,5	23,6	24,6	24,6	21	23	24	24	19	20	22	22	16,8	18,4	19,2	19,2	
	kW	18	20	20,6	20,6	17,2	18,9	19,7	19,7	16,8	18,4	19,2	19,2	15,2	16	17,6	17,6	13,4	14,7	15,4	15,4	
ECP28 2L4 A	kVA	27,5	29	31,8	31,8	26,5	28	30,6	30,6	26	27,5	30	30	24	25,5	27,5	27,5	20,8	22	24	24	
	kW	22	23,2	25,4	25,4	21,2	22,4	24,5	24,5	20,8	22	24	24	19,2	20,4	22	22	16,6	17,6	19,2	19,2	
ECP28 VL4 A	kVA	35,2	38,4	38,4	38,4	33,5	36,6	36,6	36,6	33	36	36	36	29	32	32	32	26,4	28,8	29	29	
	kW	28,2	30,7	30,7	30,7	26,8	29,3	29,3	29,3	26,4	28,8	28,8	28,8	23,2	25,6	25,6	25,6	21,1	23	23,2	23,2	

Reactance & Time constants- Class H / 400V

Unsaturated (ref. EN60034-4)			ECP28 1VS4 A	ECP28 2VS4 A	ECP28 0S4 A	ECP28 S4 A	ECP28 M4 A	ECP28 2L4 A	ECP28 VL4 A
X_d	Direct-axis synchronous reactance	%	207	199,9	188,6	200,9	184,5	189,6	169,1
X'_d	Direct-axis transient reactance	%	17,9	17,5	16,6	17,3	17,22	16,6	15,79
X''_d	Direct-axis subtransient reactance	%	12,8	12,5	10,7	11,8	9,84	9,43	9,02
X_q	Quadrature-axis synchronous reactance	%	75,8	72,8	64,6	73,8	80	77,9	72,8
X'_q	Quadrature-axis transient reactance	%	75,8	72,8	64,6	73,8	80	77,9	72,8
X''_q	Quadrature-axis subtransient reactance	%	26,6	24,6	22,5	24,6	22,6	21,5	19,5
X₂	Negative-sequence reactance	%	16,9	15,9	14,4	17,4	14,8	14	13,5
X₀	Zero sequence reactance	%	3,9	3,59	3,18	3,69	3,38	3,2	2,87
Saturated									
X_d	Direct-axis synchronous reactance	%	176	169,9	160,3	170,7	156,8	161,2	143,8
X'_d	Direct-axis transient reactance	%	15,2	14,9	14,1	14,7	14,64	14,1	13,42
X''_d	Direct-axis subtransient reactance	%	10,9	10,6	9,06	10	8,36	8,01	7,67
X_q	Quadrature-axis synchronous reactance	%	64,5	61,8	54,9	62,7	68	66,2	61,9
X'_q	Quadrature-axis transient reactance	%	64,5	61,8	54,9	62,7	68	66,2	61,9
X''_q	Quadrature-axis subtransient reactance	%	22,6	20,9	19,2	20,9	19,2	18,3	16,6
X₂	Negative-sequence reactance	%	14,4	13,5	12,3	14,8	12,5	11,9	11,5
X₀	Zero sequence reactance	%	3,9	3,59	3,18	3,69	3,38	3,2	2,87
K_{cc}	Short circuit ratio		0,68	0,62	0,6	0,67	0,64	0,58	0,62
T'_d	Transient time constant	sec	0,055	0,05	0,06	0,051	0,044	0,047	0,046
T''_d	Subtransient time constant	sec	0,02	0,022	0,025	0,018	0,014	0,013	0,012
T'_{do}	Open circuit time constant	sec	0,95	0,91	0,98	0,9	0,85	0,93	0,93
T_a	Armature time constant	sec	0,015	0,018	0,019	0,016	0,012	0,011	0,011

Additional information - Class H / 400V

I_o	Excitation current at no load	A	0,6	0,7	0,7	0,5	0,5	0,6	0,6
I_c	Excitation current at full load	A	2,5	2,4	2,7	1,7	1,5	1,6	2,0
Overload			1 hour in a 6 hours period 110% rated load						
Overload per 20 sec.		%	300						
Heat dissipation		W	1033	1409	1671	1996	2307	2779	3242
Telephone Harmonic Factor - THF		%	<2	<2	<2	<2	<2	<2	<2
Waveform Distors.(THD) full load LL/LN		%	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	2,1 / 2
Waveform Distors.(THD) no load LL/LN		%	3,7 / 3,7	3,7 / 3,7	3,7 / 3,7	3,7 / 3,7	3,6 / 3,5	3,4 / 3,2	3,3 / 3,1

Reactance & Time constants- Class H / 480V








Unsaturated (ref. EN60034-4)			ECP28 1VS4 A	ECP28 2VS4 A	ECP28 0S4 A	ECP28 S4 A	ECP28 M4 A	ECP28 2L4 A	ECP28 VL4 A
X_d	Direct-axis synchronous reactance	%	207,9	199,9	188,6	200,9	184,5	190	169,1
X'_d	Direct-axis transient reactance	%	18	17,5	16,6	17,3	17,22	16,6	15,79
X''_d	Direct-axis subtransient reactance	%	12,9	12,5	10,7	11,8	9,84	9,43	9,02
X_q	Quadrature-axis synchronous reactance	%	76,2	72,8	64,6	73,8	80	77,9	72,8
X'_q	Quadrature-axis transient reactance	%	76,2	72,8	64,6	73,8	80	77,9	72,8
X''_q	Quadrature-axis subtransient reactance	%	26,8	24,6	22,5	24,6	22,6	21,5	19,5
X₂	Negative-sequence reactance	%	17	15,9	14,4	17,4	14,8	14	13,5
X₀	Zero sequence reactance	%	3,91	3,59	3,18	3,69	3,38	3,2	2,87
Saturated									
X_d	Direct-axis synchronous reactance	%	176,7	169,9	160,3	170,8	156,8	161,5	143,8
X'_d	Direct-axis transient reactance	%	15,3	14,9	14,1	14,7	14,64	14,1	13,42
X''_d	Direct-axis subtransient reactance	%	10,9	10,6	9,06	10	8,36	8,01	7,67
X_q	Quadrature-axis synchronous reactance	%	64,7	61,8	54,9	62,7	68	66,2	61,9
X'_q	Quadrature-axis transient reactance	%	64,7	61,8	54,9	62,7	68	66,2	61,9
X''_q	Quadrature-axis subtransient reactance	%	22,7	20,9	19,2	20,9	19,2	18,3	16,6
X₂	Negative-sequence reactance	%	14,4	13,5	12,3	14,8	12,5	11,9	11,5
X₀	Zero sequence reactance	%	3,91	3,59	3,18	3,69	3,38	3,2	2,87
K_{cc}	Short circuit ratio		0,68	0,62	0,6	0,67	0,62	0,58	0,62
T'_d	Transient time constant	sec	0,055	0,05	0,06	0,051	0,044	0,047	0,046
T''_d	Subtransient time constant	sec	0,02	0,022	0,025	0,018	0,014	0,013	0,012
T'_{do}	Open circuit time constant	sec	0,95	0,91	0,98	0,9	0,85	0,93	0,93
T_a	Armature time constant	sec	0,015	0,018	0,019	0,016	0,012	0,011	0,011

Additional information - Class H / 480V

I_o	Excitation current at no load	A	0,6	0,6	0,6	0,4	0,5	0,55	0,55
I_c	Excitation current at full load	A	2,4	2,5	2,7	1,7	1,5	1,6	1,9
Overload 1 hour in a 6 hours period 110% rated load									
Overload per 20 sec.		%	300						
Heat dissipation		W	1134	1536	1818	2079	2253	2756	3271
Telephone Interference Factor - TIF			<45	<45	<45	<45	<45	<45	<45
Waveform Distors.(THD) full load LL/LN		%	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	2,1 / 2
Waveform Distors.(THD) no load LL/LN		%	3,7 / 3,7	3,7 / 3,7	3,7 / 3,7	3,7 / 3,7	3,6 / 3,5	3,4 / 3,2	3,3 / 3,1








Efficiencies @ 50Hz

Models		380V 50Hz					400V 50Hz					415V 50Hz					440V 50Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECP28 1VS4 A	%	80,7	83,4	85,7	85,7	85,4	80,6	83,5	86,0	85,8	85,5	80,4	83,5	85,9	85,5	85,2	-	-	-	-	-
ECP28 2VS4 A	%	80,9	83,7	86,2	86,1	85,8	80,8	83,8	86,5	86,2	85,9	80,6	83,8	86,4	85,9	85,6	-	-	-	-	-
ECP28 0S4 A	%	81,6	84,3	86,6	86,5	86,2	81,5	84,4	86,9	86,6	86,3	81,3	84,4	86,8	86,3	86,0	-	-	-	-	-
ECP28 S4 A	%	83,2	85,3	87,1	87,1	86,8	83,1	85,4	87,4	87,2	86,9	82,9	85,4	87,3	86,9	86,6	82,4	85,1	87,0	86,7	86,3
ECP28 M4 A	%	83,1	85,5	87,5	87,3	87,0	83,0	85,6	87,8	87,4	87,1	82,8	85,6	87,5	87,1	86,8	82,3	85,5	87,4	86,9	86,5
ECP28 2L4 A	%	83,8	86,0	87,8	87,4	87,1	83,6	86,1	88,1	87,8	87,5	83,6	86,1	88,2	88,1	87,7	-	-	-	-	-
ECP28 VL4 A	%	84,2	86,4	88,2	87,7	87,4	84,0	86,5	88,5	88,1	87,8	84,0	86,5	88,6	88,4	88,2	-	-	-	-	-

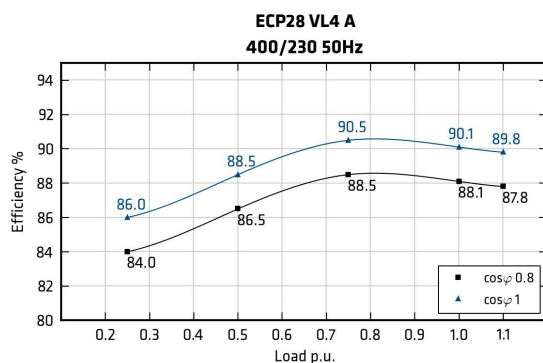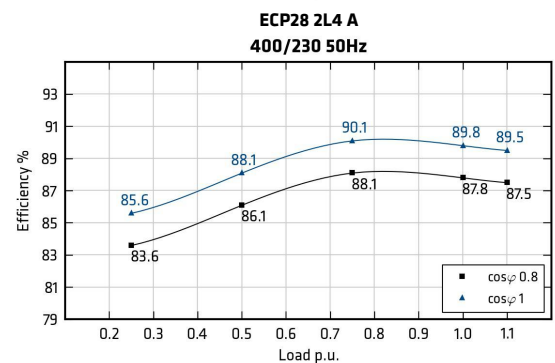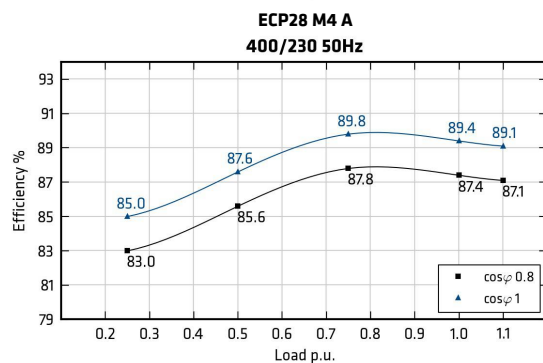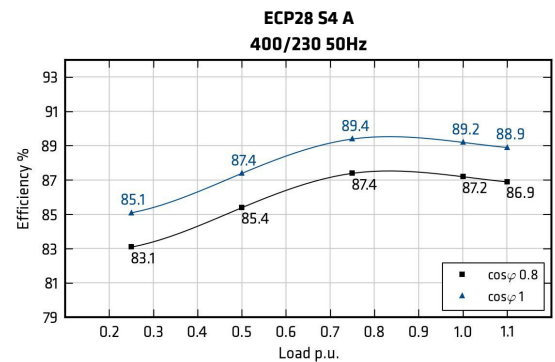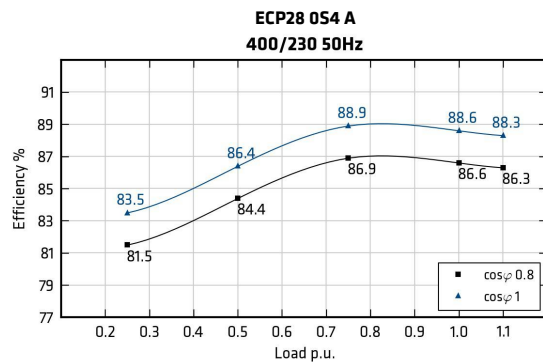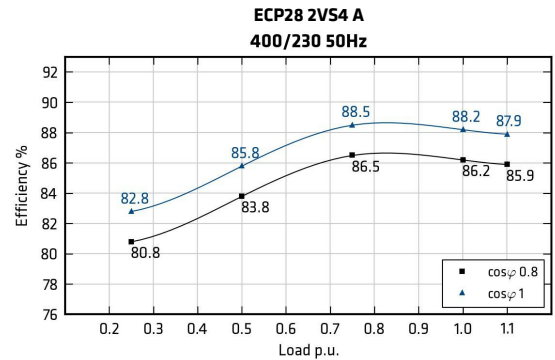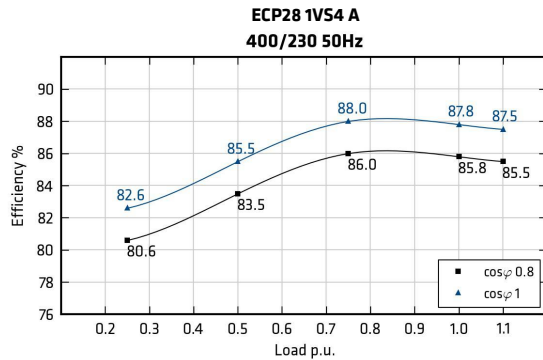


Efficiencies @ 60Hz

Models		415V 60Hz					440V 60Hz					460V 60Hz					480V 60Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECP28 1VS4 A	%	81,4	84,2	86,4	86,2	85,9	81,2	84,3	86,6	86,7	86,5	81,3	84,4	86,8	86,8	86,6	81,6	84,5	87,0	86,9	86,7
ECP28 2VS4 A	%	81,6	84,5	87,0	86,6	86,3	81,4	84,6	87,2	87,1	86,9	81,5	84,7	87,4	87,2	87,0	81,8	84,8	87,6	87,3	87,1
ECP28 0S4 A	%	82,3	85,2	87,4	87,0	86,7	82,1	85,3	87,6	87,5	87,3	82,2	85,4	87,8	87,6	87,4	82,5	85,5	88,0	87,7	87,5
ECP28 S4 A	%	83,3	85,9	88,0	88,0	87,7	83,1	86,0	88,2	88,5	88,3	83,2	86,1	88,4	88,6	88,4	83,5	86,2	88,6	88,7	88,5
ECP28 M4 A	%	85,1	87,2	88,9	88,8	88,5	85,1	87,3	89,1	89,3	89,1	85,1	87,4	89,3	89,4	89,2	85,0	87,5	89,5	89,5	89,3
ECP28 2L4 A	%	85,9	87,7	89,4	88,8	88,4	85,7	87,8	89,6	89,1	88,8	85,9	87,9	89,8	89,3	89,0	85,8	88,0	90,0	89,7	89,4
ECP28 VL4 A	%	86,1	88,1	89,7	88,9	88,5	86,1	88,2	89,9	89,2	88,8	86,0	88,3	90,1	89,4	89,1	85,9	88,4	90,3	89,8	89,5

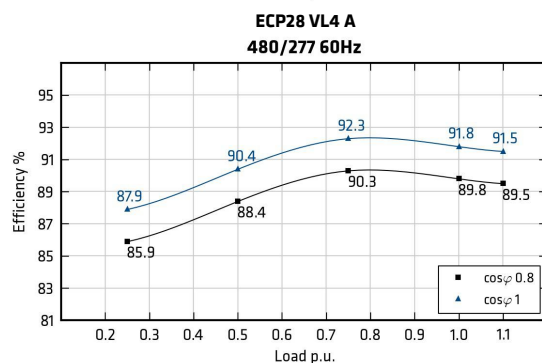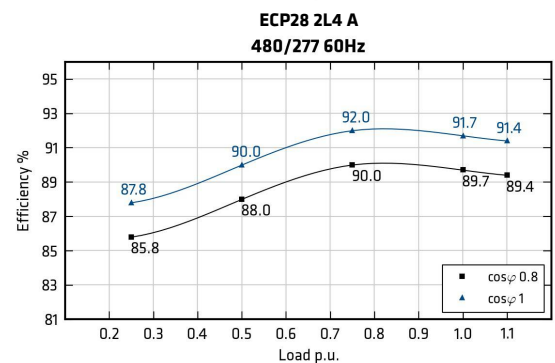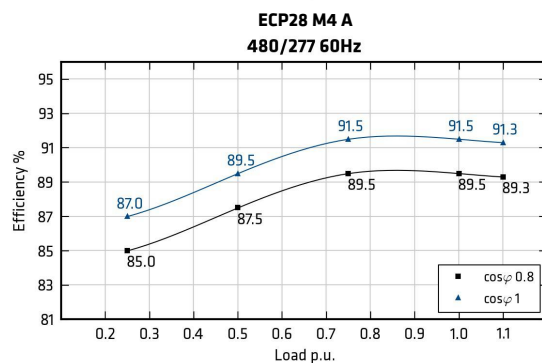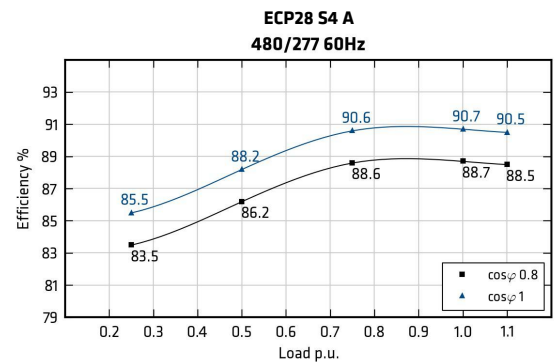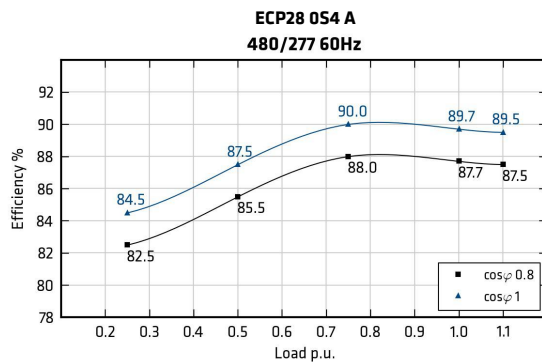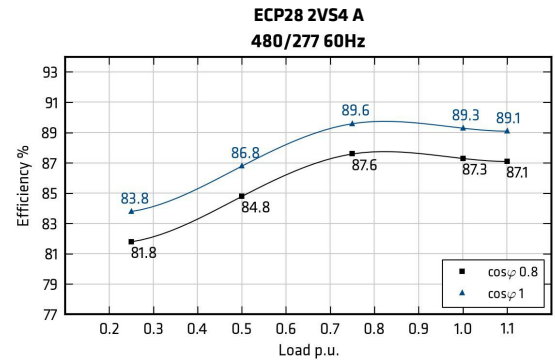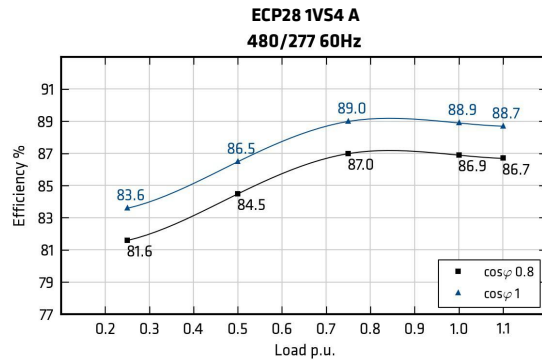

Transients voltage

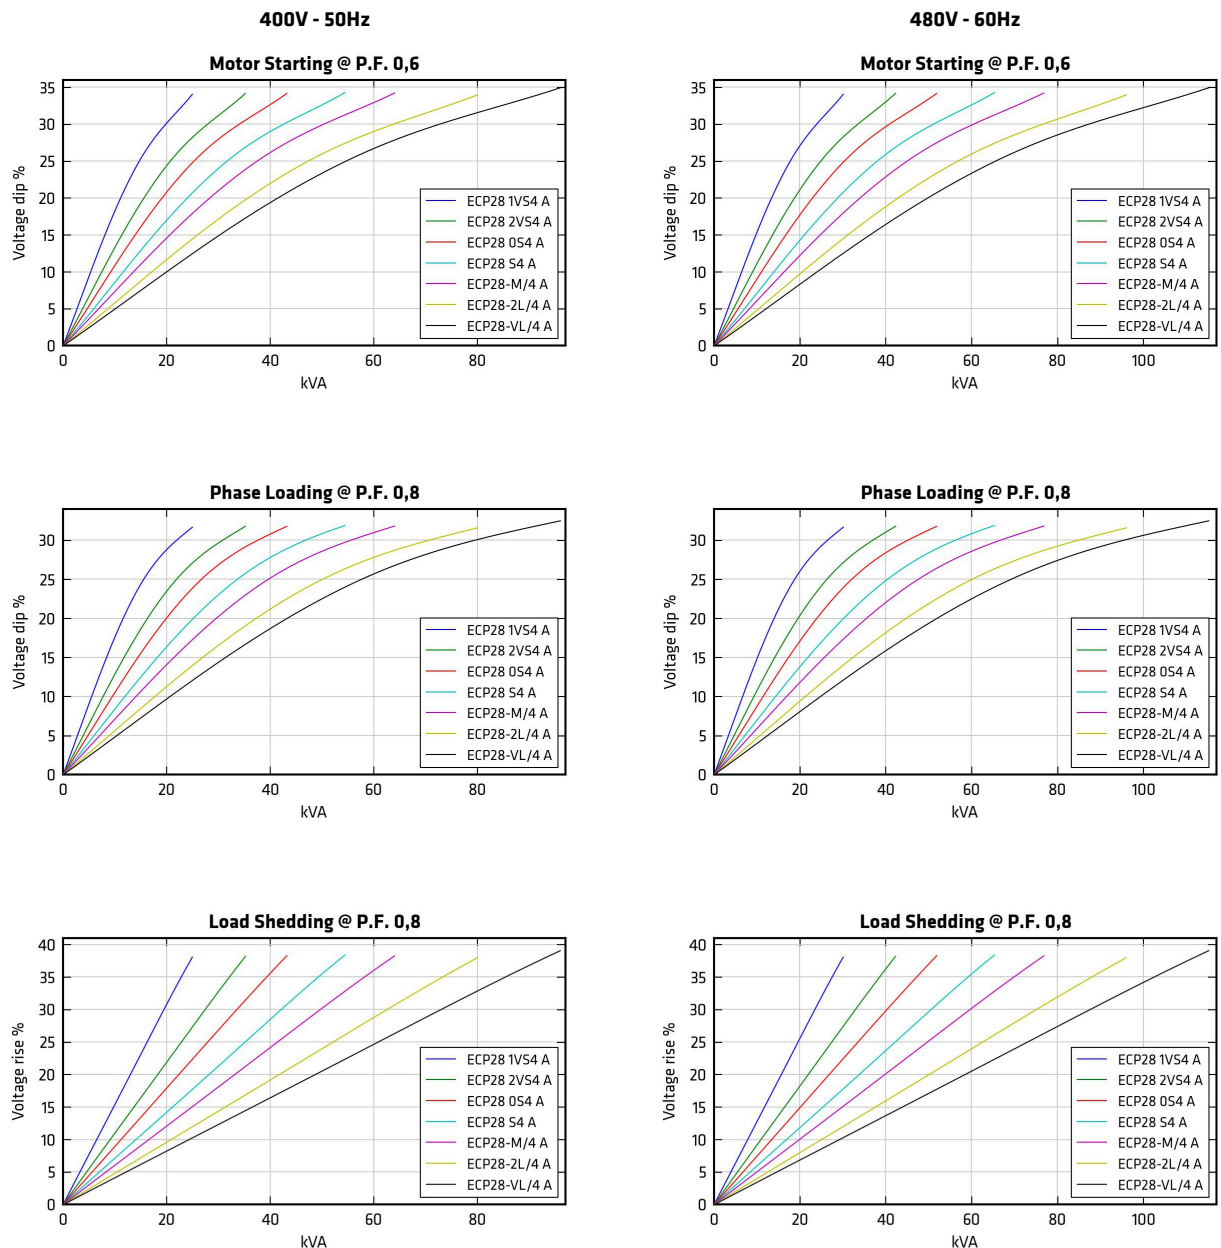

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$PFCC = \sin(\arccos(PF_{new})) / 0.8$$

Example. The PFCC at power factor 0.3 is 1.192 [$PFCC = \sin(\arccos(0.3)) / 0.8$]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value.).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):


$$VCC = (400/V_{new})^2 \text{ if } 50 \text{ Hz}; VCC = (480/V_{new})^2 \text{ if } 60 \text{ Hz}$$

Example. VCC at 415V 60 Hz is 1.338 [$VCC = (480/415)^2$]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value.).


In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


ECP28 1VS4 A

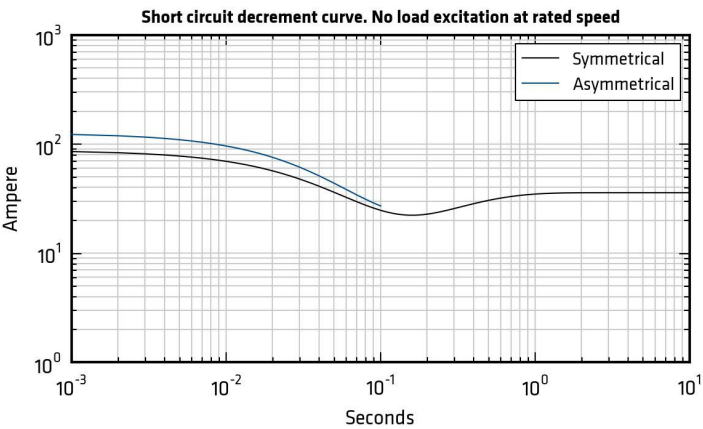


ECP28 2VS4 A

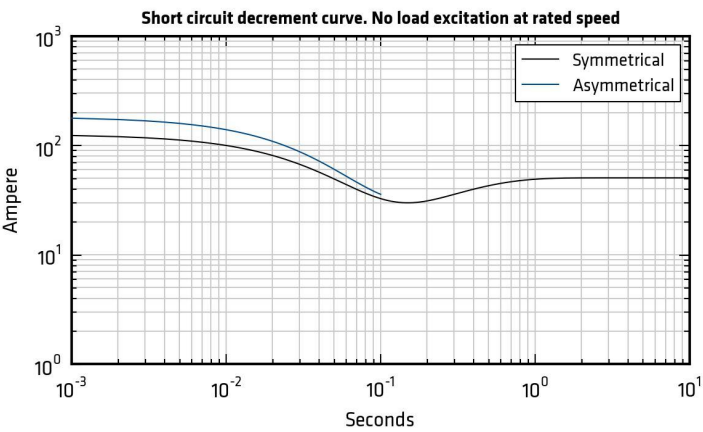

ECP28 0S4 A

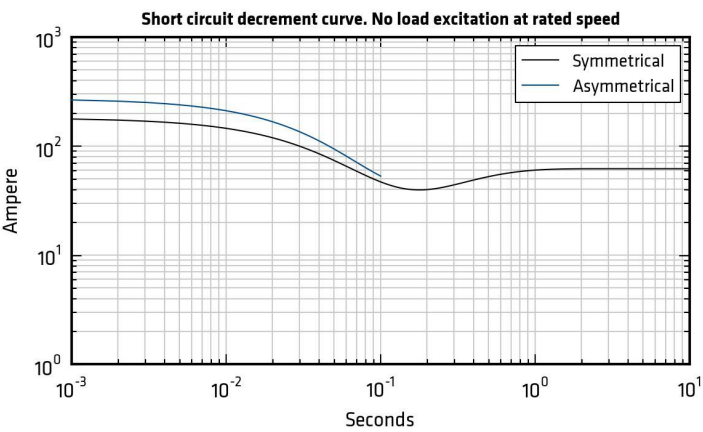


ECP28 S4 A

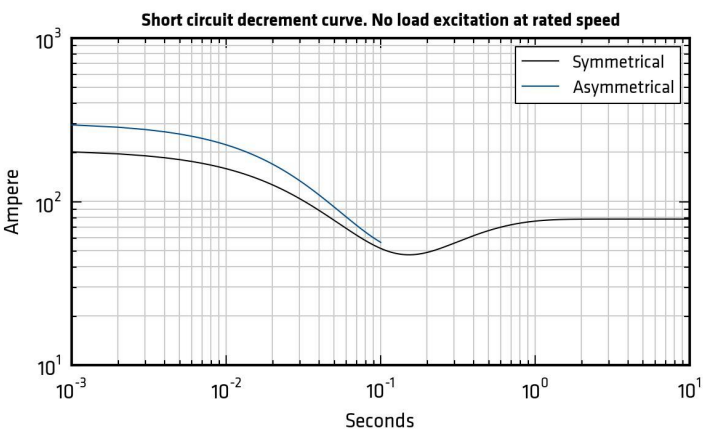


*Please refer to tables at page 6

50Hz Short circuit decrement curves - No load excitation at rated speed


ECP28 M4 A

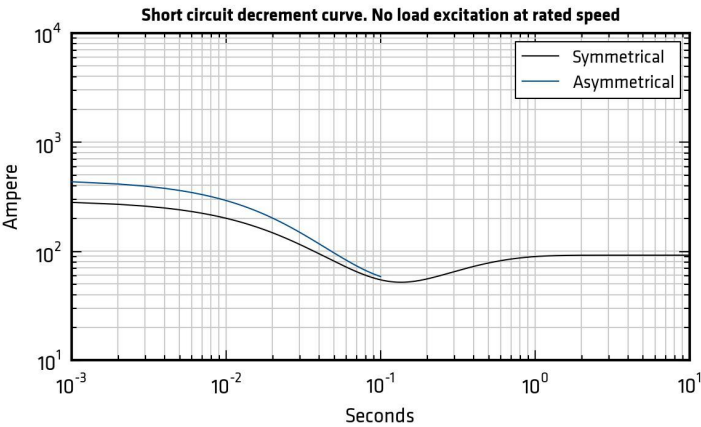

ECP28 2L4 A

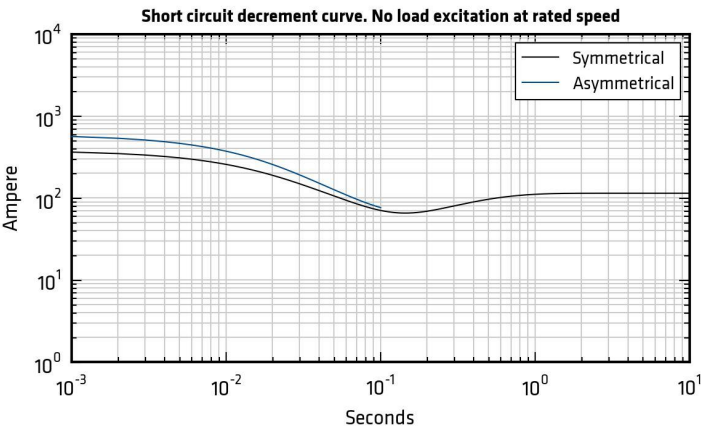


ECP28 VL4 A

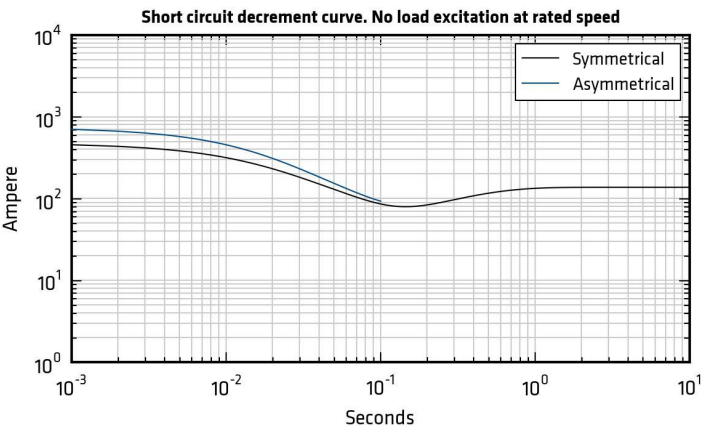


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


ECP28 1VS4 A

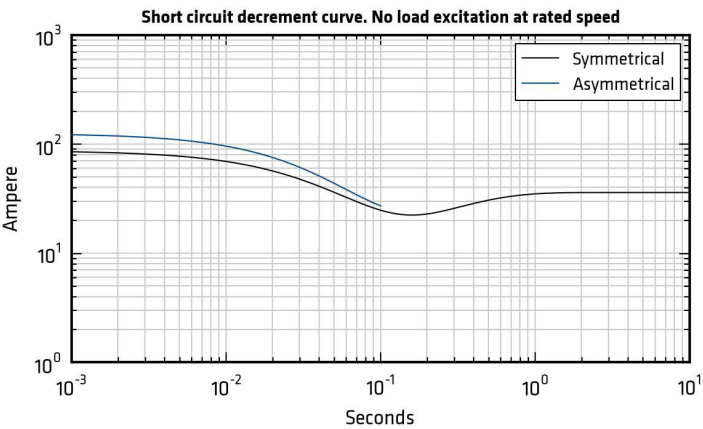


ECP28 2VS4 A

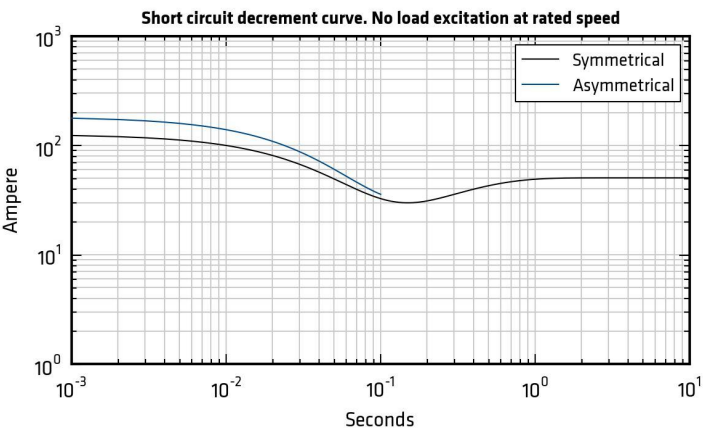

ECP28 0S4 A

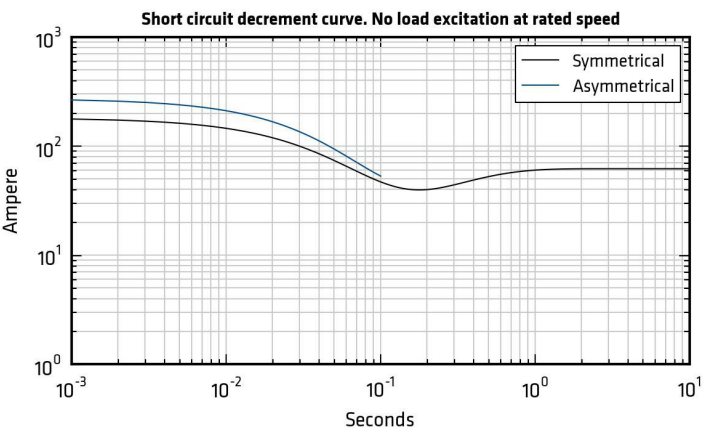


ECP28 S4 A

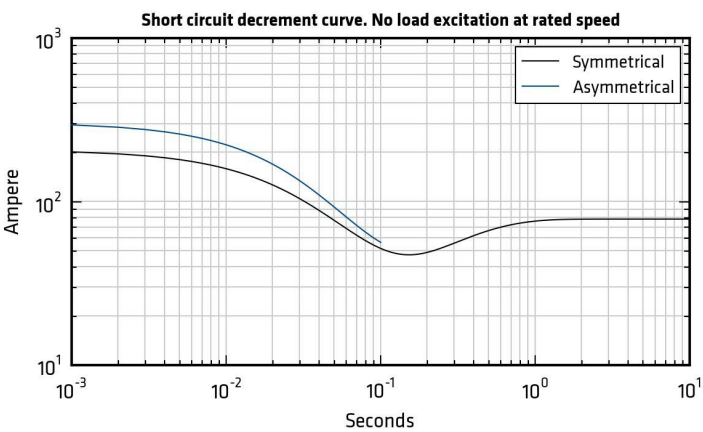


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


ECP28 M4 A

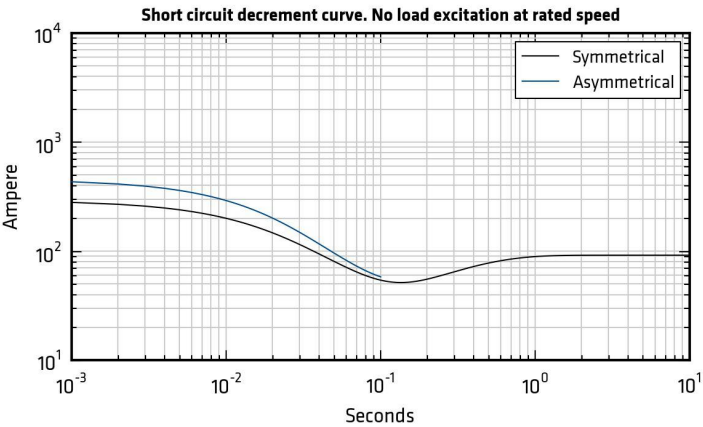

ECP28 2L4 A

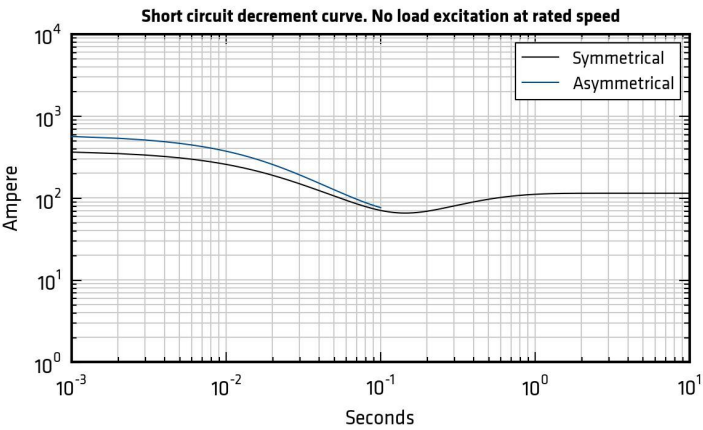

ECP28 VL4 A

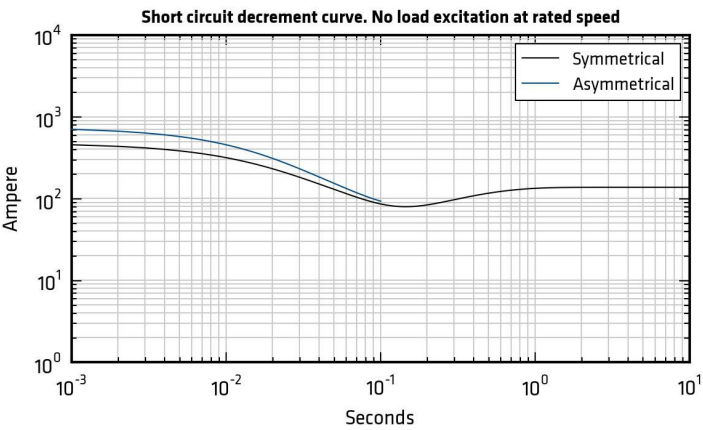


*Please refer to tables at page 6

Additional Characteristics


Data		ECP28 1VS4 A		ECP28 2VS4 A		ECP28 0S4 A		ECP28 S4 A		ECP28 M4 A		ECP28 2L4 A		ECP28 VL4 A	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
Damper cage		Aluminium													
Stator Winding Resistance (20°C)	Ω	0,951		0,582		0,43		0,283		0,198		0,128		0,106	
Rotor Winding Resistance (20°C)	Ω	0,911		1,032		1,13		1,26		1,396		1,67		1,86	
Stator Exciter Resistance (20°C)	Ω	10,6		10,6		10,6		10,6		10,6		10,6		10,6	
Rotor Exciter Resistance (20°C)	Ω	0,417		0,417		0,417		0,417		0,417		0,417		0,417	
Weight of complete generator	kg	79,0		86,0		96,0		104,0		115,0		136,0		162,0	
Unbalanced magnetic pull	kN/mm	3,0		3,0		3,0		3,0		3,8		4,5		4,7	
Air flow	m³/min	5,3	5,8	5,3	5,8	5,3	5,8	5,3	5,8	5,3	5,8	5,3	5,8	5,3	5,8
Noise level at 1m/7m	dB(A)	68/57	71/61	68/57	71/61	68/57	71/61	68/57	71/61	68/57	71/61	68/57	71/61	68/57	71/61

PQ Diagram

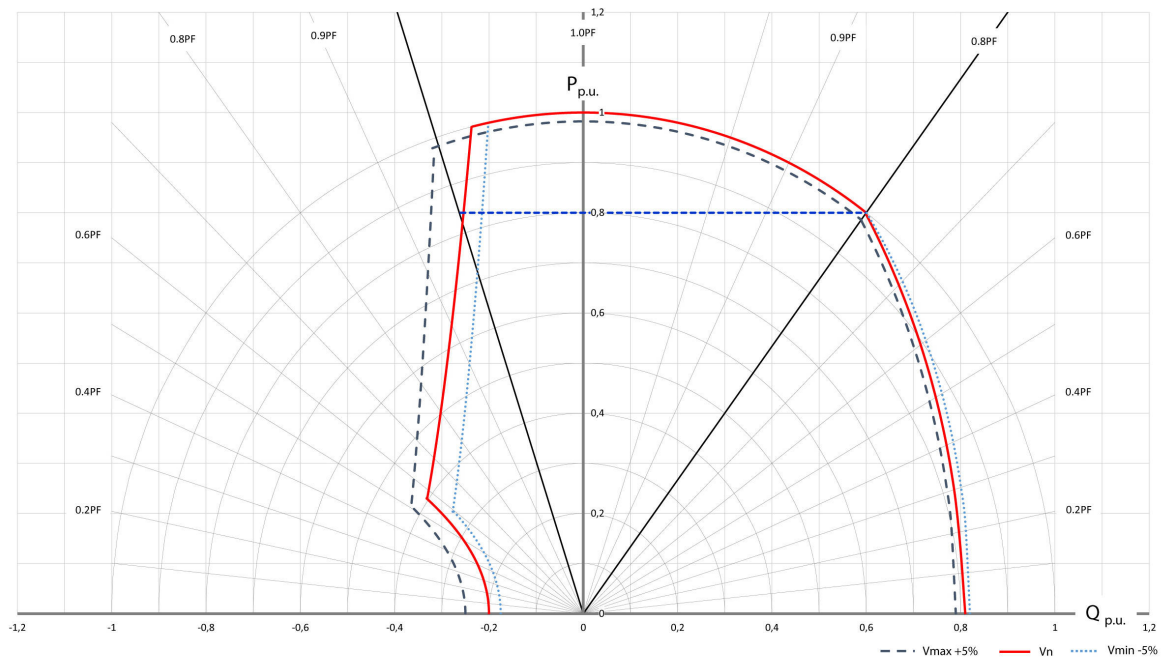


ECP28 1VS4 A

TWO BEARING MOMENTS OF INERTIA

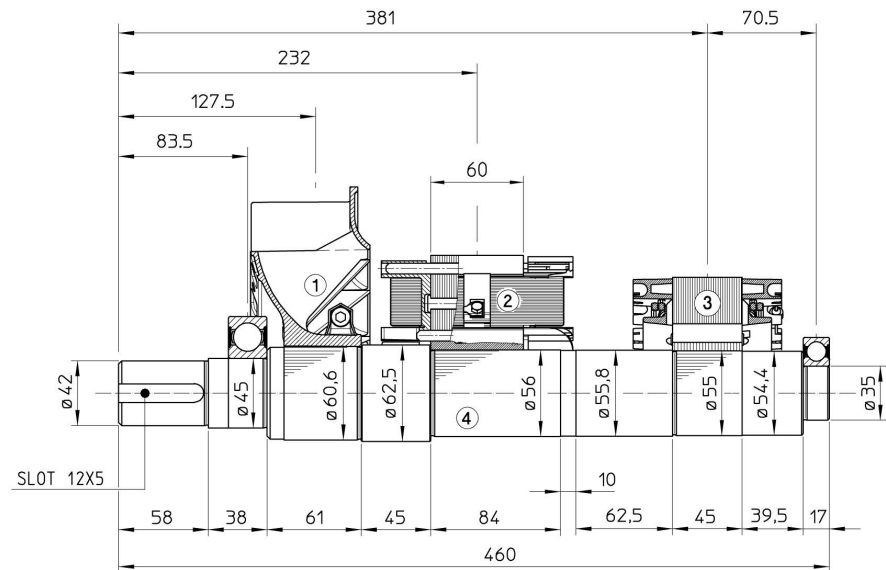


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.6	0.0044
2	MAIN ROTOR	10.9	0.0437
3	EX. ROTOR	5.5	0.0172
4	SHAFT	8.1	0.0031
TOTAL		25.1	0.0684

TWO BEARING DIMENSIONS

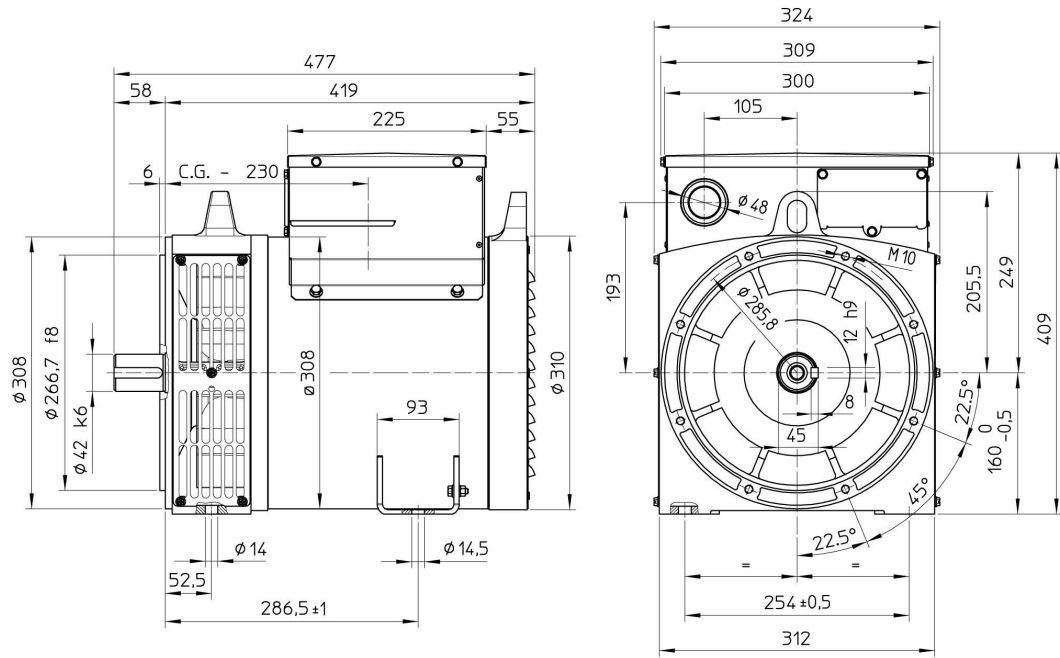

C.G.= GRAVITY CENTER


SINGLE BEARING MOMENTS OF INERTIA

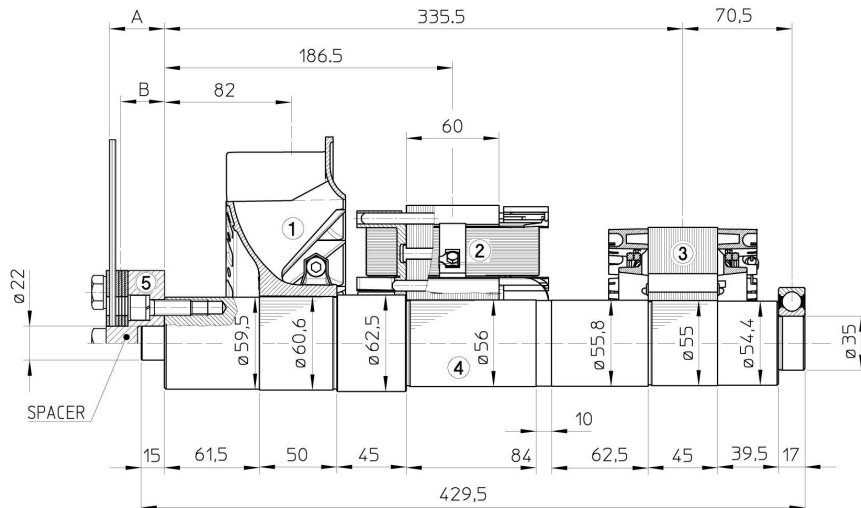

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.6	0.0044
2	MAIN ROTOR	10.9	0.0437
3	EX. ROTOR	5.5	0.0172
4	SHAFT	8.1	0.0033
TOTAL		25.1	0.0686

SAE N°	5	SHAFTS COUPLING FLEX PLATE			
	A	B	WEIGHT kg	J kgm ²	
6 1/2	4	2	1.08	0.0065	
7 1/2	4	2	1.35	0.0101	
8	35.6	28.3	2.84	0.0158	
10	27.6	22.9	3.25	0.0303	
11 1/2	14	11.2	3.6	0.0471	

SINGLE BEARING DIMENSIONS

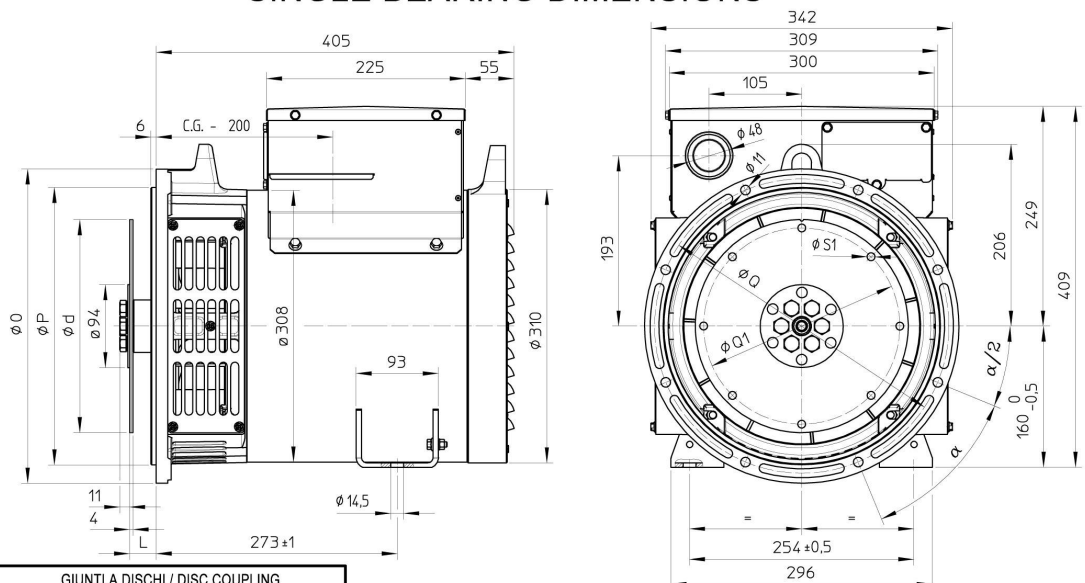


SAE N.	GIUNTI A DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG				
	d	L	Q1	S1	α _i
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	FLANGIA / FLANGE BRIDE / FLANSCH			
	O	P	Q	α
5	356	314.3	333.4	45°
4	403	362	381	30°
3	451	409.6	428.6	30°
2	490	447.7	466.7	30°

C.G.= GRAVITY CENTER


ECP28 2VS4 A

TWO BEARING MOMENTS OF INERTIA

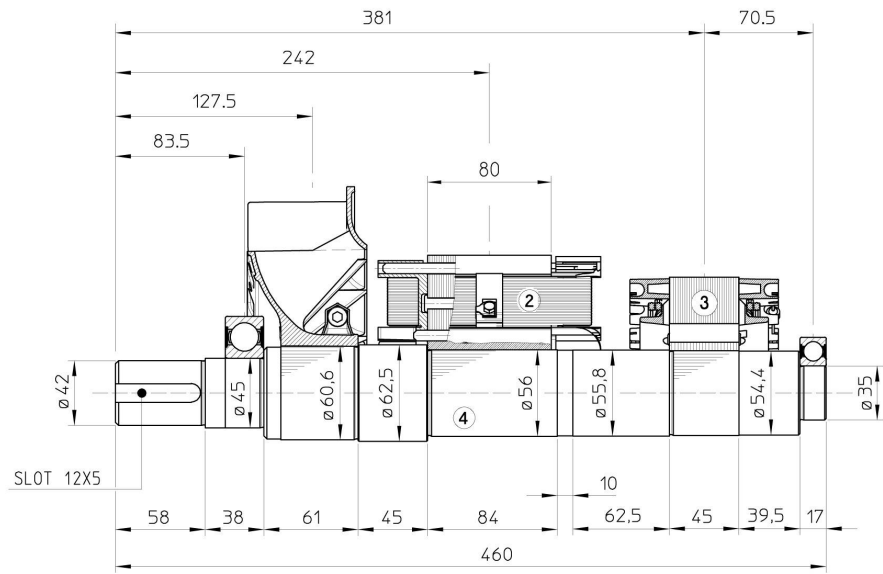


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.6	0.0044
2	MAIN ROTOR	13.5	0.0542
3	EX. ROTOR	5.5	0.0172
4	SHAFT	8.1	0.0031
TOTAL		27.7	0.0789

TWO BEARING DIMENSIONS

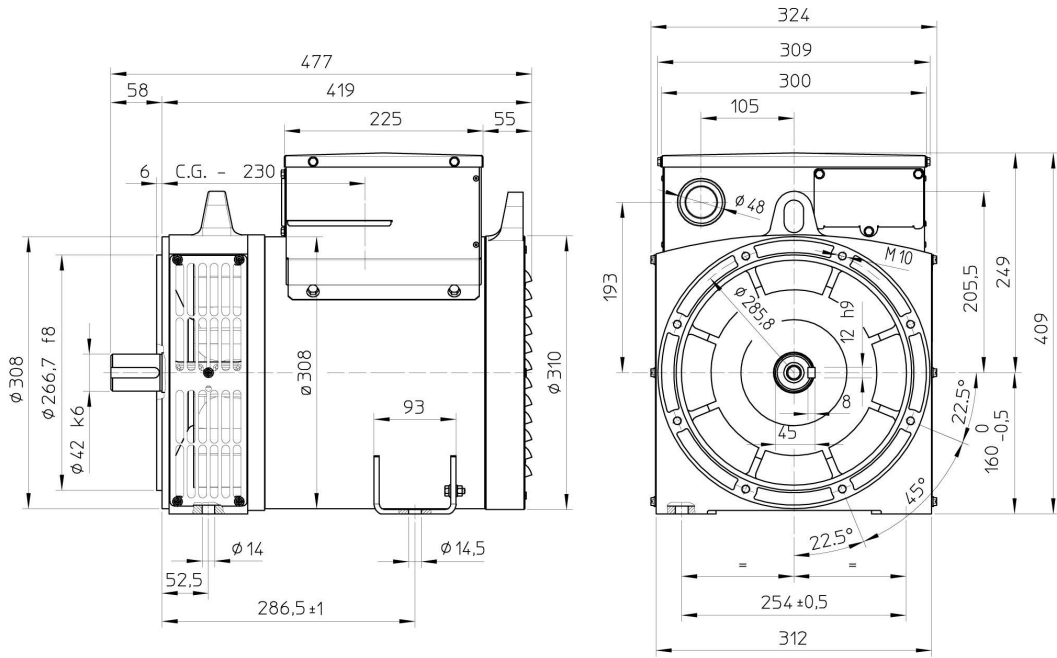

C.G.= GRAVITY CENTER


SINGLE BEARING MOMENTS OF INERTIA

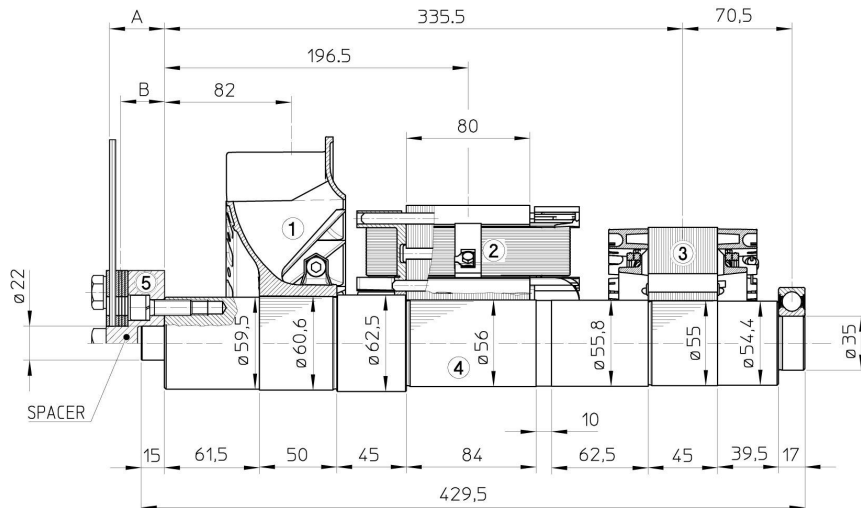

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.6	0.0044
2	MAIN ROTOR	13.5	0.0542
3	EX. ROTOR	5.5	0.0172
4	SHAFT	8.1	0.0033
TOTAL		27.7	0.0791

SAE N°	5	SHAFTS COUPLING FLEX PLATE			
	A	B	WEIGHT kg	J kgm ²	
6 1/2	4	2	1.08	0.0065	
7 1/2	4	2	1.35	0.0101	
8	35.6	28.3	2.84	0.0158	
10	27.6	22.9	3.25	0.0303	
11 1/2	14	11.2	3.6	0.0471	



SINGLE BEARING DIMENSIONS

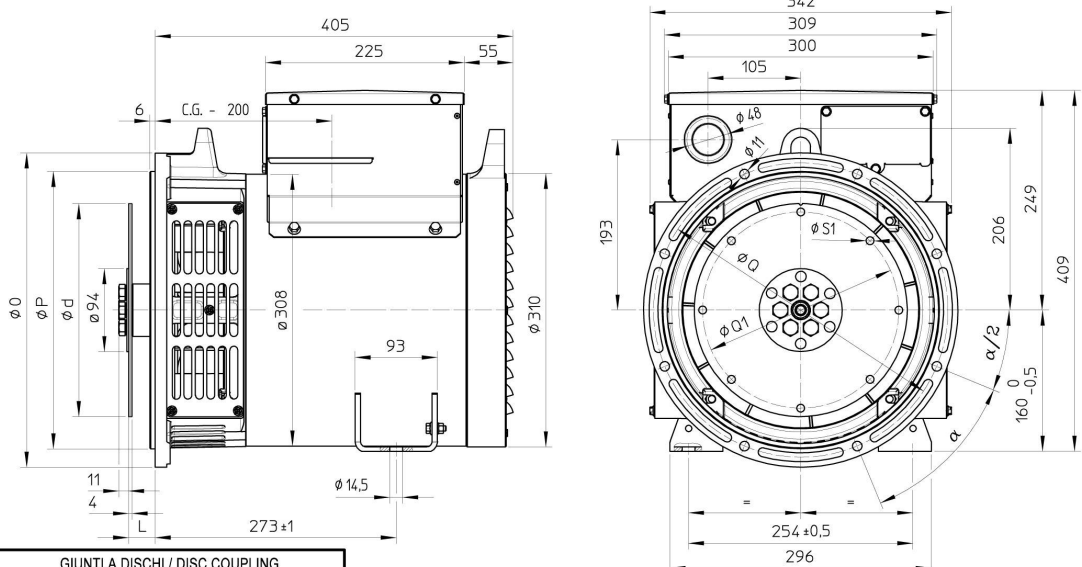


SAE N.	GIUNTI A DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG				
	d	L	Q1	S1	α _i
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	FLANGIA / FLANGE BRIDE / FLANSCH			
	O	P	Q	α
5	356	314.3	333.4	45°
4	403	362	381	30°
3	451	409.6	428.6	30°
2	490	447.7	466.7	30°

C.G.= GRAVITY CENTER

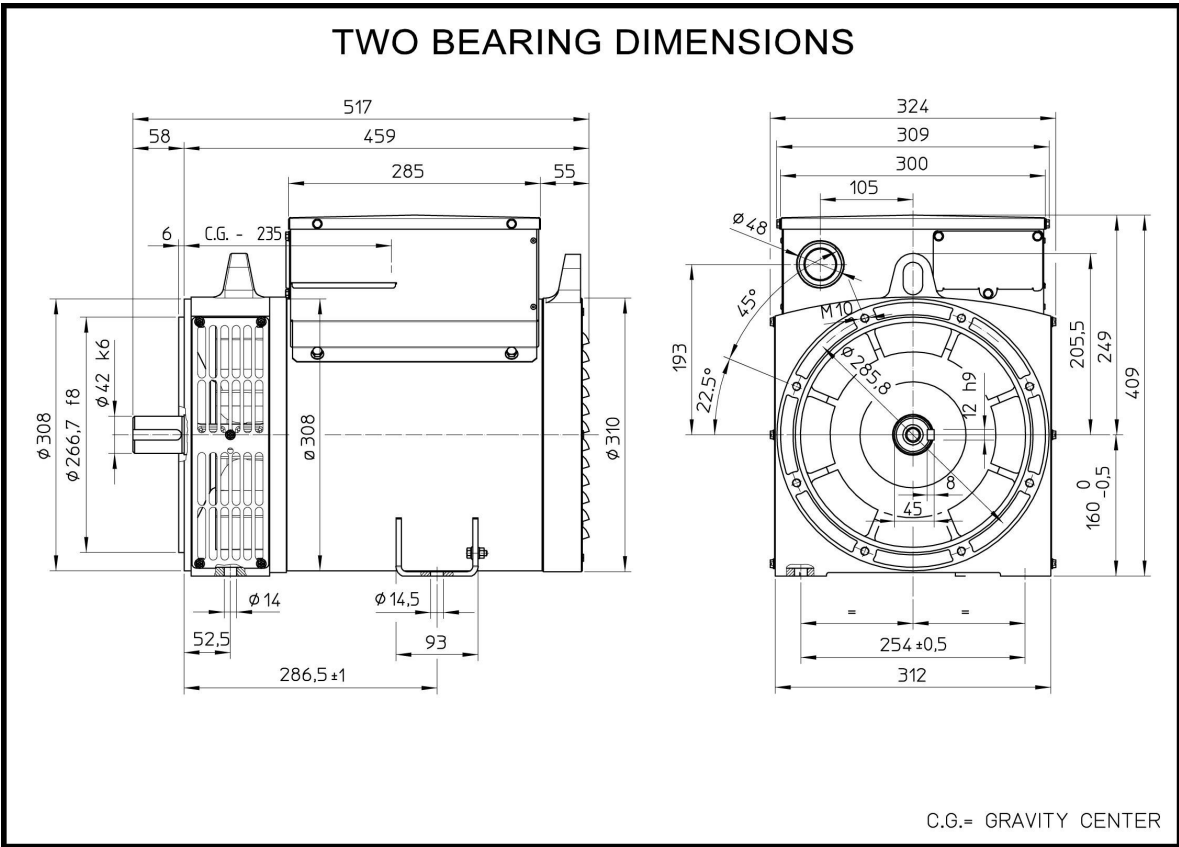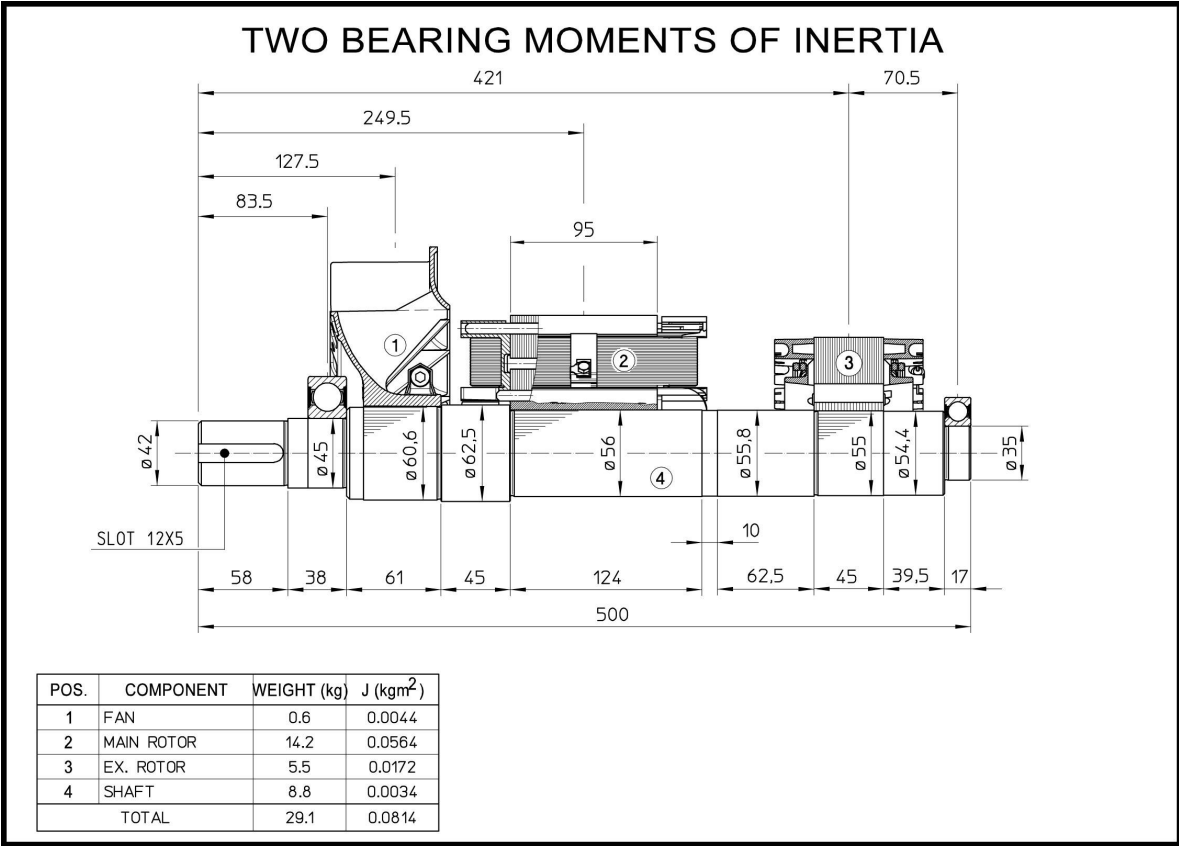


SINGLE BEARING MOMENTS OF INERTIA

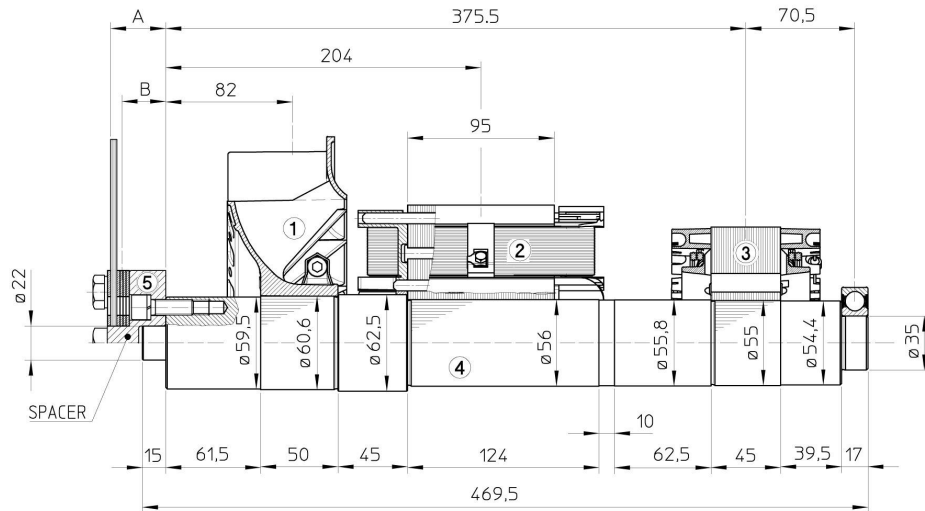

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.6	0.0044
2	MAIN ROTOR	14.2	0.0564
3	EX. ROTOR	5.5	0.0172
4	SHAFT	8.8	0.0036
TOTAL		29.1	0.0816

SAE N°	A	B	WEIGHT kg	J kgm ²
6 1/2	4	2	1.08	0.0065
7 1/2	4	2	1.35	0.0101
8	35.6	28.3	2.84	0.0158
10	27.6	22.9	3.25	0.0303
11 1/2	14	11.2	3.6	0.0471



SINGLE BEARING DIMENSIONS

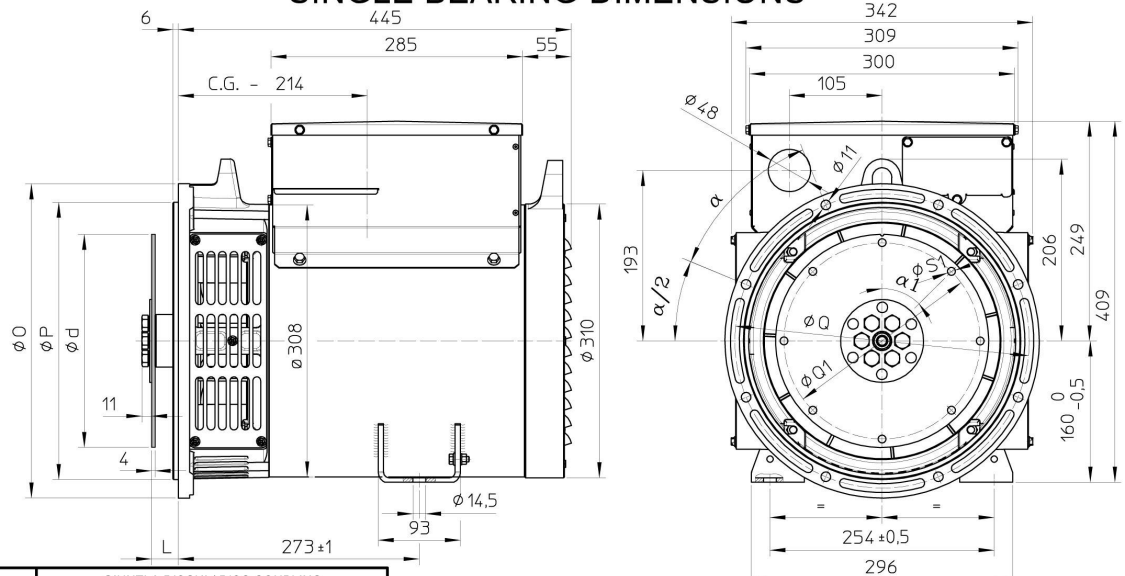


SAE N.	d	L	Q1	S1	α_1
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	O	P	Q	α
5	356	314.3	333.4	45°
4	403	362	381	30°
3	451	409.6	428.6	30°
2	490	447.7	466.7	30°

C.G.= GRAVITY CENTER

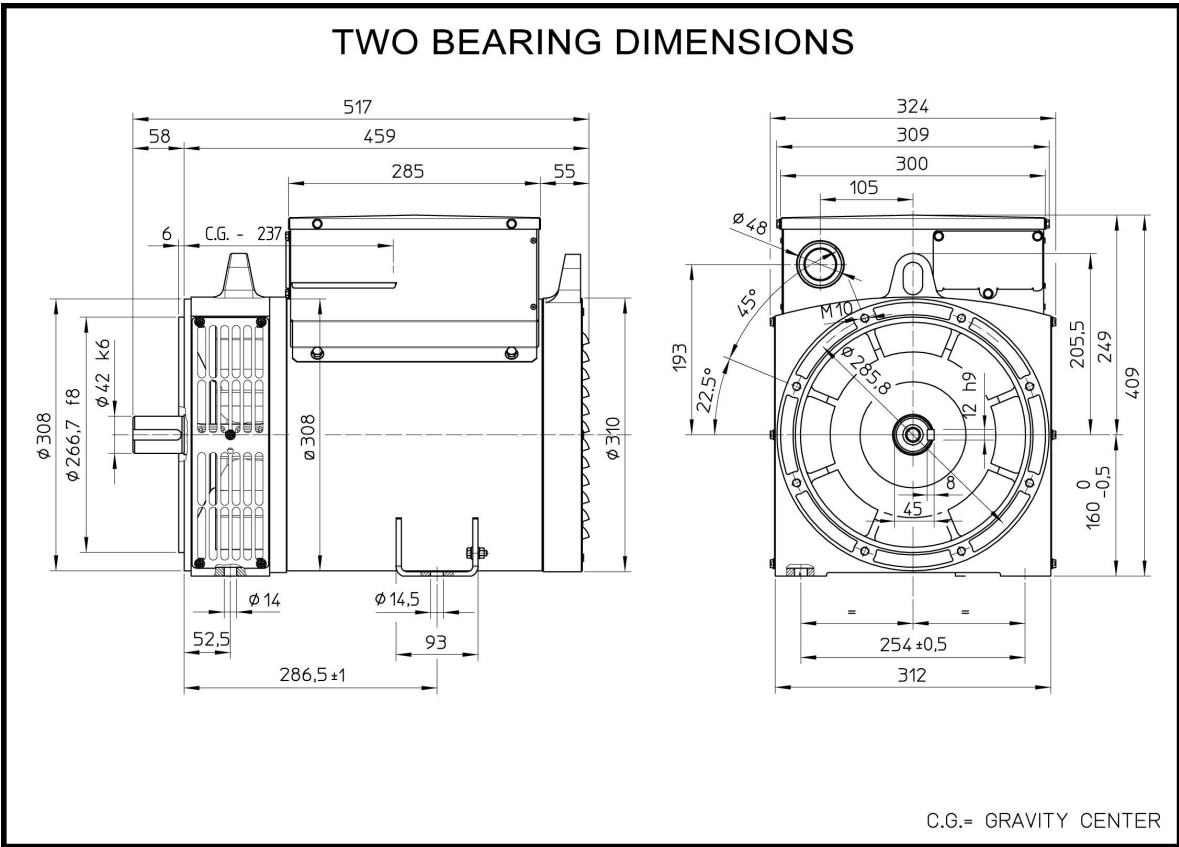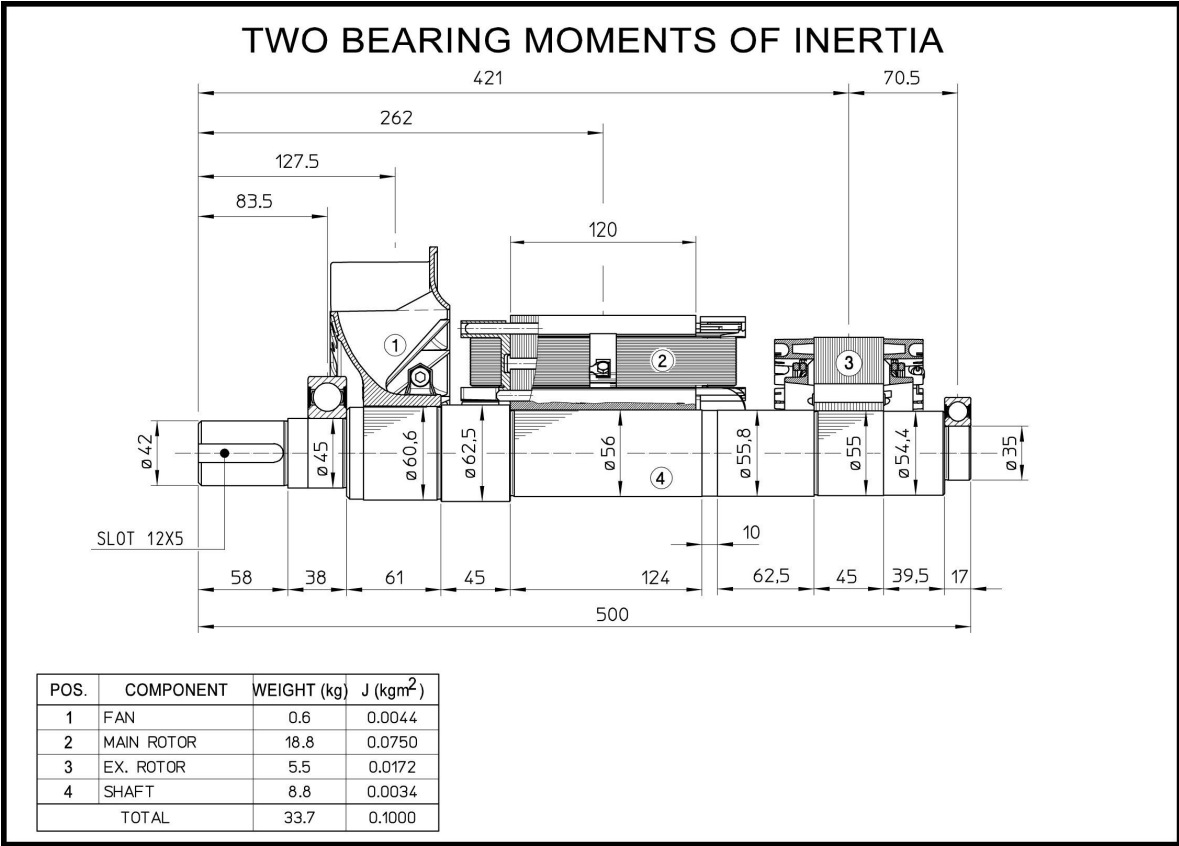


SINGLE BEARING MOMENTS OF INERTIA

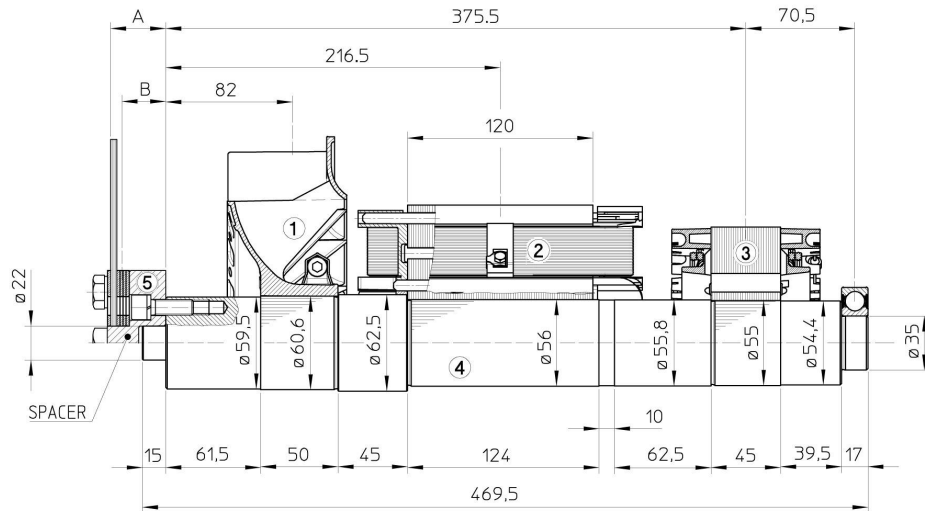

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.6	0.0044
2	MAIN ROTOR	18.8	0.0750
3	EX. ROTOR	5.5	0.0172
4	SHAFT	8.8	0.0036
TOTAL		33.7	0.1002

SAE N°	A	B	WEIGHT kg	J kgm ²
5	SHAFTS COUPLING FLEX PLATE			
6 1/2	4	2	1.08	0.0065
7 1/2	4	2	1.35	0.0101
8	35.6	28.3	2.84	0.0158
10	27.6	22.9	3.25	0.0303
11 1/2	14	11.2	3.6	0.0471

SINGLE BEARING DIMENSIONS

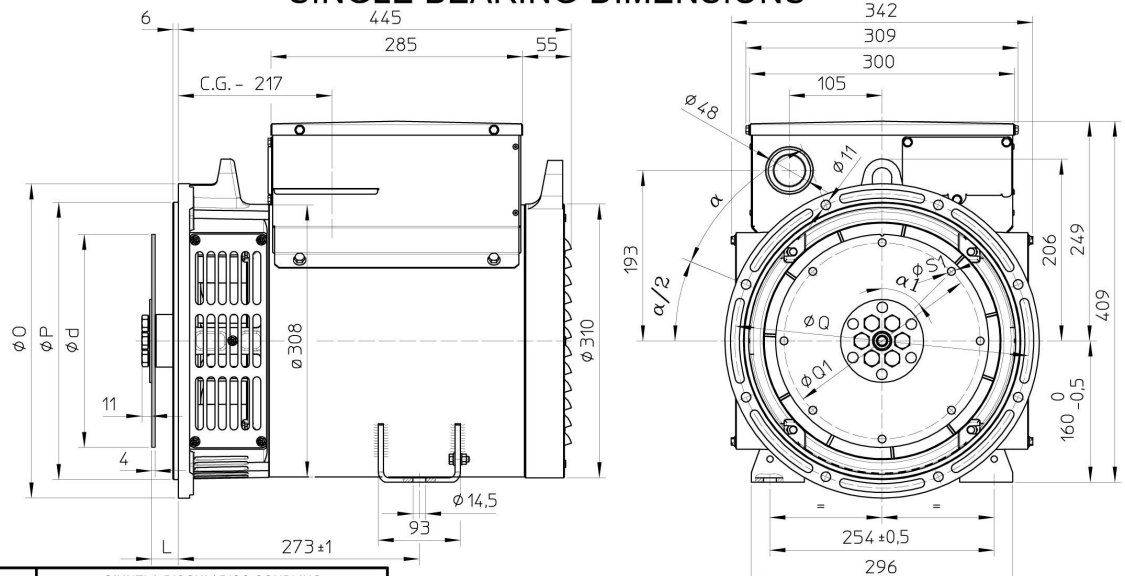

SAE N.	GIUNTI A DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG				
	d	L	Q1	S1	α ₁
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	FLANGIA / FLANGE BRIDE / FLANSCH			
	O	P	Q	α
5	356	314.3	333.4	45°
4	403	362	381	30°
3	451	409.6	428.6	30°
2	490	447.7	466.7	30°

C.G.= GRAVITY CENTER

SINGLE BEARING DIMENSIONS



The technical drawing illustrates the dimensions of a single bearing assembly. The side view on the left shows the overall length L, with segments of 6, 285, and 55 mm. The distance from the center of gravity (C.G.) to the end face is 238 mm. Key diameters include $\phi 0$, ϕP , ϕd , $\phi 308$, and $\phi 310$. A vertical dimension of 11 mm is shown near the shaft interface, and a base width of 4 mm is indicated. The bottom view shows mounting feet with widths of $\phi 14,5$, 93, 71, and 131,5 mm, and a total width of 273 ± 1 mm.

The front view on the right shows the circular flange with a diameter of $\phi 48$ and a central hole of $\phi 11$. It features eight mounting holes with diameter ϕQ spaced at an angle α around a circle of diameter ϕO_1 . The outer diameter is 342 mm, with internal diameters of 309 and 300 mm. The distance between mounting holes is 105 mm. Vertical dimensions include 193, 206, 249, and 409 mm. Horizontal dimensions show a total width of 254 $\pm 0,5$ mm and a base width of 296 mm. A tolerance of 160 -0,5 mm is specified for the mounting area.


SAE N.	GIUNTI A DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG				
	d	L	Q1	S1	α_1
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	FLANGIA / FLANGE BRIDE / FLANSCH			α
	O	P	Q	
5	356	314.3	333.4	45°
4	403	362	381	30°
3	451	409.6	428.6	30°
2	490	447.7	466.7	30°

C.G.= GRAVITY CENTER

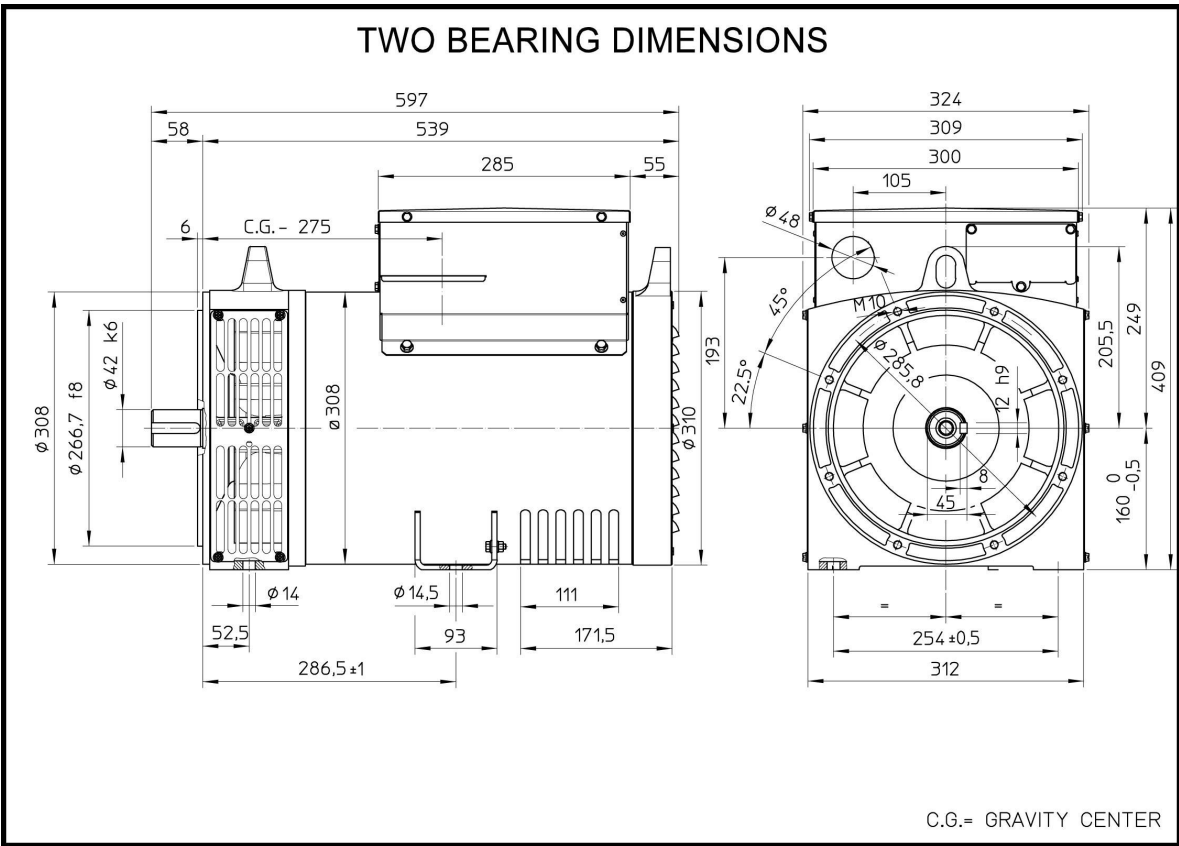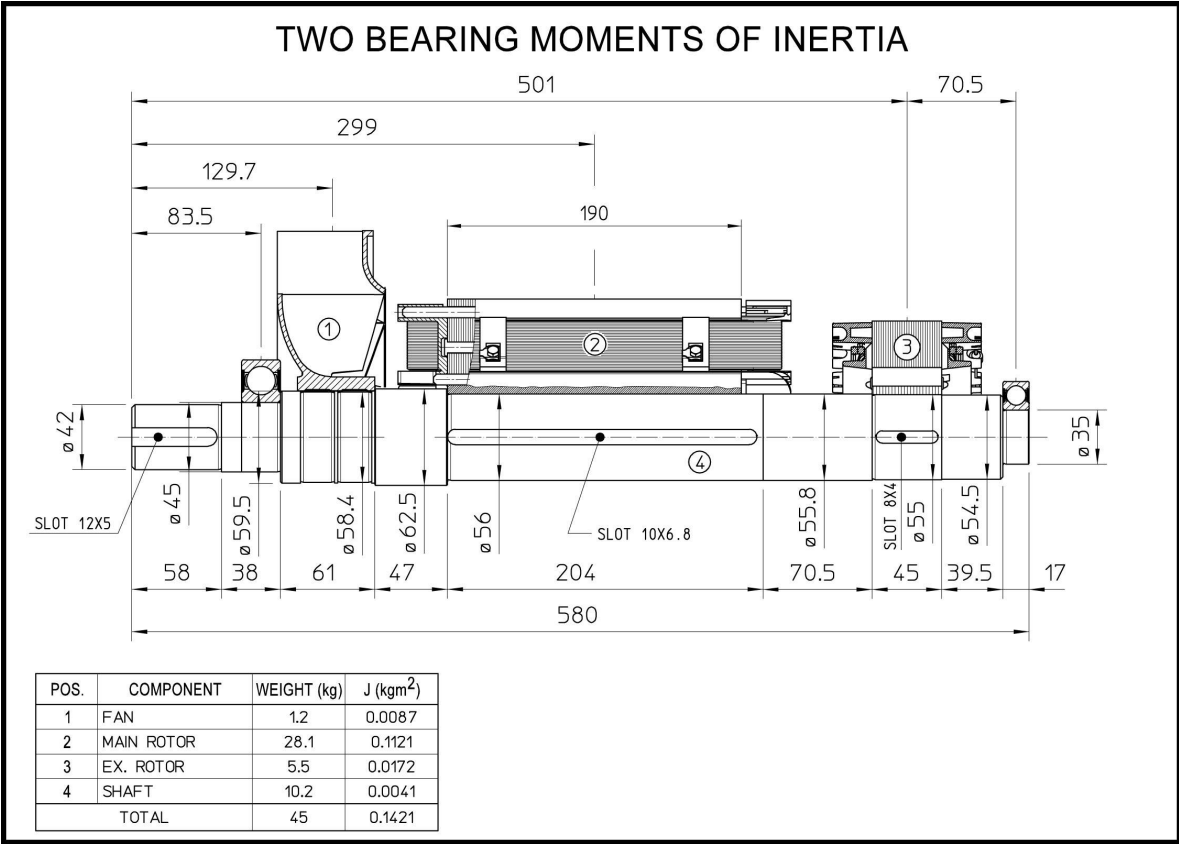


SINGLE BEARING MOMENTS OF INERTIA

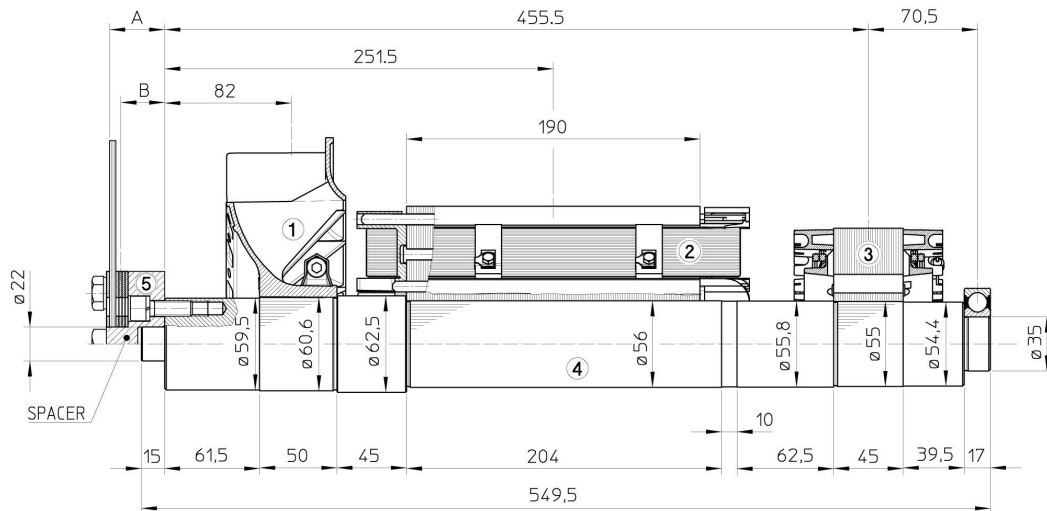

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.6	0.0044
2	MAIN ROTOR	28.3	0.1129
3	EX. ROTOR	5.5	0.0172
4	SHAFT	10.4	0.0042
TOTAL		44.8	0.1387

SAE N°	A	B	WEIGHT kg	J kgm ²
5	SHAFTS COUPLING FLEX PLATE			
6 1/2	4	2	1.08	0.0065
7 1/2	4	2	1.35	0.0101
8	35.6	28.3	2.84	0.0158
10	27.6	22.9	3.25	0.0303
11 1/2	14	11.2	3.6	0.0471



SINGLE BEARING DIMENSIONS

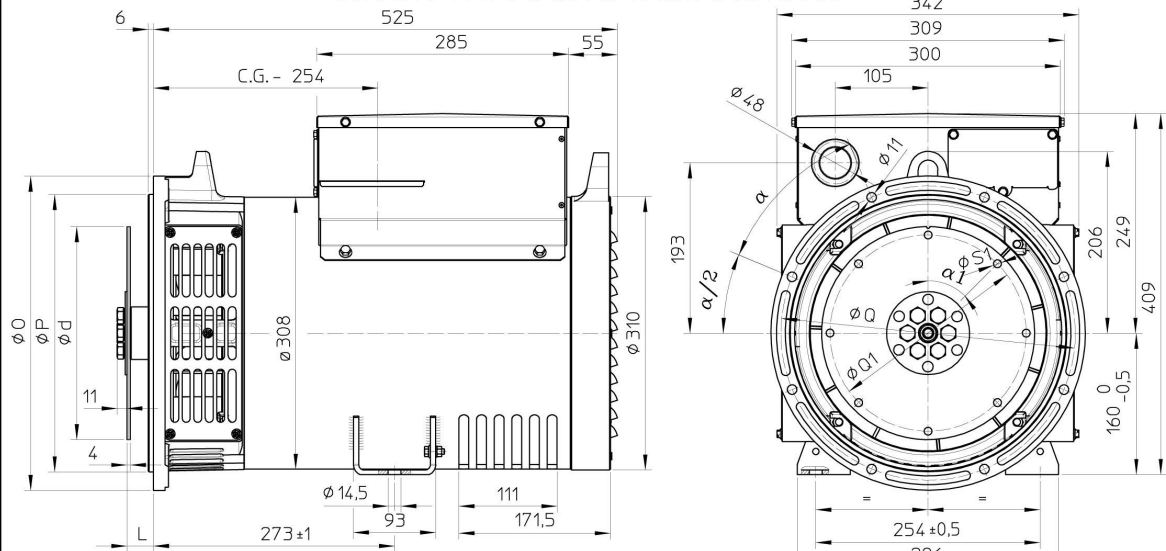


SAE N.	d	L	Q1	S1	α ₁
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	O	P	Q	α
5	356	314.3	333.4	45°
4	403	362	381	30°
3	451	409.6	428.6	30°
2	490	447.7	466.7	30°

C.G.= GRAVITY CENTER

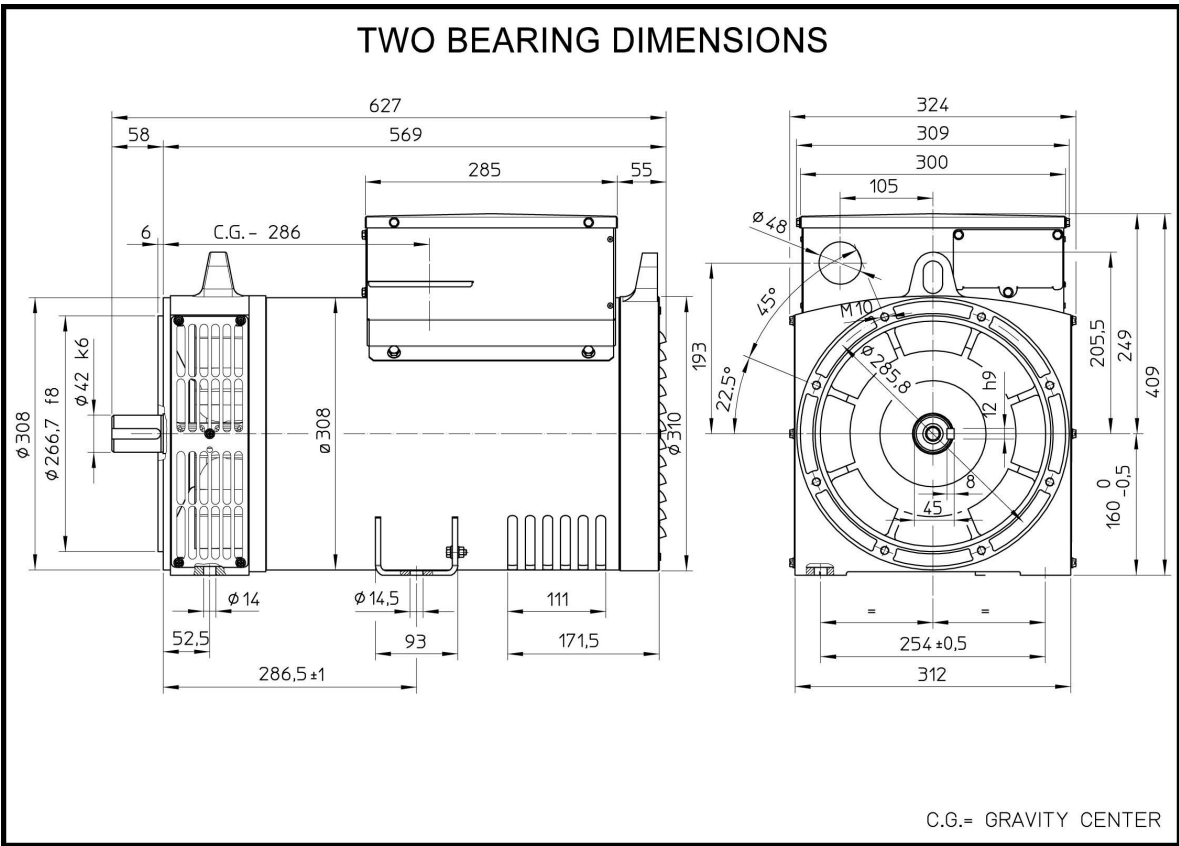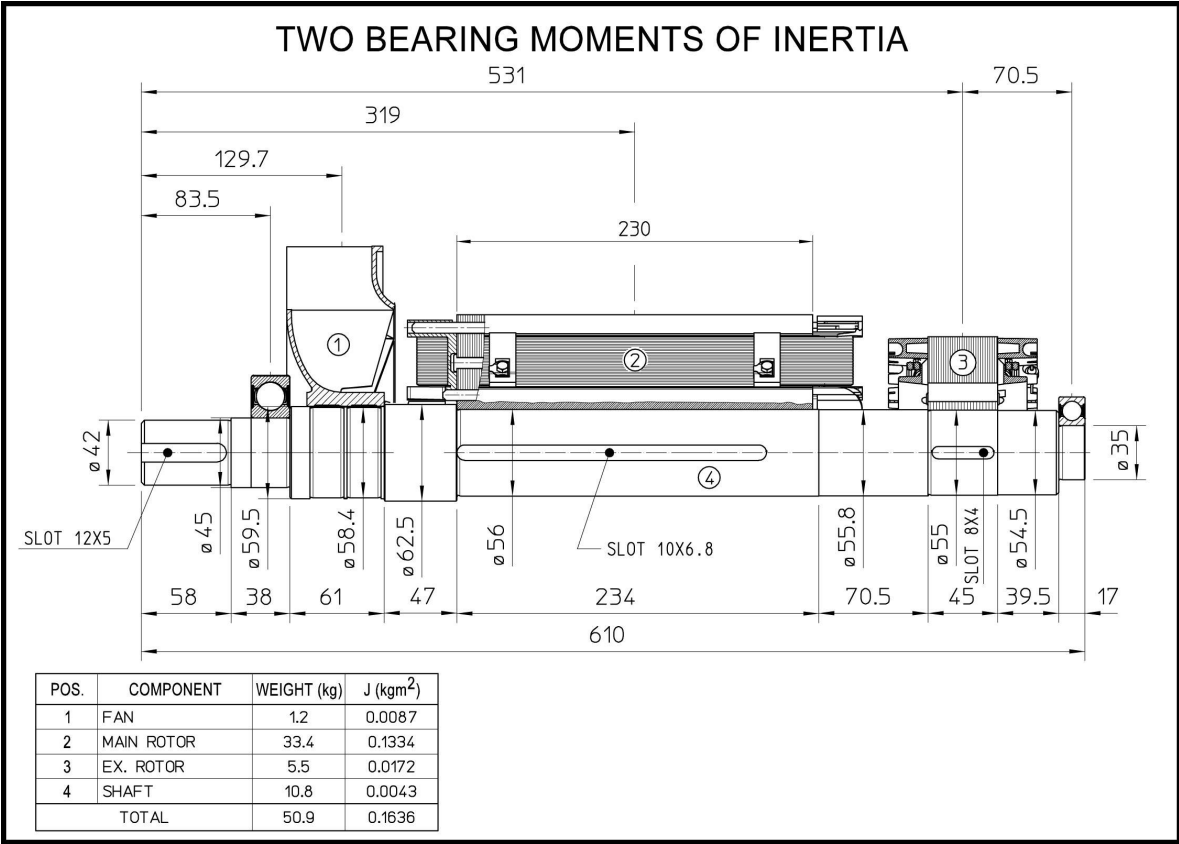


SINGLE BEARING MOMENTS OF INERTIA

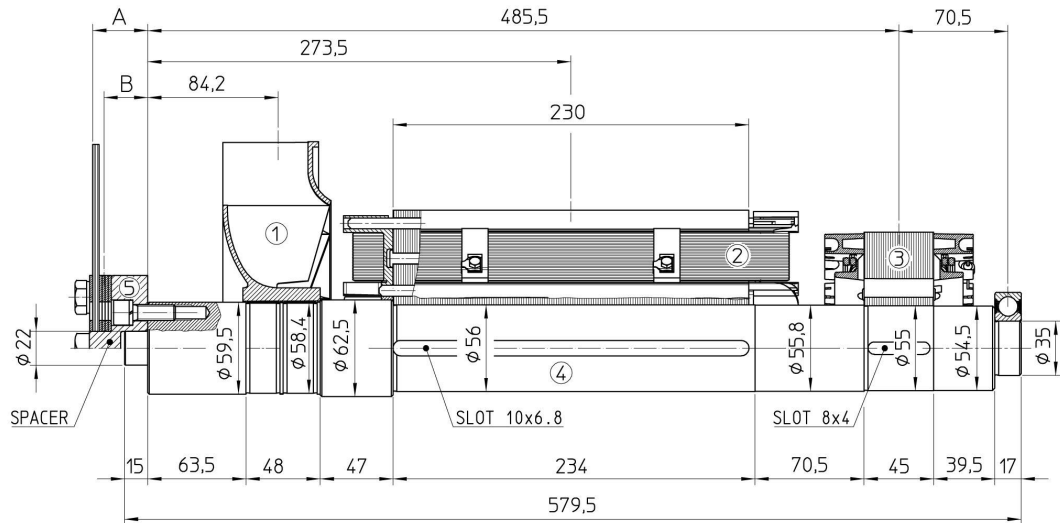

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.2	0.0087
2	MAIN ROTOR	33.4	0.1334
3	EX. ROTOR	5.5	0.0172
4	SHAFT	10.8	0.0043
TOTAL		50.9	0.1636

SAE N°	5	SHAFTS COUPLING FLEX PLATE			
	A	B	WEIGHT kg	J kgm ²	
6 1/2	4	2	1.08	0.0065	
7 1/2	4	2	1.35	0.0101	
8	35.6	28.3	2.84	0.0158	
10	27.6	22.9	3.25	0.0303	
11 1/2	14	11.2	3.6	0.0471	

SINGLE BEARING DIMENSIONS

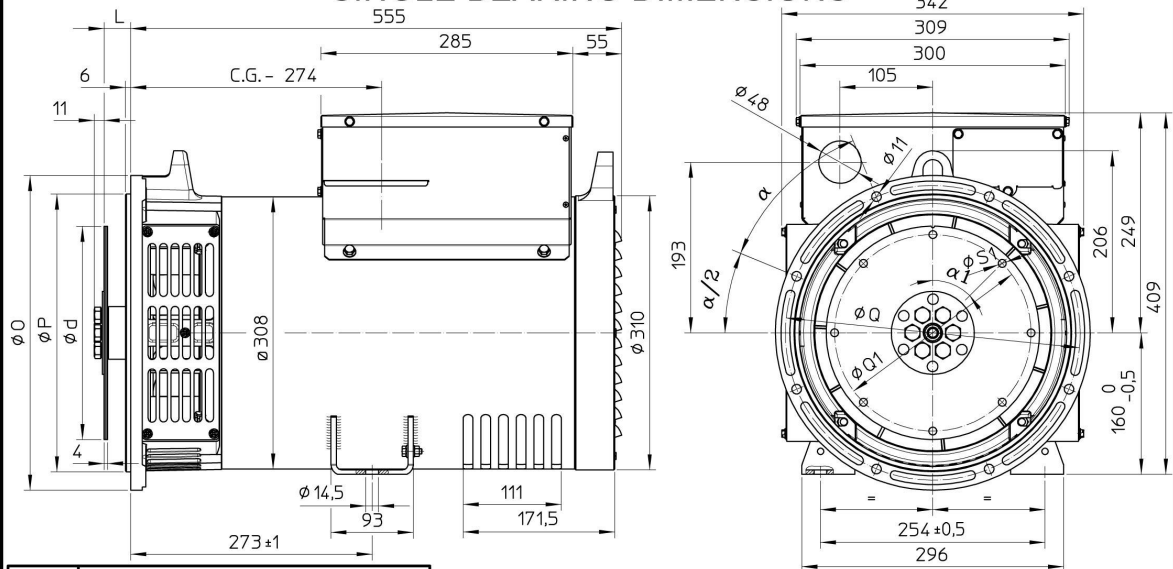

SAE N.	GIUNTI A DISCHI / DISC COUPLING DISCQUE DE MONOPALIER / SCHEIBENKUPPLUNG				
	d	L	Q1	S1	α ₁
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	FLANGIA / FLANGE BRIDE / FLANSCH			
	O	P	Q	α
5	356	314.3	333.4	45°
4	403	362	381	30°
3	451	409.6	428.6	30°
2	490	447.7	466.7	30°

C.G.= GRAVITY CENTER

[illegible]

Mecc Alte SpA (HQ)

Via Roma
20 - 36051 Creazzo
Vicenza - ITALY
T: +39 0444 396111
F: +39 0444 396166

Mecc Alte Portable

Via Roma
20 - 36051 Creazzo
Vicenza - ITALY
T: +39 0444 396111
F: +39 0444 396166

Mecc Alte Power Products srl

Via Melaro
2 - 36075 Montecchio
Maggiore (VI) - ITALY
T: +39 0444 1831295
F: +39 0444 1831306

Zanardi Alternatori srl

Via Dei Laghi
48/B - 36077 Altavilla
Vicenza - ITALY
T: +39 0444 370799
F: +39 0444 370330

United Kingdom

Mecc Alte U.K. LTD
6 Lands' End Way
Oakham
Rutland LE15 6RF
T: +44 (0) 1572 771160
F: +44 (0) 1572 771161

Spain

Mecc Alte España S.A.
C/ Rio Taibilla, 2
Polig. Ind. Los Valeros
03178 Benijofar (Alicante)
T: +34 (0) 96 6702152
F: +34 (0) 96 6700103

China

Mecc Alte Alternator Haimen LTD
755 Nanhai East Rd
Jiangsu HEDZ 226100 PRC
T: +86 (0) 513 82325758
F: +86 (0) 513 82325768

India

Mecc Alte India PVT LTD
Plot NO: 1, Sanaswadi
Talegaon
Dhamdhare Road Taluka:
Shirur, District:
Pune - 412208
Maharashtra, India
T: +91 2137 619600
F: +91 2137 619699

U.S.A. and Canada

Mecc Alte Inc.
1229 Adams Drive
McHenry, IL, 60051
T: +1 815 344 0530
F: +1 815 344 0535

Germany

Mecc Alte Generatoren GmbH
Ensener Weg 21
D-51149 Köln
T: +49 (0) 2203 503810
F: +49 (0) 2203 503796

Australia

Mecc Alte Alternators PTY LTD
10 Duncan Road, PO Box 1046
Dry Creek, 5094, South
Australia
T: +61 (0) 8 8349 8422
F: +61 (0) 8 8349 8455

France

Mecc Alte International S.A.
Z.E. La Gagnerie
16330 ST. Amant de Boixe
T: +33 (0) 545 397562
F: +33 (0) 545 398820

Far East

Mecc Alte (F.E.) PTE LTD
19 Kian Teck Drive
Singapore 628836
T: +65 62 657122
F: +65 62 653991

The logo for Mecc Alte, featuring the brand name in a stylized, bold font within a rounded rectangular border.