


# VYR-60

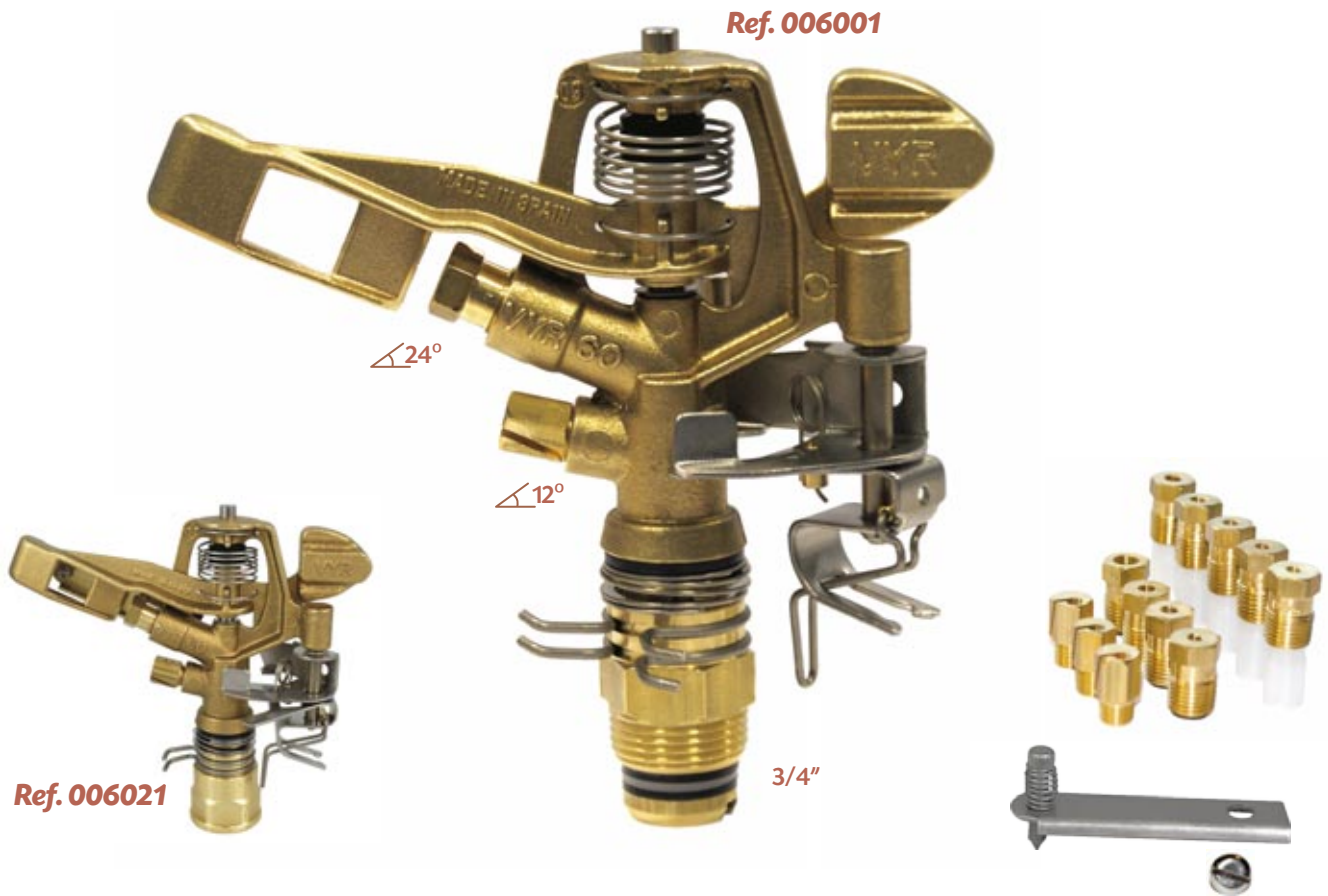

Ref. 006001

Ref. 006021

## VYR-60 · Part circle AG

### GENERAL PROPERTIES:

- Part circle impact sprinkler, medium flow.
- 3/4" male or female connection.
- Made of brass and stainless steel.
- High-resistance rotating joints.
- Nozzle angles of 24° and 12°
- Part circle mechanical system using clips that are very easy and quick to adjust.
- Used in full coverage irrigation with medium flow to cover the side and corner areas.

### TECHNICAL SPECIFICATIONS:

- Reach: 12 - 19 m / 39 - 62 ft.
- Flow: 800 - 3270 L/H / 211 - 863 GPH
- Working pressure: 1.75 - 5 BAR / 25 - 72 PSI.
- Area: Part or full circle.
- Nozzles: One main long reach nozzle and a secondary short reach nozzle.
- Trajectory angles: 24° and 12°
- Maximum stream height: 3.8 m / 12,5 ft.
- Rotation time: Depending on the pressure and the nozzles, the rotation will be constant and continuous.
- Uniformity coefficient higher than 90% in areas of 15x18R, 18x18T and 18x20T (meters).

### APPLICATIONS:

- Horticultural plantations, cereals, tubers, leguminous plants and fruit trees.

### MEASUREMENTS:

- Height: 16 cm / 6,3 in.
- Width: 18 cm / 7,1 in.
- Weight: 608 g / 1,34 Lbs.
- Units per box: 25

### OPTIONS:

- Threads in BSP or NPT under demand.
- Plate with diffuser pin for the main jet.
- Foldable tripod for mobile installation.



### MODELS:

- Ref. 006001: Without diffuser pin. Male.
- Ref. 006003: With diffuser pin. Male.
- Ref. 006020: Without diffuser pin. Female.
- Ref. 006021: With diffuser pin. Female.
- Ref. 106000: Diffuser pin assembly.

Special mechanical and hydraulic design for energy saving and an optimal coverage coefficient.



## TABLES & PARTS

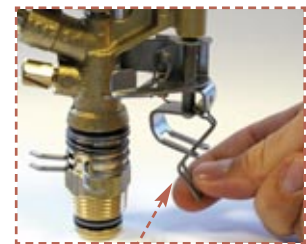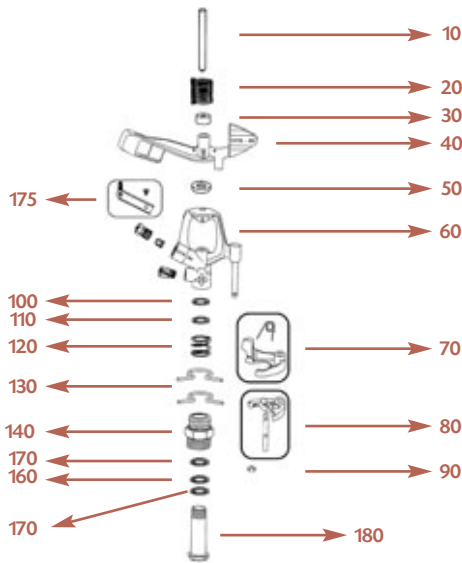

Easy to unblock the part circle sector part

### Performance nozzle tables VYR-60

Long range nozzles (long vane) + plug

NOZZLE	3,2 mm 1/8"		3,6 mm 9/64"		4 mm 5/32"		4,4 mm 11/64"		4,8 mm 3/16"		5,2 mm 13/64"		5,6 mm 7/32"	
	BAR PSI	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH
2,5	620	26	790	26,5	970	27,5	1160	30	1390	32	1640	32,5	1720	34
36	164	85	209	87	256	90	306	98	367	105	433	107	454	112
3	680	26	860	26,5	1050	28	1270	30,5	1510	32	1790	33,5	1880	35
44	180	85	227	87	277	92	335	100	399	105	473	110	496	115
3,5	740	26,5	930	27	1140	29,5	1380	31,5	1640	33	1930	34,5	2140	36
51	195	87	246	89	301	97	364	103	433	108	510	113	565	118
4	790	26,5	1000	28	1220	29,5	1470	32,5	1750	34	2060	35,5	2240	37
58	209	87	264	92	322	97	388	107	462	112	544	116	591	121
4,5	840	27	1060	29	1290	30	1550	33,5	1860	35	2180	36	2410	38,5
65	222	89	280	95	341	98	409	110	491	115	576	118	636	126
5	880	27,5	1120	29,5	1360	30,5	1640	34	1960	36	2290	37,5	2520	39,5
73	232	90	296	97	359	100	433	112	517	118	605	123	665	130
5,5	930	28	1170	30	1430	31	1720	35	2060	36,5	2380	38	2640	40
80	246	92	309	98	378	102	454	115	544	120	628	125	697	131

(Sprinkler at 1m height)



Long range nozzles (long vane) + short range nozzle

NOZZLE	3,2 x 2,4 mm 1/8 x 3/32"		3,6 x 2,4 mm 9/64 x 3/32"		4 x 2,4 mm 5/32 x 3/32"		4,4 x 2,4 mm 11/64 x 3/32"		4,4 x 2,8 mm 11/64 x 7/64"		4,8 x 2,8 mm 3/16 x 7/64"		4,8 x 3,2 mm 3/16 x 1/8"		5,2 x 3,2 mm 13/64 x 1/8"		5,6 x 3,2 mm 7/32 x 1/8"	
	BAR PSI	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH	Ø m Ø ft	L/H GPH
2,5	980	26	1150	26,5	1320	27,5	1520	30	1730	30	1895	32	2050	32	2310	32,5	2460	34
36	259	85	304	87	349	90	402	98	457	98	501	105	542	105	610	107	650	112
3	1070	26	1250	26,5	1450	28	1670	30,5	1800	30,5	2100	32	2240	32	2520	33,5	2730	35
44	283	85	330	87	383	92	441	100	476	100	555	105	592	105	666	110	721	115
3,5	1160	26,5	1350	27	1560	29,5	1800	31,5	1915	31,5	2255	33	2420	33	2720	34,5	2915	36
51	306	87	357	89	412	97	476	103	506	103	596	108	639	108	719	113	770	115
4	1240	26,5	1450	28	1670	29,5	1920	32,5	2070	32,5	2400	34	2590	34	2910	35,5	3035	37
58	328	87	383	92	441	97	507	107	547	107	634	112	684	112	769	116	802	121
4,5	1320	27	1540	29	1770	30	2030	33,5	2165	33,5	2545	35	2750	35	3070	36	3170	38,5
65	349	89	407	95	468	98	536	110	572	110	672	115	726	115	811	118	837	126
5	1360	27,5	1620	29,5	1870	30,5	2140	34	2300	34	2680	36	2880	36	3230	37,5	3300	39,5
73	359	90	428	97	494	100	565	112	608	112	708	118	761	118	853	123	872	130
5,5	1460	28	1700	30	1960	31	2240	35	2400	35	2810	36,5	3010	36,5	3360	38	3430	40
80	386	92	449	98	518	102	592	115	634	115	742	120	795	120	888	125	906	131

Standard Ø: Diameter range

(Sprinkler at 1m height)

- For optimum distribution avoid use in shady areas.
- Sprinklers will be supplied with standard nozzles unless otherwise specified.
- In order to calculate the flow, add the flows of the two nozzles. The range of the rear nozzle must be less than that of the main nozzle.
- These results has been obtained at indoor laboratory with 0 m/seg win velocity. Outdoor results may change range distances.

