

## Horizontal Metal Filters







### DISC & SCREEN YE, YD

#### GENERAL CHARACTERISTICS

Body Material: S195T  
 Cartridge Material: PP (Disc) PA (Screen SS 304 Cage PA)  
 Maximum Working Pressure: 8 Bar (116 PSI)  
 Maximum Working Temperature: 60 °C / 140 °F  
 Filtration Degree: 20-50-100-130 Micron  
 Filter Cartridge: D: Disc Cartridge E: Screen Cartridge  
 Painting Method: Electrostatic Powder Coating  
 Paint Material: Epoxy Polyester

CODE	D	D1	M	T	K	H	FLOW RATE		WEIGHT
	inch				mm		m <sup>3</sup> /h	Usgpm	kg
YE20	2	6	¼	½	515	240	30	132	12
YE25	2½	6	¼	½	570	360	35	154	14,6
YE30	3	6	¼	½	570	480	45	198	18
YE40	4	8	¼	½	670	605	75	330	28
YE50	5	10	¼	1	900	700	140	616	51
YE60	6	10	¼	1	1100	1000	180	792	88
YE80	8	12	¼	1	1200	1200	280	1232	115
YDS20	2	6	¼	½	520	400	30	132	16
YD25	2½	8	¼	¾	590	400	35	154	20
YD30	3	8	¼	¾	590	515	45	198	24
YD40	4	8	¼	¾	670	625	70	308	29

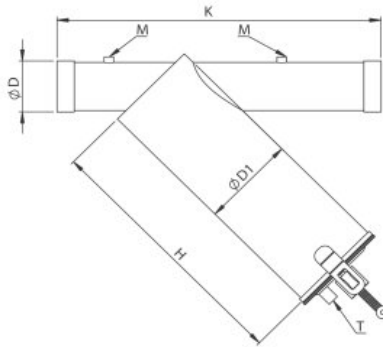

CODE	D	D1	T	T1	K	A	H				
	inch				mm	inch	mm	inch	mm	mm	
2020	2	11	¼	½	110	4,3	250	9,8	1185	46,7	1305
2025	2½	11	1	½	102	4	300	11,8	1255	49,4	1385
2030	3	11	1	½	95	3,7	300	11,8	1250	49,2	1385
2040	4	11	1	½	82,5	3,2	300	11,8	1235	48,6	1385
2040S	4	13	2	¾	102,5	4	350	13,8	1280	50,4	1430
2050	5	15	2	1	120	4,7	400	15,7	1520	59,8	1745
2060	6	18	2	1	142,5	5,6	450	17,7	1750	68,9	2035

www.famcocorp.com

E-mail: info@famcocorp.com

@famco\_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲