

ASTRA


DDA 100-100

ARGALAIR



PVDF $+80^{\circ}$ -10° 6,3 Kg + 0,4 Kg
Pump Packaging

PP $+60^{\circ}$ -5° 5,3 Kg + 0,4 Kg
Pump Packaging

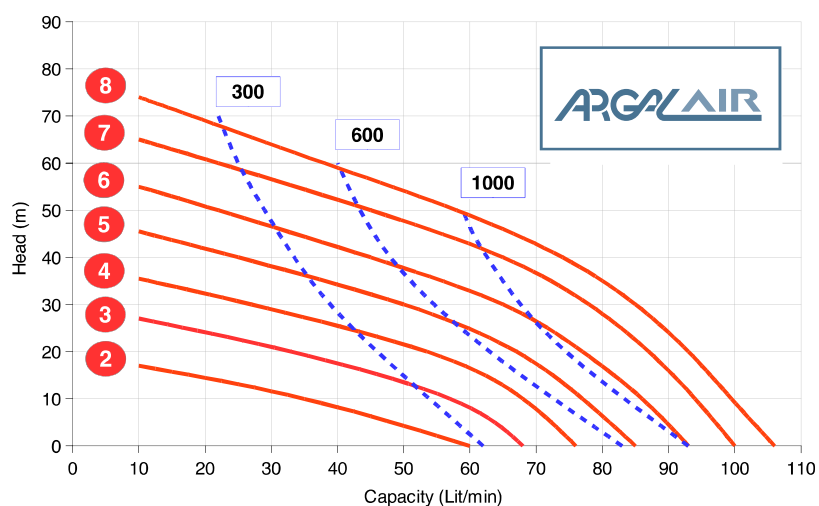


bar Air Pressure main supply **NI/min** Air consumption

TECHNICAL DATA

Fluid connections	1" BSP • NPT* • FLANGED* DN25
Air connection	3/8" BSP
Max flow rate	100 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	6 mca
Max suction lift wet	9,8 mca
Max size solids	3,5 mm
Noise level	72 dB(A)
Max viscosity	25.000 cPs

DIMENSIONS (mm)

PP	A 265 B 175 C 245
PVDF	A 265 B 175 C 245

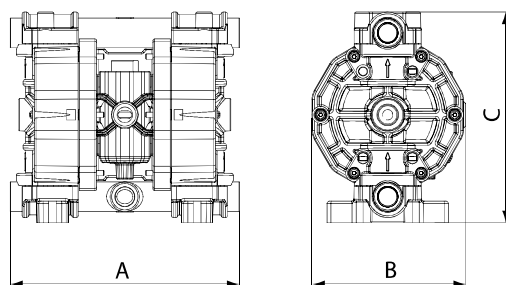

COMPOSITION

Wetted parts	• PP • PVDF
Diaphragms	• HYTREL + PTFE • SANTOPRENE + PTFE • HYTREL • SANTOPRENE • EPDM • NBR
Valve Balls	• PTFE • SS • EPDM • NBR
Valve Seats	• PP • PVDF • AISI 316 • UPPE
Gaskets	• EPDM • VITON • NBR • PTFE

Connections scheme page 28

* Optional