


ASTRA

DDA 150-500




PP Pump Packaging	PVDF Pump Packaging	Alu Pump Packaging	AISI 316 Pump Packaging
--	--	---	--

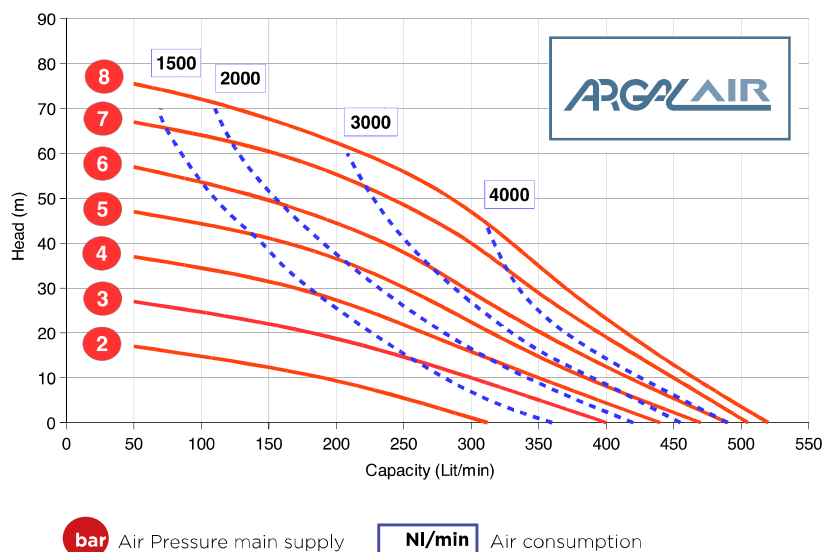

TECHNICAL DATA

Fluid connections	1½" BSP • NPT* • FLANGED* DN40
Air connection	¾" BSP
Max flow rate	500 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	5 mca
Max suction lift wet	9,8 mca
Max size solids	8,5 mm
Noise level	78 dB(A)
Max viscosity	50.000 cPs

DIMENSIONS (mm)		
PP	A 595 B 345 C 565	
PVDF	A 595 B 345 C 565	
ALU	A 595 B 345 C 560	
AISI 316	A 582 B 345 C 570	

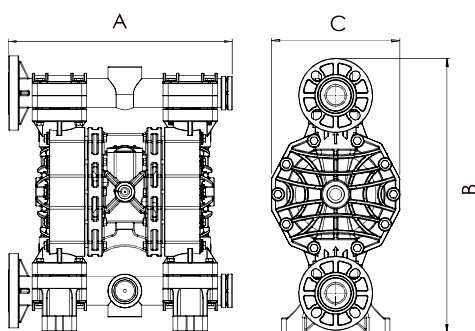

COMPOSITION

Wetted parts	• PP • PVDF • ALU • AISI 316
Diaphragms	• HYTREL + PTFE • SANTOPRENE + PTFE • HYTREL • SANTOPRENE • EPDM • NBR
Valve Balls	• PTFE • AISI 316 • EPDM • NBR
Valve Seats	• PP • PVDF • ALU • AISI 316 • UPPE
Gaskets	• EPDM • VITON • NBR • PTFE

Connections scheme page 28

* Optional