


ASTRA

DDA 200-650


ARGALAIR

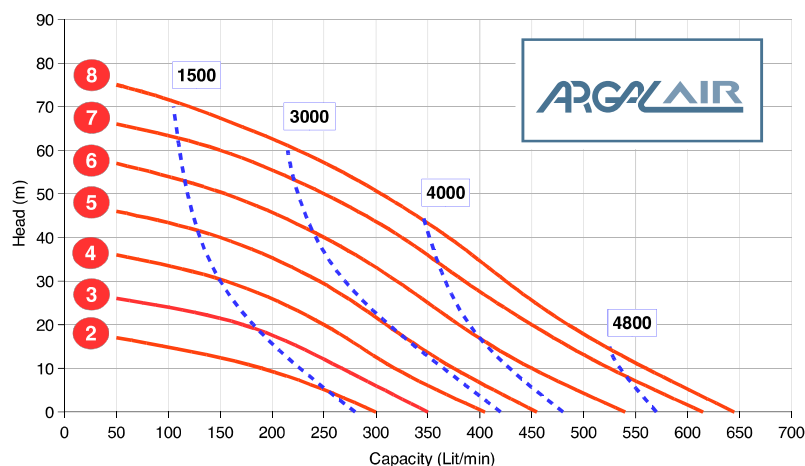

bar Air Pressure main supply **NI/min** Air consumption

TECHNICAL DATA	
Fluid connections	2" BSP • NPT* • FLANGED* DN50
Air connection	3/4" BSP
Max flow rate	650 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	5 mca
Max suction lift wet	9,8 mca
Max size solids	38,55 mm
Noise level	78 dB(A)
Max viscosity	50.000 cPs

DIMENSIONS (mm)	
PP	A 595 B 345 C 565
PVDF	A 595 B 345 C 565
ALU	A 595 B 345 C 560
AISI 316	A 487 B 345 C 599

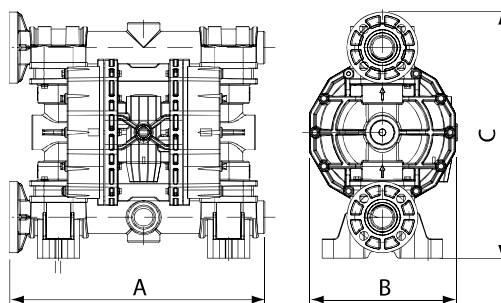

COMPOSITION	
Wetted parts	• PP • PVDF • ALU • AISI 316
Diaphragms	• HYTREL + PTFE • SANTOPRENE + PTFE • HYTREL • SANTOPRENE • EPDM • NBR
Valve Balls	• PTFE • AISI 316 • EPDM • NBR
Valve Seats	• PP • PVDF • ALU • AISI 316 • UPPE
Gaskets	• EPDM • VITON • NBR • PTFE

Connections scheme page 28

* Optional