

ASTRA COMPACT

DDA 25-09


ARGALAIR



PP **Pump Packaging**


POMc **Pump Packaging**

PVDF **Pump Packaging**

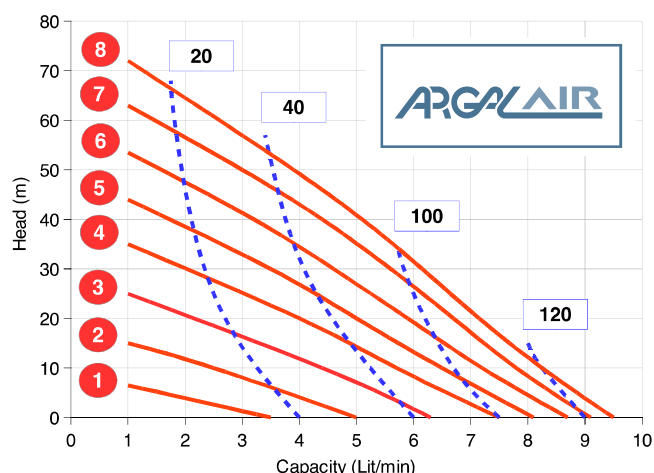

Air Pressure main supply Air consumption

TECHNICAL DATA	
Fluid connections	1/4" BSP • NPT*
Air connection	4 mm
Max flow rate	9 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	3 mca
Max suction lift wet	9,8 mca
Max size solids	2,5 mm
Noise level	62 dB(A)
Max viscosity	6.000 cPs

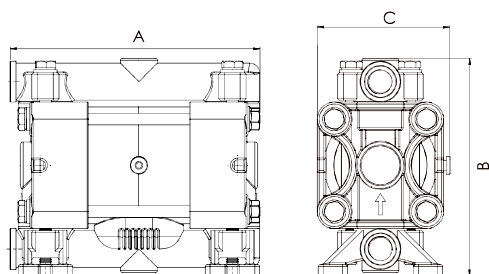

DIMENSIONS (mm)	
PP	A 129 B 112 C 68
PVDF	A 129 B 112 C 68
POMc	A 129 B 112 C 68

Connections scheme page 28

* Optional

COMPOSITION	
Wetted parts	• PP • PVDF • POMc
Diaphragms	• NBR+PTFE
Valve Balls	• PTFE • AISI 316
Valve Seats	• PP • PVDF • POMc
Gaskets	• EPDM • VITON • NBR • PTFE