


ASTRA COMPACT

DDA 38-18



PVDF Pump Packaging	PP Pump Packaging	AISI 316 Pump Packaging	POMc Pump Packaging
--	--	--	--

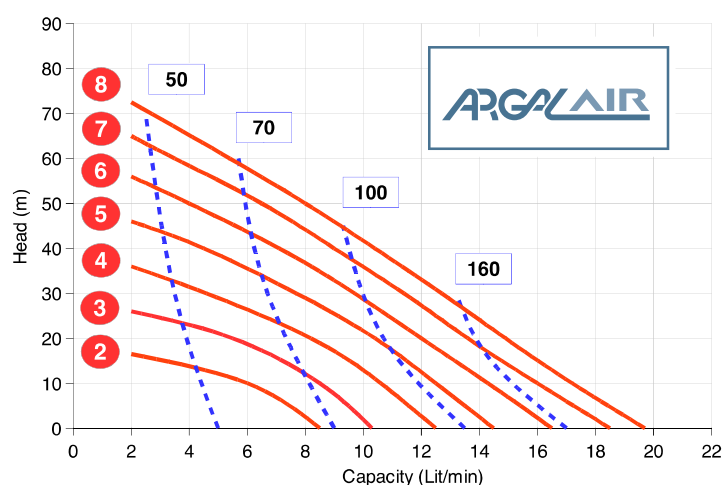


Air Pressure main supply Air consumption

TECHNICAL DATA

Fluid connections	3/8" BSP • NPT*
Air connection	6 mm
Max flow rate	18 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	6 mca
Max suction lift wet	9,8 mca
Max size solids	3 mm
Noise level	65 dB(A)
Max viscosity	12.000 cPs

DIMENSIONS (mm)

PP	A 146 B 96 C 164
PVDF	A 146 B 96 C 164
POMc	A 146 B 96 C 164
AISI 316	A 148 B 92 C 153

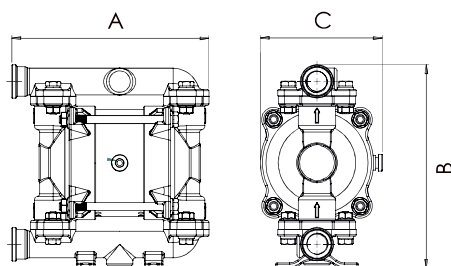

COMPOSITION

Wetted parts	• PP • PVDF • POMc • AISI 316
Diaphragms	• HYTREL + PTFE • SANTOPRENE + PTFE • HYTREL • SANTOPRENE
Valve Balls	• PTFE • AISI 316
Valve Seats	• PP • PVDF • POMc • AISI 316
Gaskets	• EPDM • VITON • NBR • PTFE

Connections scheme page 28

* Optional