


ASTRA COMPACT

DDA 50-30

ARGALAIR



PP Pump Packaging	PVDF Pump Packaging	POMc Pump Packaging	AISI 316 Pump Packaging
--	--	--	--

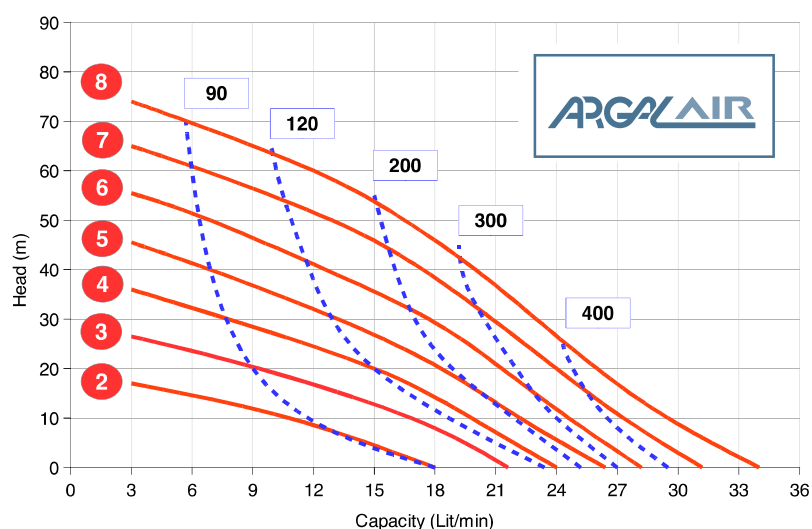


Air Pressure main supply Air consumption

TECHNICAL DATA

Fluid connections	½" BSP • NPT* • FLANGED* DN15
Air connection	6 mm
Max flow rate	30 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	5 mca
Max suction lift wet	9,8 mca
Max size solids	3,5 mm
Noise level	65 dB(A)
Max viscosity	15.000 cPs

DIMENSIONS (mm)

PP	A 177 B 105 C 183
PVDF	A 177 B 105 C 183
POMc	A 177 B 105 C 183
AISI 316	A 182 B 104 C 190

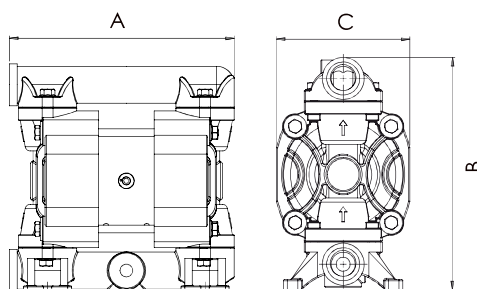

COMPOSITION

Wetted parts	• PP • PVDF • POMc • AISI 316
Diaphragms	• HYTREL + PTFE • SANTOPRENE + PTFE • HYTREL • SANTOPRENE
Valve Balls	• PTFE • AISI 316 • EPDM • NBR
Valve Seats	• PP • PVDF • POMc • AISI 316 • UPPE
Gaskets	• EPDM • VITON • NBR • PTFE

Connections scheme page 28

* Optional