


ASTRA COMPACT

DDA 50-50



PVDF Pump Packaging 4,3 Kg + 0,3 Kg	Alu Pump Packaging 4,2 Kg + 0,3 Kg	AISI 316 Pump Packaging 6 Kg + 0,3 Kg	PP Pump Packaging 3,6 Kg + 0,3 Kg
---	--	---	---

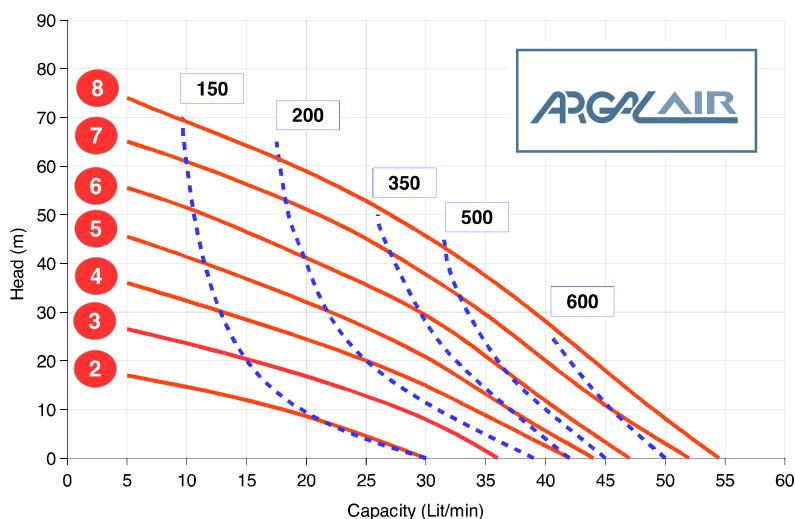


bar Air Pressure main supply **NI/min** Air consumption

TECHNICAL DATA

Fluid connections	½" BSP • NPT* • FLANGED* DN15
Air connection	¼" BSP
Max flow rate	50 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	6 mca
Max suction lift wet	9,8 mca
Max size solids	3,5 mm
Noise level	68 dB(A)
Max viscosity	20.000 cPs

DIMENSIONS (mm)

PP	A 222 B 156 C 233
PVDF	A 222 B 156 C 233
ALU	A 225 B 156 C 230
AISI 316	A 225 B 156 C 230

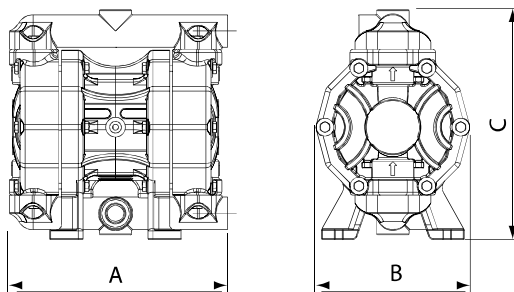

COMPOSITION

Wetted parts	• PP • PVDF • ALU • AISI 316
Diaphragms	• HYTREL + PTFE • SANTOPRENE + PTFE • HYTREL • SANTOPRENE
Valve Balls	• PTFE • AISI 316 • EPDM • NBR
Valve Seats	• PP • PVDF • ALU • AISI 316 • UPPE
Gaskets	• EPDM • VITON • NBR • PTFE

Connections scheme page 28

* Optional