



ASTRA

DDA 50-65

ARGALAIR

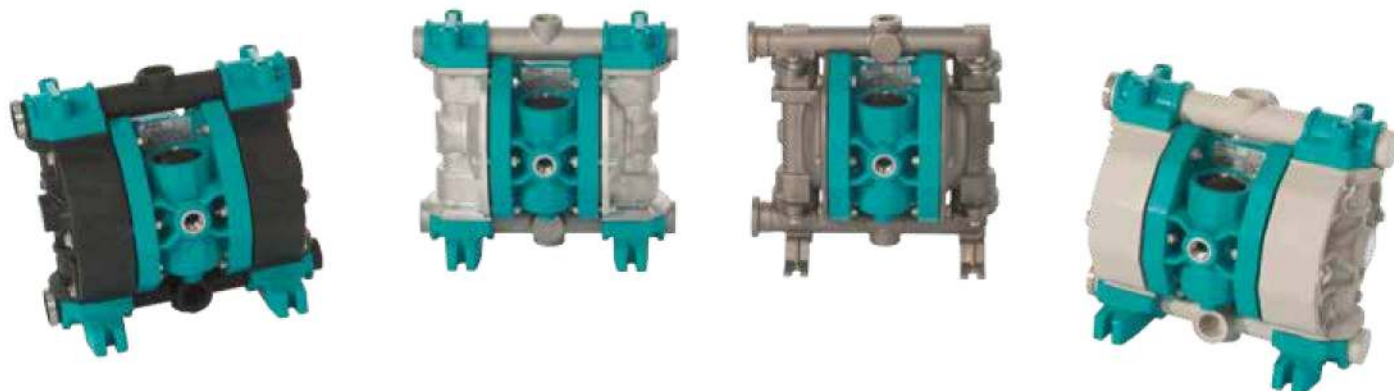

PVDF Pump Packaging 6,1 Kg + 0,4 Kg	Alu Pump Packaging 5,5 Kg + 0,4 Kg	AISI 316 Pump Packaging 7,8 Kg + 0,4 Kg	PP Pump Packaging 5,3 Kg + 0,4 Kg
---	--	---	---


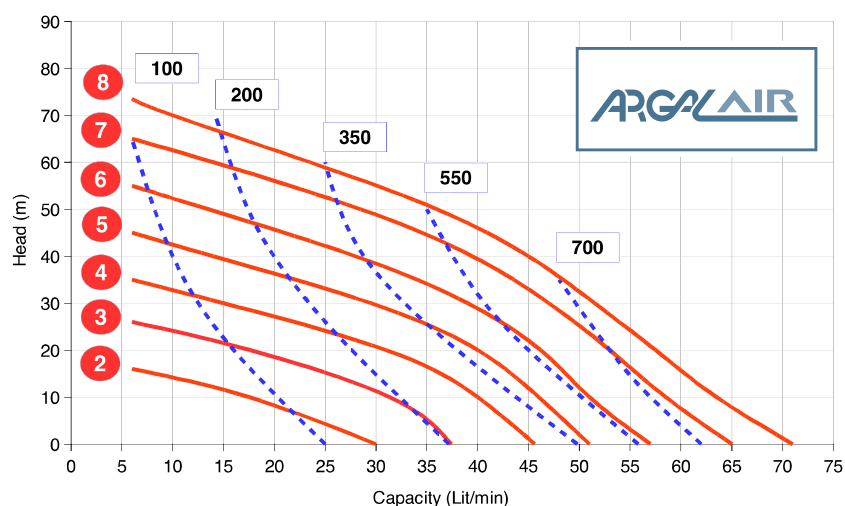


bar Air Pressure main supply **NI/min** Air consumption

TECHNICAL DATA

Fluid connections	½" BSP • NPT* • FLANGED* DN15
Air connection	¾" BSP
Max flow rate	65 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	6 mca
Max suction lift wet	9,8 mca
Max size solids	3,5 mm
Noise level	72 dB(A)
Max viscosity	25.000 cPs

DIMENSIONS (mm)		
PP	A 265 B 175 C 245	
PVDF	A 265 B 175 C 245	
ALU	A 265 B 175 C 245	
AISI 316	A 250 B 175 C 250	



COMPOSITION

Wetted parts	• PP • PVDF • ALU • AISI 316
Diaphragms	• HYTREL + PTFE • SANTOPRENE + PTFE • HYTREL • SANTOPRENE • EPDM • NBR
Valve Balls	• PTFE • AISI 316 • EPDM • NBR
Valve Seats	• PP • PVDF • ALU • AISI 316 • UPPE
Gaskets	• EPDM • VITON • NBR • PTFE

Connections scheme page 28

* Optional