



ASTRA

DDA 75-100

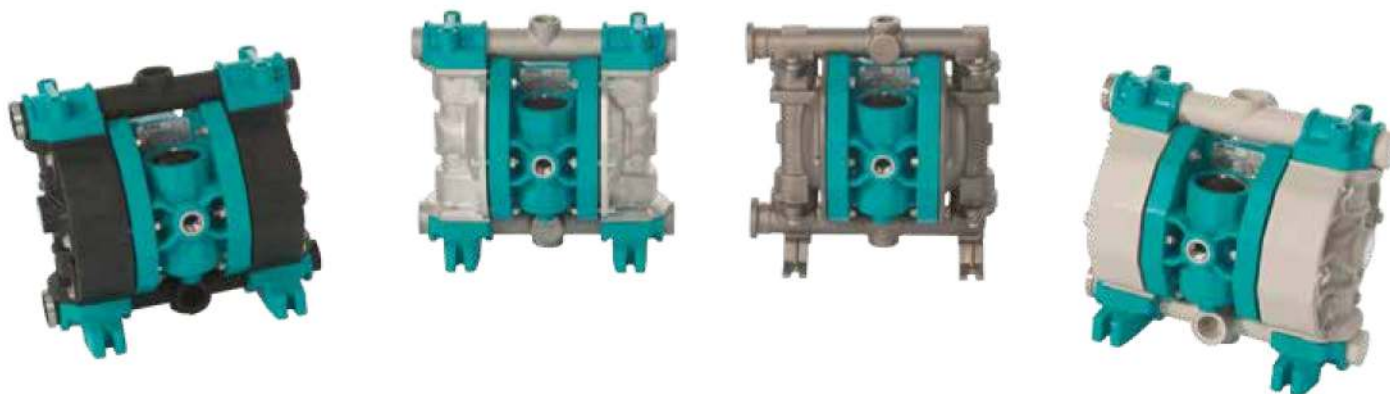

PVDF 6,2 Kg + 0,4 Kg Pump Packaging	Alu 5,7 Kg + 0,4 Kg Pump Packaging	AISI 316 7,8 Kg + 0,4 Kg Pump Packaging	PP 5,4 Kg + 0,4 Kg Pump Packaging
--	---	--	--

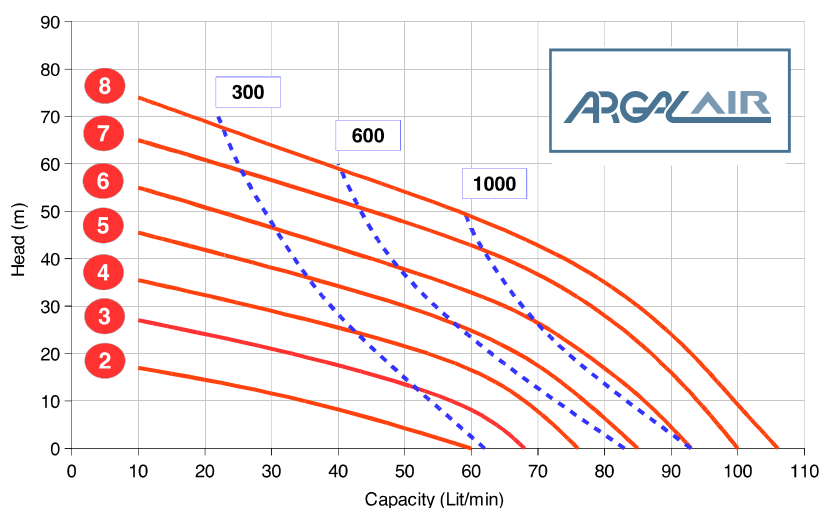


bar Air Pressure main supply **Nl/min** Air consumption

TECHNICAL DATA

Fluid connections	3/4" BSP • NPT* • FLANGED* DN20
Air connection	3/8" BSP
Max flow rate	100 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	6 mca
Max suction lift wet	9,8 mca
Max size solids	3,5 mm
Noise level	72 dB(A)
Max viscosity	25.000 cPs

DIMENSIONS (mm)	
PP	A 265 B 175 C 245
PVDF	A 265 B 175 C 245
ALU	A 265 B 175 C 245
AISI 316	A 250 B 175 C 250

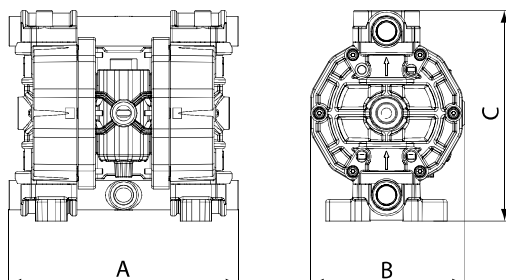

COMPOSITION	
Wetted parts	- PP • PVDF - ALU • AISI 316
Diaphragms	- HYTREL + PTFE - SANTOPRENE + PTFE - HYTREL - SANTOPRENE - EPDM • NBR
Valve Balls	- PTFE • AISI 316 - EPDM • NBR
Valve Seats	- PP • PVDF • ALU - AISI 316 • UPPE
Gaskets	- EPDM • VITON - NBR • PTFE

Connections scheme page 28

* Optional