


PUMP

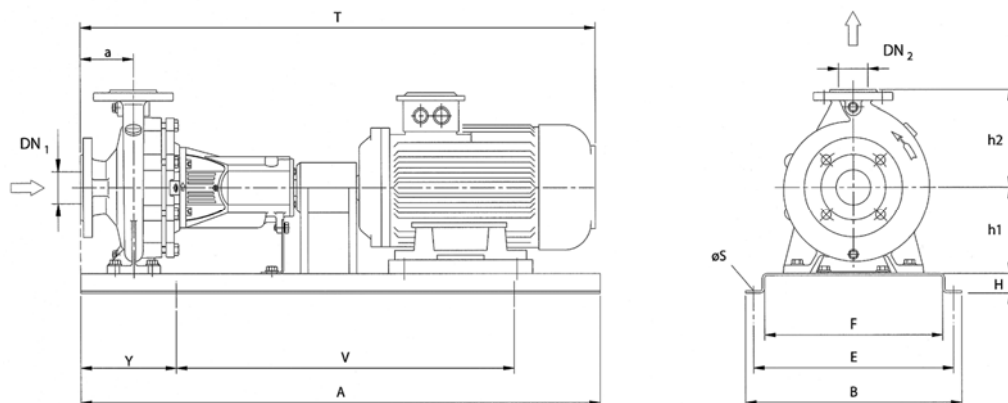

Dimension table 32 - 40 - 50

Model	Motor		Dimensions [mm]														
	[Kw] 4 poles	MEC	Standard coupling														
			DN2	DN1	a	h2	h1	A	B	F	Y	V	E	H	S	T	[kgf]
ENR 32-125	0,37	71	32	50	80	140	112	900	390	300	150	600	350	50	18	714	70,0
ENR 32-125	0,55	80	32	50	80	140	112	900	390	300	150	600	350	50	18	714	70,0
ENR 32-125	0,75	80	32	50	80	140	112	900	390	300	150	600	350	50	18	714	70,0
ENR 32-160	0,37	71	32	50	80	160	132	900	390	300	150	600	350	50	18	714	71,0
ENR 32-160	0,55	80	32	50	80	160	132	900	390	300	150	600	350	50	18	714	71,0
ENR 32-160	0,75	80	32	50	80	160	132	900	390	300	150	600	350	50	18	714	71,0
ENR 32-200	0,55	80	32	50	80	180	160	900	390	300	150	600	350	50	18	714	79,0
ENR 32-200	0,75	80	32	50	80	180	160	900	390	300	150	600	350	50	18	714	79,0
ENR 32-200	1,1	90S	32	50	80	180	160	900	390	300	150	600	350	50	18	764	82,0
ENR 32-200	1,5	90L	32	50	80	180	160	900	390	300	150	600	350	50	18	764	84,0
ENR 32-250	0,75	80	32	50	100	225	180	900	490	380	150	600	440	50	18	734	95,0
ENR 32-250	1,1	90S	32	50	100	225	180	900	490	380	150	600	440	50	18	784	98,0
ENR 32-250	1,5	90L	32	50	100	225	180	900	490	380	150	600	440	50	18	784	100,0
ENR 32-250	2,2	100L	32	50	100	225	180	900	490	380	150	600	440	50	18	864	111,0
ENR 32-250	3	100L	32	50	100	225	180	900	490	380	150	600	440	50	18	864	111,0
ENR 40-125	0,37	71	40	65	80	140	112	900	390	300	150	600	350	50	18	714	71,0
ENR 40-125	0,55	80	40	65	80	140	112	900	390	300	150	600	350	50	18	714	71,0
ENR 40-125	0,75	80	40	65	80	140	112	900	390	300	150	600	350	50	18	714	71,0
ENR 40-160	0,37	71	40	65	80	160	132	900	390	300	150	600	350	50	18	714	77,0
ENR 40-160	0,55	80	40	65	80	160	132	900	390	300	150	600	350	50	18	714	77,0
ENR 40-160	0,75	80	40	65	80	160	132	900	390	300	150	600	350	50	18	714	77,0
ENR 40-160	1,1	90S	40	65	80	160	132	900	390	300	150	600	350	50	18	764	80,0
ENR 40-160	1,5	90L	40	65	80	160	132	900	390	300	150	600	350	50	18	764	82,0
ENR 40-200	0,55	80	40	65	100	180	160	900	490	380	150	600	440	50	18	734	84,0
ENR 40-200	0,75	80	40	65	100	180	160	900	490	380	150	600	440	50	18	734	84,0
ENR 40-200	1,1	90S	40	65	100	180	160	900	490	380	150	600	440	50	18	784	87,0
ENR 40-200	1,5	90L	40	65	100	180	160	900	490	380	150	600	440	50	18	784	89,0
ENR 40-250	1,1	90S	40	65	100	225	180	900	490	380	150	600	440	50	18	784	98,0
ENR 40-250	1,5	90L	40	65	100	225	180	900	490	380	150	600	440	50	18	784	100,0
ENR 40-250	2,2	100L	40	65	100	225	180	900	490	380	150	600	440	50	18	864	111,0
ENR 40-250	3	100L	40	65	100	225	180	900	490	380	150	600	440	50	18	864	111,0
ENR 40-315	2,2	100L	40	65	125	250	225	1120	610	480	190	740	550	50	22	999	171,0
ENR 40-315	3	100L	40	65	125	250	225	1120	610	480	190	740	550	50	22	999	171,0
ENR 40-315	4	112	40	65	125	250	225	1120	610	480	190	740	550	50	22	999	178,0
ENR 40-315	5,5	132S	40	65	125	250	225	1120	610	480	190	740	550	50	22	1081	189,0
ENR 50-125	0,37	71	50	65	100	160	132	900	390	300	150	600	350	50	18	734	77,0
ENR 50-125	0,55	80	50	65	100	160	132	900	390	300	150	600	350	50	18	734	77,0
ENR 50-125	0,75	80	50	65	100	160	132	900	390	300	150	600	350	50	18	734	77,0
ENR 50-125	1,1	90S	50	65	100	160	132	900	390	300	150	600	350	50	18	784	80,0
ENR 50-160	0,55	80	50	65	100	180	160	900	490	380	150	600	440	50	18	734	82,0
ENR 50-160	0,75	80	50	65	100	180	160	900	490	380	150	600	440	50	18	734	82,0
ENR 50-160	1,1	90S	50	65	100	180	160	900	490	380	150	600	440	50	18	784	85,0
ENR 50-160	2,2	100L	50	65	100	180	160	900	490	380	150	600	440	50	18	864	97,0

Dimension table 50 - 65 - 80


Model	Motor		Dimensions [mm]														[kgf]
	[Kw] 4 poles	MEC	DN2	DN1	a	h2	h1	A	B	F	Y	V	E	H	S	T	
ENR 50-200	1,1	90S	50	65	100	200	160	900	490	380	150	600	440	50	18	784	89,0
ENR 50-200	1,5	90L	50	65	100	200	160	900	490	380	150	600	440	50	18	784	92,0
ENR 50-200	2,2	100L	50	65	100	200	160	900	490	380	150	600	440	50	18	864	102,0
ENR 50-200	3	100L	50	65	100	200	160	900	490	380	150	600	440	50	18	864	102,0
ENR 50-200	4	112	50	65	100	200	160	900	490	380	150	600	440	50	18	864	109,0
ENR 50-250	1,5	90L	50	65	100	225	180	900	490	380	150	600	440	50	18	784	107,0
ENR 50-250	2,2	100L	50	65	100	225	180	900	490	380	150	600	440	50	18	864	117,0
ENR 50-250	3	100L	50	65	100	225	180	900	490	380	150	600	440	50	18	864	117,0
ENR 50-250	4	112	50	65	100	225	180	900	490	380	150	600	440	50	18	864	123,0
ENR 50-250	5,5	132S	50	65	100	225	180	900	490	380	150	600	440	50	18	946	138,0
ENR 50-315	3	100L	50	65	125	280	225	1120	610	480	190	740	550	50	22	999	171,0
ENR 50-315	4	112	50	65	125	280	225	1120	610	480	190	740	550	50	22	999	178,0
ENR 50-315	5,5	132S	50	65	125	280	225	1120	610	480	190	740	550	50	22	1081	189,0
ENR 50-315	7,5	132M	50	65	125	280	225	1120	610	480	190	740	550	50	22	1081	199,0
ENR 65-125	0,55	80	65	80	100	180	160	900	490	380	150	600	440	50	18	734	80,0
ENR 65-125	0,75	80	65	80	100	180	160	900	490	380	150	600	440	50	18	734	80,0
ENR 65-125	1,1	90S	65	80	100	180	160	900	490	380	150	600	440	50	18	784	83,0
ENR 65-160	0,75	80	65	80	100	200	160	900	490	380	150	600	440	50	18	734	85,0
ENR 65-160	1,1	90S	65	80	100	200	160	900	490	380	150	600	440	50	18	784	88,0
ENR 65-160	1,5	90L	65	80	100	200	160	900	490	380	150	600	440	50	18	784	90,0
ENR 65-160	2,2	100L	65	80	100	200	160	900	490	380	150	600	440	50	18	864	100,0
ENR 65-200	1,1	90S	65	80	100	225	180	900	490	380	150	600	440	50	18	784	98,0
ENR 65-200	1,5	90L	65	80	100	225	180	900	490	380	150	600	440	50	18	784	100,0
ENR 65-200	2,2	100L	65	80	100	225	180	900	490	380	150	600	440	50	18	864	110,0
ENR 65-200	3	100L	65	80	100	225	180	900	490	380	150	600	440	50	18	864	110,0
ENR 65-200	4	112	65	80	100	225	180	900	490	380	150	600	440	50	18	864	116,0
ENR 65-200	5,5	132S	65	80	100	225	180	900	490	380	150	600	440	50	18	946	131,0
ENR 65-250	2,2	100L	65	80	100	250	200	1120	610	480	190	740	550	50	22	974	163,0
ENR 65-250	3	100L	65	80	100	250	200	1120	610	480	190	740	550	50	22	974	163,0
ENR 65-250	4	112	65	80	100	250	200	1120	610	480	190	740	550	50	22	974	169,0
ENR 65-250	5,5	132S	65	80	100	250	200	1120	610	480	190	740	550	50	22	1056	184,0
ENR 65-250	7,5	132M	65	80	100	250	200	1120	610	480	190	740	550	50	22	1056	194,0
ENR 65-315	5,5	132S	65	80	125	280	225	1120	610	480	190	740	550	50	22	1081	203,0
ENR 65-315	7,5	132M	65	80	125	280	225	1120	610	480	190	740	550	50	22	1081	211,0
ENR 65-315	11	160M	65	80	125	280	225	1400	610	480	230	940	550	75	26	1247	254,0
ENR 65-315	15	160L	65	80	125	280	225	1400	610	480	230	940	550	75	26	1247	268,0
ENR 80-160	0,75	80	80	100	125	225	180	900	490	380	150	600	440	50	18	759	90,0
ENR 80-160	1,1	90S	80	100	125	225	180	900	490	380	150	600	440	50	18	809	93,0
ENR 80-160	1,5	90L	80	100	125	225	180	900	490	380	150	600	440	50	18	809	95,0
ENR 80-160	2,2	100L	80	100	125	225	180	900	490	380	150	600	440	50	18	889	105,0
ENR 80-160	3	100L	80	100	125	225	180	900	490	380	150	600	440	50	18	889	105,0
ENR 80-160	4	112	80	100	125	225	180	900	490	380	150	600	440	50	18	889	112,0
ENR 80-200	2,2	100L	80	100	125	250	180	1120	610	480	190	740	550	50	22	999	152,0
ENR 80-200	3	100L	80	100	125	250	180	1120	610	480	190	740	550	50	22	999	152,0
ENR 80-200	4	112	80	100	125	250	180	1120	610	480	190	740	550	50	22	999	159,0
ENR 80-200	5,5	132S	80	100	125	250	180	1120	610	480	190	740	550	50	22	1081	170,0
ENR 80-250	3	100L	80	100	125	280	200	1120	610	480	190	740	550	50	22	999	167,0
ENR 80-250	4	112	80	100	125	280	200	1120	610	480	190	740	550	50	22	999	174,0
ENR 80-250	5,5	132S	80	100	125	280	200	1120	610	480	190	740	550	50	22	1081	185,0
ENR 80-250	7,5	132M	80	100	125	280	200	1120	610	480	190	740	550	50	22	1081	193,0
ENR 80-250	11	160M	80	100	125	280	200	1400	610	480	230	940	550	75	26	1247	236,0
ENR 80-315	5,5	132S	80	100	125	315	250	1120	610	480	190	740	550	50	22	1081	196,0
ENR 80-315	7,5	132M	80	100	125	315	250	1120	610	480	190	740	550	50	22	1081	204,0
ENR 80-315	11	160M	80	100	125	315	250	1400	610	480	230	940	550	75	26	1247	248,0
ENR 80-315	15	160L	80	100	125	315	250	1400	610	480	230	940	550	75	26	1247	262,0
ENR 80-315	18,5	180M	80	100	125	315	250	1400	610	480	230	940	550	75	26	1285	286,0
ENR 80-315	22	180L	80	100	125	315	250	1400	610	480	230	940	550	75	26	1322	325,0
ENR 80-315	30	200L	80	100	125	315	250	1400	730	600	230	940	670	75	26	1322	364,0

Dimension table 80 - 100 - 125 - 150

Model	Motor		Dimensions [mm]														[kgf]
	[Kw] 4 poles	MEC	DN2	DN1	a	h2	h1	A	B	F	Y	V	E	H	S	T	
ENR 80-400	11	160M	80	125	125	355	280	1400	610	480	230	940	550	75	26	1307	356,0
ENR 80-400	15	160L	80	125	125	355	280	1400	610	480	230	940	550	75	26	1307	369,0
ENR 80-400	18,5	180M	80	125	125	355	280	1400	610	480	230	940	550	75	26	1345	392,0
ENR 80-400	22	180L	80	125	125	355	280	1400	610	480	230	940	550	75	26	1382	428,0
ENR 80-400	30	200L	80	125	125	355	280	1400	730	600	230	940	670	75	26	1382	452,0
ENR 100-160	2,2	100L	100	125	125	280	200	1120	610	480	190	740	550	50	22	999	155,0
ENR 100-160	3	100L	100	125	125	280	200	1120	610	480	190	740	550	50	22	999	155,0
ENR 100-160	4	112	100	125	125	280	200	1120	610	480	190	740	550	50	22	999	162,0
ENR 100-160	5,5	132S	100	125	125	280	200	1120	610	480	190	740	550	50	22	1081	173,0
ENR 100-200	2,2	100L	100	125	125	280	200	1120	610	480	190	740	550	50	22	999	159,0
ENR 100-200	3	100L	100	125	125	280	200	1120	610	480	190	740	550	50	22	999	159,0
ENR 100-200	4	112	100	125	125	280	200	1120	610	480	190	740	550	50	22	999	165,0
ENR 100-200	5,5	132S	100	125	125	280	200	1120	610	480	190	740	550	50	22	1081	176,0
ENR 100-200	7,5	132M	100	125	125	280	200	1120	610	480	190	740	550	50	22	1081	186,0
ENR 100-250	4	112	100	125	140	280	225	1120	610	480	190	740	550	50	22	1014	190,0
ENR 100-250	5,5	132S	100	125	140	280	225	1120	610	480	190	740	550	50	22	1096	201,0
ENR 100-250	7,5	132M	100	125	140	280	225	1120	610	480	190	740	550	50	22	1096	209,0
ENR 100-250	11	160M	100	125	140	280	225	1400	610	480	230	940	550	75	26	1262	252,0
ENR 100-250	15	160L	100	125	140	280	225	1400	610	480	230	940	550	75	26	1262	266,0
ENR 100-315	11	160M	100	125	140	315	250	1400	610	480	230	940	550	75	26	1262	270,0
ENR 100-315	15	160L	100	125	140	315	250	1400	610	480	230	940	550	75	26	1262	284,0
ENR 100-315	18,5	180M	100	125	140	315	250	1400	610	480	230	940	550	75	26	1300	309,0
ENR 100-315	22	180L	100	125	140	315	250	1400	610	480	230	940	550	75	26	1337	347,0
ENR 100-315	30	200L	100	125	140	315	250	1400	730	600	230	940	670	75	26	1337	386,0
ENR 100-400	15	160L	100	125	140	355	280	1400	730	600	230	940	670	75	26	1322	373,0
ENR 100-400	18,5	180M	100	125	140	355	280	1400	730	600	230	940	670	75	26	1360	398,0
ENR 100-400	22	180L	100	125	140	355	280	1400	730	600	230	940	670	75	26	1397	436,0
ENR 100-400	30	200L	100	125	140	355	280	1400	730	600	230	940	670	75	26	1397	462,0
ENR 100-400	37	225S	100	125	140	355	280	1400	730	600	230	940	670	75	26	1504	503,0
ENR 100-400	45	225M	100	125	140	355	280	1400	730	600	230	940	670	75	26	1504	521,0
ENR 125-200	7,5	132M	125	150	140	315	250	1120	610	480	190	740	550	50	22	1096	223,0
ENR 125-200	11	160M	125	150	140	315	250	1400	610	480	230	940	550	75	26	1262	267,0
ENR 125-200	15	160L	125	150	140	315	250	1400	610	480	230	940	550	75	26	1262	281,0
ENR 125-250	7,5	132M	125	150	140	355	250	1120	610	480	190	740	550	50	22	1096	237,0
ENR 125-250	11	160M	125	150	140	355	250	1400	610	480	230	940	550	75	26	1262	281,0
ENR 125-250	15	160L	125	150	140	355	250	1400	610	480	230	940	550	75	26	1262	295,0
ENR 125-250	18,5	180M	125	150	140	355	250	1400	610	480	230	940	550	75	26	1300	319,0
ENR 125-250	22	180L	125	150	140	355	250	1400	610	480	230	940	550	75	26	1337	358,0
ENR 125-315	15	160L	125	150	140	355	280	1400	730	600	230	940	670	75	26	1322	352,0
ENR 125-315	18,5	180M	125	150	140	355	280	1400	730	600	230	940	670	75	26	1360	377,0
ENR 125-315	22	180L	125	150	140	355	280	1400	730	600	230	940	670	75	26	1397	415,0
ENR 125-315	30	200L	125	150	140	355	280	1400	730	600	230	940	670	75	26	1397	440,0
ENR 125-315	37	225S	125	150	140	355	280	1400	730	600	230	940	670	75	26	1504	482,0
ENR 125-400	30	200L	125	150	140	400	315	1400	730	600	230	940	670	75	26	1397	475,0
ENR 125-400	37	225S	125	150	140	400	315	1400	730	600	230	940	670	75	26	1504	516,0
ENR 125-400	45	225M	125	150	140	400	315	1400	730	600	230	940	670	75	26	1504	534,0
ENR 125-400	55	250M	125	150	140	400	315	1800	730	600	300	1200	670	100	26	1569	612,0
ENR 125-400	75	280S	125	150	140	400	315	1800	850	700	300	1200	780	100	26	1634	733,0
ENR 150-200	7,5	132M	150	200	160	400	280	1400	730	600	230	940	670	75	26	1116	303,0
ENR 150-200	11	160M	150	200	160	400	280	1400	730	600	230	940	670	75	26	1282	325,0
ENR 150-200	15	160L	150	200	160	400	280	1400	730	600	230	940	670	75	26	1282	338,0
ENR 150-200	18,5	180M	150	200	160	400	280	1400	730	600	230	940	670	75	26	1320	363,0
ENR 150-250	15	160L	150	200	160	400	280	1400	730	600	230	940	670	75	26	1282	370,0
ENR 150-250	18,5	180M	150	200	160	400	280	1400	730	600	230	940	670	75	26	1320	395,0
ENR 150-250	22	180L	150	200	160	400	280	1400	730	600	230	940	670	75	26	1357	433,0
ENR 150-250	30	200L	150	200	160	400	280	1400	730	600	230	940	670	75	26	1357	459,0
ENR 150-250	37	225S	150	200	160	400	280	1400	730	600	230	940	670	75	26	1464	500,0

Dimension table 150 - 200

Model	Motor		Dimensions [mm]															
	[Kw]	MEC						Standard Coupling										
	4 poles		DN2	DN1	a	h2	h1	A	B	F	Y	V	E	H	S	T	[kgf]	
ENR 150-315	18,5	180M	150	200	160	400	280	1400	730	600	230	940	670	75	26	1380	427,0	
ENR 150-315	22	180L	150	200	160	400	280	1400	730	600	230	940	670	75	26	1417	465,0	
ENR 150-315	30	200L	150	200	160	400	280	1400	730	600	230	940	670	75	26	1417	491,0	
ENR 150-315	37	225S	150	200	160	400	280	1800	730	600	300	1200	670	100	26	1524	567,0	
ENR 150-315	45	225M	150	200	160	400	280	1800	730	600	300	1200	670	100	26	1524	586,0	
ENR 150-315	55	250M	150	200	160	400	280	1800	730	600	300	1200	670	100	26	1589	628,0	
ENR 150-400	45	225M	150	200	160	450	315	1800	730	600	300	1200	670	100	26	1524	605,0	
ENR 150-400	55	250M	150	200	160	450	315	1800	730	600	300	1200	670	100	26	1589	647,0	
ENR 150-400	75	280S	150	200	160	450	315	1800	850	700	300	1200	780	100	26	1654	768,0	
ENR 150-400	90	280M	150	200	160	450	315	1800	850	700	300	1200	780	100	26	1654	837,0	
ENR 200-250	15	160L	200	200	160	400	280	1400	730	600	230	940	670	75	26	1402	425,0	
ENR 200-250	18,5	180M	200	200	160	400	280	1400	730	600	230	940	670	75	26	1440	450,0	
ENR 200-250	22	180L	200	200	160	400	280	1400	730	600	230	940	670	75	26	1477	488,0	
ENR 200-250	30	200L	200	200	160	400	280	1400	730	600	230	940	670	75	26	1477	514,0	

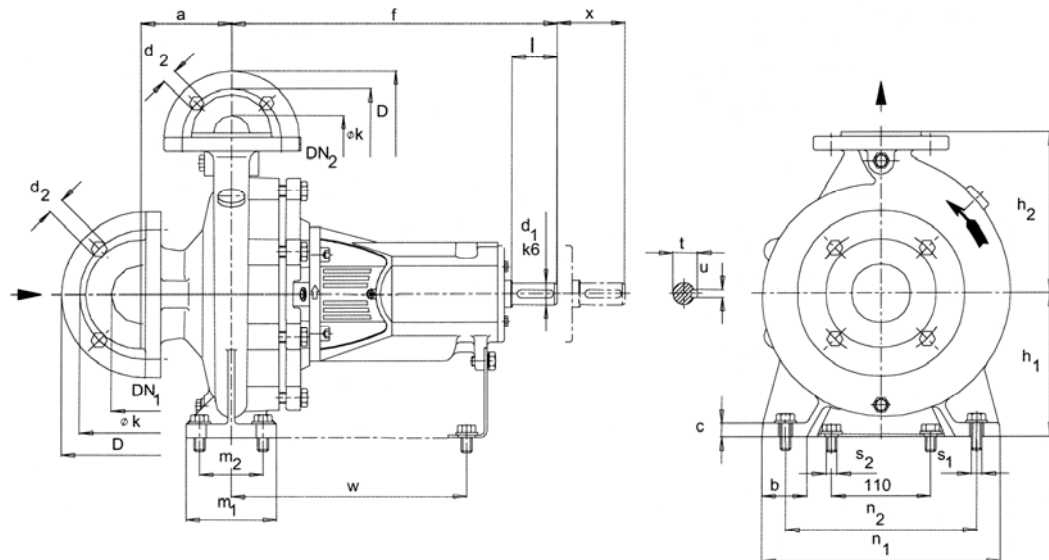

Model	Supp	Dimensions [mm]																				Weight [kgf]
		Pump						Support								Shaft protuberance						
		DN2	DN1	a	f	h2	h1	b	c	m1	m2	n1	n2	s1	s2	w	x	d1	l	t	u	
ENR 32-125	25	32	50	80	360	112	140	50	15	100	70	190	140	M12	M12	260	100	24	50	27	8	31,0
ENR 32-160	25	32	50	80	360	132	160	50	15	100	70	240	190	M12	M12	260	100	24	50	27	8	33,0
ENR 32-200	25	32	50	80	360	160	180	50	15	100	70	240	190	M12	M12	260	100	24	50	27	8	34,0
ENR 32-250	25	32	50	100	360	180	225	65	15	125	95	320	250	M12	M12	260	100	24	50	27	8	46,0
ENR 40-125	25	40	65	80	360	112	140	50	15	100	70	210	160	M12	M12	260	100	24	50	27	8	28,0
ENR 40-160	25	40	65	80	360	132	160	50	15	100	70	240	190	M12	M12	260	100	24	50	27	8	30,0
ENR 40-200	25	40	65	100	360	160	180	50	15	100	70	265	212	M12	M12	260	100	24	50	27	8	36,0
ENR 40-250	25	40	65	100	360	180	225	65	15	125	95	320	250	M12	M12	260	100	24	50	27	8	46,0
ENR 40-315	35	40	65	125	470	225	250	65	18	125	95	345	280	M12	M12	340	100	32	80	35	10	73,0
ENR 50-125	25	50	65	100	360	132	160	50	15	100	70	240	190	M12	M12	260	100	24	50	27	8	30,0
ENR 50-160	25	50	65	100	360	160	180	50	15	100	70	265	212	M12	M12	260	100	24	50	27	8	36,0
ENR 50-200	25	50	65	100	360	160	200	50	15	100	70	265	212	M12	M12	260	100	24	50	27	8	40,0
ENR 50-250	25	50	65	100	360	180	225	65	15	125	95	320	250	M12	M12	260	100	24	50	27	8	50,0
ENR 50-315	35	50	65	125	470	225	280	65	17	125	95	345	280	M12	M12	340	100	32	80	35	10	88,0
ENR 65-125	25	65	80	100	360	160	180	65	15	125	95	280	212	M12	M12	260	100	24	50	27	8	33,0
ENR 65-160	25	65	80	100	360	160	200	65	15	125	95	280	212	M12	M12	260	100	24	50	27	8	39,0
ENR 65-200	25	65	80	100	360	180	225	65	15	125	95	320	250	M12	M12	260	140	24	50	27	8	45,0
ENR 65-250	35	65	80	100	470	200	250	80	15	160	120	360	280	M16	M12	340	140	32	80	35	10	70,0
ENR 65-315	35	65	80	125	470	225	280	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	92,0
ENR 80-160	25	80	100	125	360	180	225	65	15	125	95	320	250	M12	M12	260	140	24	50	27	8	43,0
ENR 80-200	35	80	100	125	470	180	250	65	15	125	95	345	280	M12	M12	340	140	32	80	35	10	60,0
ENR 80-250	35	80	100	125	470	200	280	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	75,0
ENR 80-315	35	80	100	125	470	250	315	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	95,0
ENR 80-400	45	80	125	125	530	280	355	80	18	160	120	435	355	M16	M12	370	140	42	110	45	12	143,0
ENR 100-160	35	100	125	125	470	200	280	80	18	160	120	360	280	M16	M12	340	140	32	80	35	10	78,0
ENR 100-200	35	100	125	125	470	200	280	80	18	160	120	360	280	M16	M12	340	140	32	80	35	10	70,0
ENR 100-250	35	100	125	140	470	225	280	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	85,0
ENR 100-315	35	100	125	140	470	250	315	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	104,0
ENR 100-400	45	100	125	140	530	280	355	100	18	200	150	500	400	M20	M12	370	140	42	110	45	12	177,0
ENR 125-200	35	125	150	140	470	250	315	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	100,0
ENR 125-250	35	125	150	140	470	250	355	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	102,0
ENR 125-315	45	125	150	140	530	280	355	100	18	200	150	500	400	M20	M12	370	140	42	110	45	12	151,0
ENR 125-400	45	125	150	140	530	315	400	100	18	200	150	500	400	M20	M12	370	140	42	110	45	12	188,0
ENR 150-200	35	150	200	160	470	280	400	100	20	200	150	550	450	M20	M12	340	140	32	80	35	10	123,0
ENR 150-250	35	150	200	160	470	280	400	100	20	200	150	500	400	M20	M12	340	140	32	80	35	10	128,0
ENR 150-315	45	150	200	160	530	280	400	100	18	200	150	550	450	M20	M12	370	140	42	110	45	12	170,0
ENR 150-400	45	150	200	160	530	315	450	100	18	200	150	550	450	M20	M12	370	140	42	110	45	12	205,0
ENR 200-250	45	200	200	160	590	280	400	100	22	200	150	500	400	M20	M12	430	180	42	110	45	12	230,0