


FP-1200

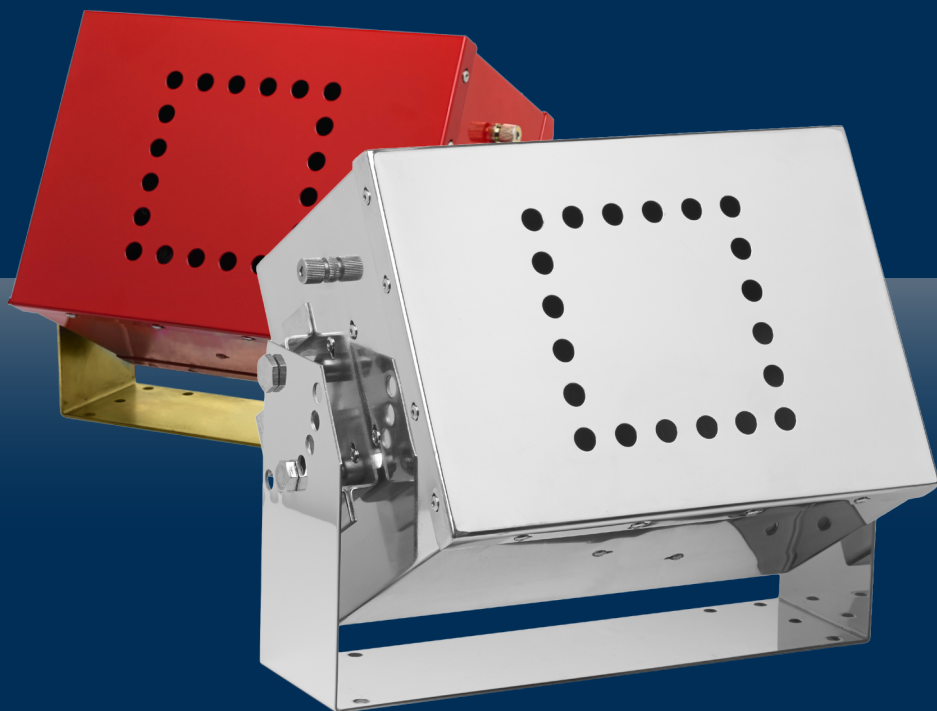

■ FP-1200

Product Code: 10147

Product Description: **FirePro Fire Extinguishing Generator FP-1200.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Carbon-Steel casing Red-coated

■ FP-1200S

Product Code: 10395

Product Description: **FirePro Fire Extinguishing Generator FP-1200S.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Stainless steel casing

■ FP-1200T

Product Code: 10316

Product Description: **FirePro Fire Extinguishing Generator FP-1200T.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

■ FP-1200TS

Product Code: 10622

Product Description: **FirePro Fire Extinguishing Generator FP-1200TS.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator
- Stainless steel casing

TECHNICAL INFORMATION

Model	FP-1200 / FP-1200S / FP-1200T / FP-1200TS
Activation mechanism	Thermal Electrical (min 1.5V DC, 0.8A in 3-4 sec)
Activator type	Heating element with 2.3 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	10900 g (excluding bracket)
Mass of FPC compound	1200 g
Operational discharge time	10 - 15 seconds
Discharge length	3.5 m
Dimensions	216 mm x 300 mm x 167 mm
Fire class	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets

FP-2000



FAMCO
هایپر صنعت

■ FP-2000

Product Code: 10149

Product Description: **FirePro Fire Extinguishing Generator FP-2000.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Carbon-Steel casing Red-coated

■ FP-2000S

Product Code: 10392

Product Description: **FirePro Fire Extinguishing Generator FP-2000S.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Stainless steel casing

■ FP-2000T

Product Code: 10317

Product Description: **FirePro Fire Extinguishing Generator FP-2000T.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

■ FP-2000TS

Product Code: 10623

Product Description: **FirePro Fire Extinguishing Generator FP-2000TS.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator
- Stainless steel casing

TECHNICAL INFORMATION

Model	FP-2000 / FP-2000S / FP-2000T / FP-2000TS
Activation mechanism	Thermal Electrical (min 1.5V DC, 0.8A in 3-4 sec)
Activator type	Heating element with 2.3 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	15500 g (excluding bracket)
Mass of FPC compound	2000 g
Operational discharge time	10 - 15 seconds
Discharge length	3.5 m
Dimensions	300 mm x 300 mm x 185 mm
Fire class	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets

www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲

FP-3000



FAMCO
هایپر صنعت

■ FP-3000

Product Code: 10150

Product Description: **FirePro Fire Extinguishing Generator FP-3000.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Carbon-Steel casing Red-coated

■ FP-3000S

Product Code: 10393

Product Description: **FirePro Fire Extinguishing Generator FP-3000S.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Stainless steel casing

■ FP-3000T

Product Code: 10318

Product Description: **FirePro Fire Extinguishing Generator FP-3000T.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

■ FP-3000TS

Product Code: 10624

Product Description: **FirePro Fire Extinguishing Generator FP-3000TS.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator
- Stainless steel casing

TECHNICAL INFORMATION

Model	FP-3000 / FP-3000S / FP-3000T / FP-3000TS
Activation mechanism	Thermal Electrical (min 1.5V DC, 0.8A in 3-4 sec)
Activator type	Heating element with 2.3 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	16300 g (excluding bracket)
Mass of FPC compound	3000 g
Operational discharge time	15 - 20 seconds
Discharge length	4 m
Dimensions	300 mm x 300 mm x 185 mm
Fire class	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets

www.famcocorp.com
E-mail: info@famcocorp.com
@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹
Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)
روبروی پالایشگاه نفت پارس، پلاک ۱۲

FP-4200



www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

FAMCO

هایپر صنعت

■ FP-4200T

Product Code: 10338

Product Description: **FirePro Fire Extinguishing Generator FP-4200T.**

Features:

- KIWA Approved
- Under Process to be UL, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

■ FP-4200TS

Product Code: 10644

Product Description: **FirePro Fire Extinguishing Generator FP-4200TS.**

Features:

- KIWA Approved
- Under Process to be UL, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Stainless steel casing.

TECHNICAL INFORMATION

Model	FP-4200T / FP-4200TS
Activation mechanism	Thermal Electrical (Min 1.5V DC, 0.8A in 3-4 sec)
Activator type	Heating element with 2.3 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	25000 g (excluding bracket)
Mass of FPC compound	4200 g
Operational discharge time	15 - 20 seconds
Discharge length	5 m
Dimensions	300 mm x 300 mm x 300 mm
Fire class	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets


تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲

FP-5700

FAMCO

هایپر صنعت

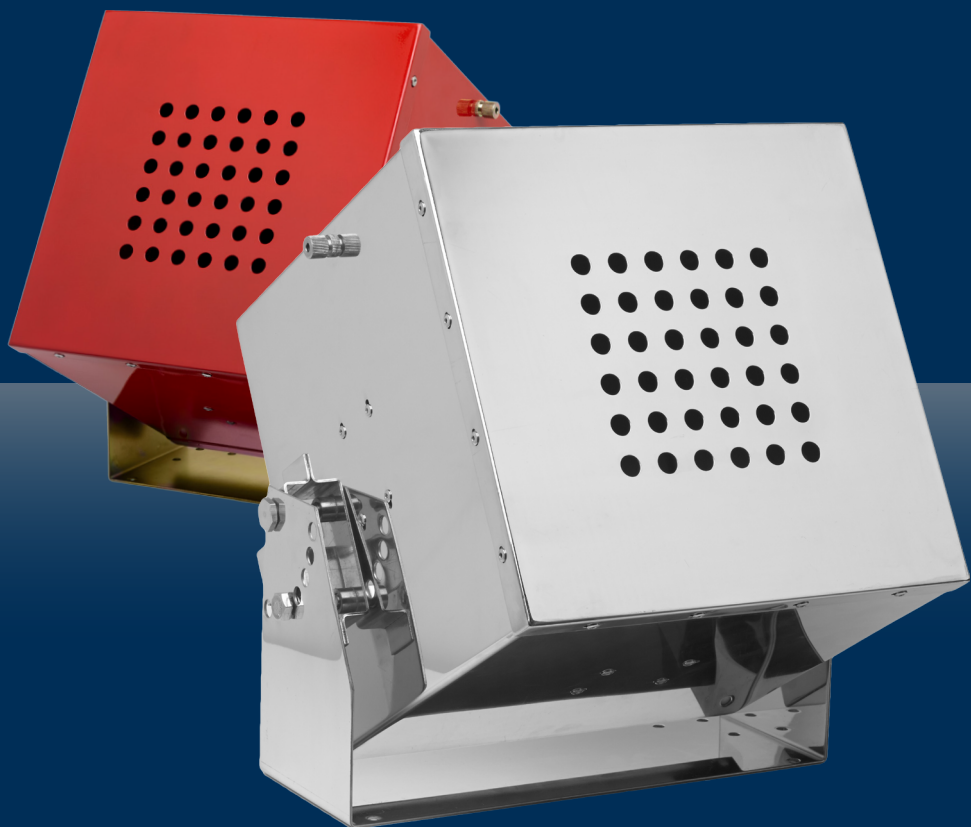

www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

■ FP-5700

Product Code: 10151

Product Description: FirePro Fire Extinguishing Generator FP-5700.

Features:

- UL, KIWA, BSI, ActivFire Approved
- Carbon-Steel casing Red-coated

■ FP-5700S

Product Code: 10394

Product Description: FirePro Fire Extinguishing Generator FP-5700S.

Features:

- UL, KIWA, BSI, ActivFire Approved
- Stainless steel casing

■ FP-5700T

Product Code: 10319

Product Description: FirePro Fire Extinguishing Generator FP-5700T.

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

■ FP-5700TS

Product Code: 10625

Product Description: FirePro Fire Extinguishing Generator FP-5700TS.

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Stainless steel casing.

TECHNICAL INFORMATION

Model	FP-5700 / FP-5700S / FP-5700T / FP-5700TS
Activation mechanism	Thermal Electrical (min 1.5V DC, 0.8A in 3-4 sec)
Activator type	Heating element with 2.3 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	26400 g (excluding bracket)
Mass of FPC compound	5700 g
Operational discharge time	15 - 20 seconds
Discharge length	8 m
Dimensions	300 mm x 300 mm x 300 mm
Fire class	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲