

**TECHNICAL DATA SHEET PHOENIX P30**



PP



PVDF+CF





POMc



AISI 316

**TECHNICAL DATA P30**

- FLUID CONNECTIONS : 1/2" BSP
- AIR CONNNECTION : 6 mm
- MAX FLOW RATE : 35 lt/min
- MAX AIR PRESSURE: 8 bar
- MAX DELIVERY HEAD: 80 m
- MAX SUCTION LIFT DRY: 5 m
- MAX SUCTION LIFT WET: 9,8 m
- MAX SOLID PASSING: 3,5 mm
- NOISE LEVEL: 65 dB
- DISPLACEMENT FOR CYCLE: 50 cc
- MAX VISCOSITY : 15.000 cps
- ATEX zone 2 : EX II 3/3 GD c IIB T135°C

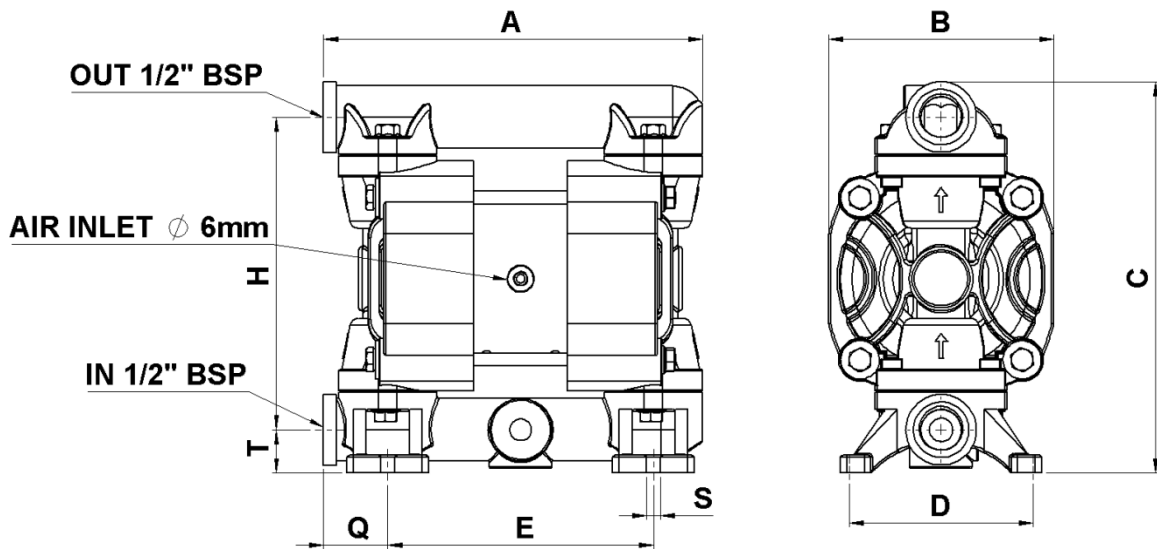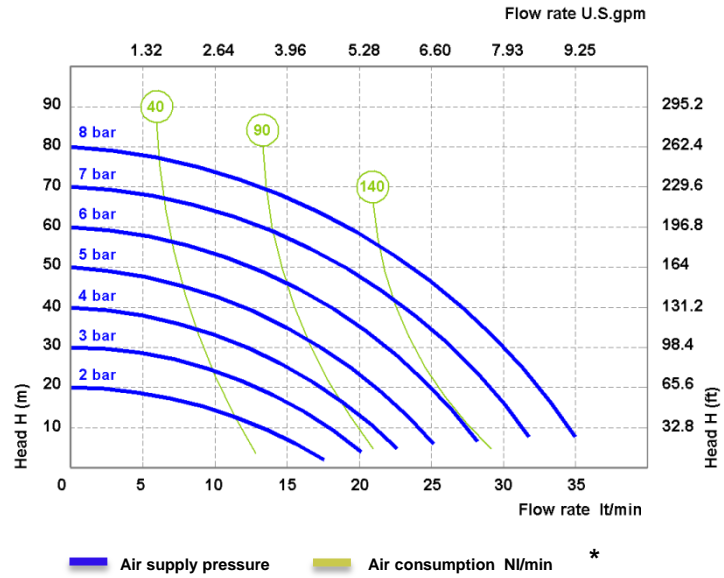

PHOENIX P30	A	B	C	D	E	H	Q	S	T	Weight Kg	Max Temperature
PP	177	105	183	86	124	146	30	6,5	20	1,4	65 °C
PVDF+CF	177	105	183	86	124	146	30	6,5	20	1,7	95 °C
POMc	177	105	183	86	124	146	30	6,5	20	1,4	95 °C
AISI 316	182	104	190	70	89	152	52	6,5	23	2,4	95 °C


\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material. Technical data are approximate and not binding for the manufacturer who reserves the right to change them without notice at any time.

**COMPOSITION**

MODEL	CASING	DIAPHRAGM	BALL	SEATS	GASKET	CONNECTIONS	ATEX	PORTS IN/OUT
P0030	P= PP KC= PVDF+CF O= POMc S=SS	HT=HYTRE+PTFE MT=SANTOPRENE+PTFE H=HYTREL M=SANTOPRENE	T= PTFE S= SS D=EPDM N=NBR	P=PP K=PVDF O=POMc S=SS Z=PE-UHMWE	D=EPDM V=VITON N=NBR T=PTFE	1=BSP 2=FLANGED 5=NPT	- = zone 2	AB=Standard

**AVAILABLE CONNECTIONS**

Standard = A B  
 IN = A-E-T-C-G  
 OUT =B-S-D-F-P

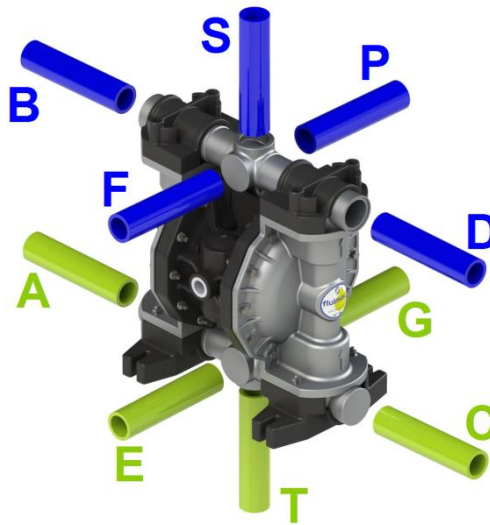

**HOW TO READ THE CODE**

