

# ITVAF



## ITVAF fixation à boulons

### Triphasés



| Description |                  |      |                                                                                   | Caractéristiques mécaniques |                  |      |          | Caractéristiques électriques |                 |      |       |     |       |       |
|-------------|------------------|------|-----------------------------------------------------------------------------------|-----------------------------|------------------|------|----------|------------------------------|-----------------|------|-------|-----|-------|-------|
| Code        | Type             | GR   |  | Plage vibrat. (vibr./min)   | Force centrifuge |      | Poids kg | Puissance absorb. max W      | Courant max (A) |      |       |     | Ia/In |       |
|             |                  |      |                                                                                   |                             | kg               | kN   |          |                              | 200Hz           |      | 150Hz |     |       | 100Hz |
| 603050      | ITVAF 6/600-S02  | AF10 | -                                                                                 | 6000                        | 610              | 5,98 | 8        | 500                          | 9,50            | 1,60 | -     | -   | 1,60  | 4,50  |
| 603053      | ITVAF 6/1220-S08 | AF33 | -                                                                                 | 6000                        | 1095             | 10,7 | 23       | 1200                         | 23,0            | 3,85 | -     | -   | 3,90  | 6,04  |
| 603054      | ITVAF 6/1510-S08 | AF33 | -                                                                                 | 6000                        | 1484             | 14,6 | 25       | 1700                         | 29,0            | 4,90 | -     | -   | 4,80  | 7,10  |
| 603037      | ITVAF 6/2010-S90 | AF50 | -                                                                                 | 6000                        | 1978             | 19,4 | 41       | 2000                         | 35,0            | 5,90 | -     | -   | 5,90  | 8,00  |
| 603010      | ITVAF 6/3300 o   | AF68 | -                                                                                 | 6000                        | 2800             | 27,5 | 74       | 4000                         | -               | -    | -     | -   | 11,0  | 5,10  |
| 604041      | ITVAF 9/1110-S08 | AF33 | -                                                                                 | 9000                        | 1230             | 12,0 | 22       | 1150                         | -               | -    | 18    | -   | 1,85  | 8,52  |
| 604042      | ITVAF 9/1510-S08 | AF33 | -                                                                                 | 9000                        | 1484             | 14,6 | 24       | 1600                         | -               | -    | 24    | 4,0 | 2,50  | 10,40 |

## ITVAF RS fixation à berceau

| Code   | Type                | GR   |   | Plage vibrat. (vibr./min) | Force centrifuge |      | Poids | Puissance absorb. max | 200Hz |      | Courant max (A) 150Hz |      | 100Hz | Ia/In |
|--------|---------------------|------|---|---------------------------|------------------|------|-------|-----------------------|-------|------|-----------------------|------|-------|-------|
|        |                     |      |   |                           | kg               | kN   | kg    | W                     | 42V   | 250V | 42V                   | 250V | 400V  |       |
| 603055 | ITVAF 6/1220-RS-S08 | AF33 | - | 6000                      | 1095             | 10,7 | 21    | 1200                  | 23    | 3,85 | -                     | -    | 3,9   | 6,04  |
| 603056 | ITVAF 6/1510-RS-S08 | AF33 | - | 6000                      | 1484             | 14,6 | 23    | 1700                  | 29    | 4,90 | -                     | -    | 4,8   | 7,10  |
| 604043 | ITVAF 9/1110-RS-S08 | AF33 | - | 9000                      | 1230             | 12,0 | 20    | 1150                  | -     | -    | 18                    | -    | 1,85  | 8,52  |
| 604044 | ITVAF 9/1510-RS-S08 | AF33 | - | 9000                      | 1484             | 14,6 | 22    | 1600                  | -     | -    | 24                    | 4,0  | 2,50  | 10,40 |

o Fourni seulement à 250V – 100Hz, type ventilé, protection IP44.

Ia/In = rapport entre courant de démarrage et courant max.

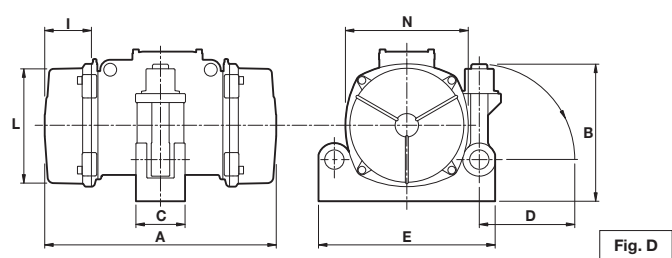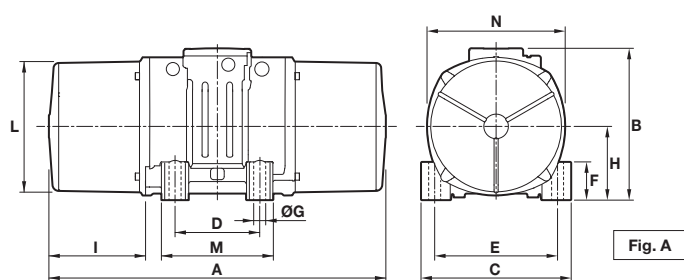

Caractéristiques dimensionnelles (mm)

| Type               | Fig. | A   | B     | C   | D   | E   | Trous |    | F   | H    | I     | L   | M   | N   |
|--------------------|------|-----|-------|-----|-----|-----|-------|----|-----|------|-------|-----|-----|-----|
|                    |      |     |       |     |     |     | ØG    | N° |     |      |       |     |     |     |
| ITVAF 6/600-S02    | A    | 255 | 179   | 152 | 90  | 125 | 13    | 4  | 28  | 73   | 54    | 124 | 128 | 141 |
| ITVAF 6/1220-S08   | A    | 289 | 216,5 | 215 | 100 | 180 | 17    | 4  | 47  | 93,5 | 63    | 170 | 145 | 182 |
| ITVAF 6/1510-S08   | A    | 375 | 216,5 | 215 | 100 | 180 | 17    | 4  | 47  | 93,5 | 106   | 170 | 145 | 182 |
| ITVAF 6/2010-S90 o | A    | 458 | 232   | 230 | 140 | 190 | 17    | 4  | 49  | 104  | 101,5 | 183 | 180 | 200 |
| ITVAF 6/3300 o     | A    | 528 | 267   | 310 | 155 | 255 | 23,5  | 4  | 122 | 115  | 140   | 265 | 215 | 275 |
| ITVAF 9/1110-S08   | A    | 289 | 216,5 | 215 | 100 | 180 | 17    | 4  | 47  | 93,5 | 63    | 170 | 145 | 182 |
| ITVAF 9/1510-S08   | A    | 375 | 216,5 | 215 | 100 | 180 | 17    | 4  | 47  | 93,5 | 106   | 170 | 145 | 182 |

| Type                | Fig. | A   | B   | C  | D   | E   | Trous |    | F | H | I   | L   | M | N   |
|---------------------|------|-----|-----|----|-----|-----|-------|----|---|---|-----|-----|---|-----|
|                     |      |     |     |    |     |     | ØG    | N° |   |   |     |     |   |     |
| ITVAF 6/1220-RS-S08 | D    | 289 | 189 | 83 | 140 | 240 | -     | -  | - | - | 63  | 170 | - | 182 |
| ITVAF 6/1510-RS-S08 | D    | 375 | 189 | 83 | 140 | 240 | -     | -  | - | - | 106 | 170 | - | 182 |
| ITVAF 9/1110-RS-S08 | D    | 289 | 189 | 83 | 140 | 240 | -     | -  | - | - | 63  | 170 | - | 182 |
| ITVAF 9/1510-RS-S08 | D    | 375 | 189 | 83 | 140 | 240 | -     | -  | - | - | 106 | 170 | - | 182 |