

DOMESTIC PUMP

INTELLIGENT FLOW FOR GOOD



LEO GROUP PUMP CO., LTD.
LEO GROUP PUMP (ZHEJIANG) CO., LTD.

📍 No.1, 3rd Street, East Industry Center, Wenling, Zhejiang, 317511, P.R.China
🌐 www.leopump.com ✉ export@leopump.com
☎ +86-576-8998 6360 📠 +86-576-8998 9898



Website



Facebook



YouTube

LEO reserves all the right of products modification without prior notification

🌐 www.famcocorp.com
✉ E-mail: info@famcocorp.com
📱 @famco_group

2024 V3.0

☎ Tel: ۰۲۱-۴۸۰۰۰۰۴۹
📠 Fax: ۰۲۱-۴۴۹۹۴۶۴۲


www.leopump.com

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)
روبروی پالایشگاه نفت پارس، پلاک ۱۲



Intelligent Flow For Good

As a reliable partner on intelligent fluid solutions, LEO Pump is engaged in R&D, manufacturing, sales and service of all series pumps and systems. By covering the industry of building, municipal, water conservation, power, energy, OEM, domestic and garden, Leo is committed to bring the intelligent water into every industry field and application, helping people around the world enjoy high quality water life, government and business partners achieve green transformation, and promoting high quality economic growth and sustainable social development.

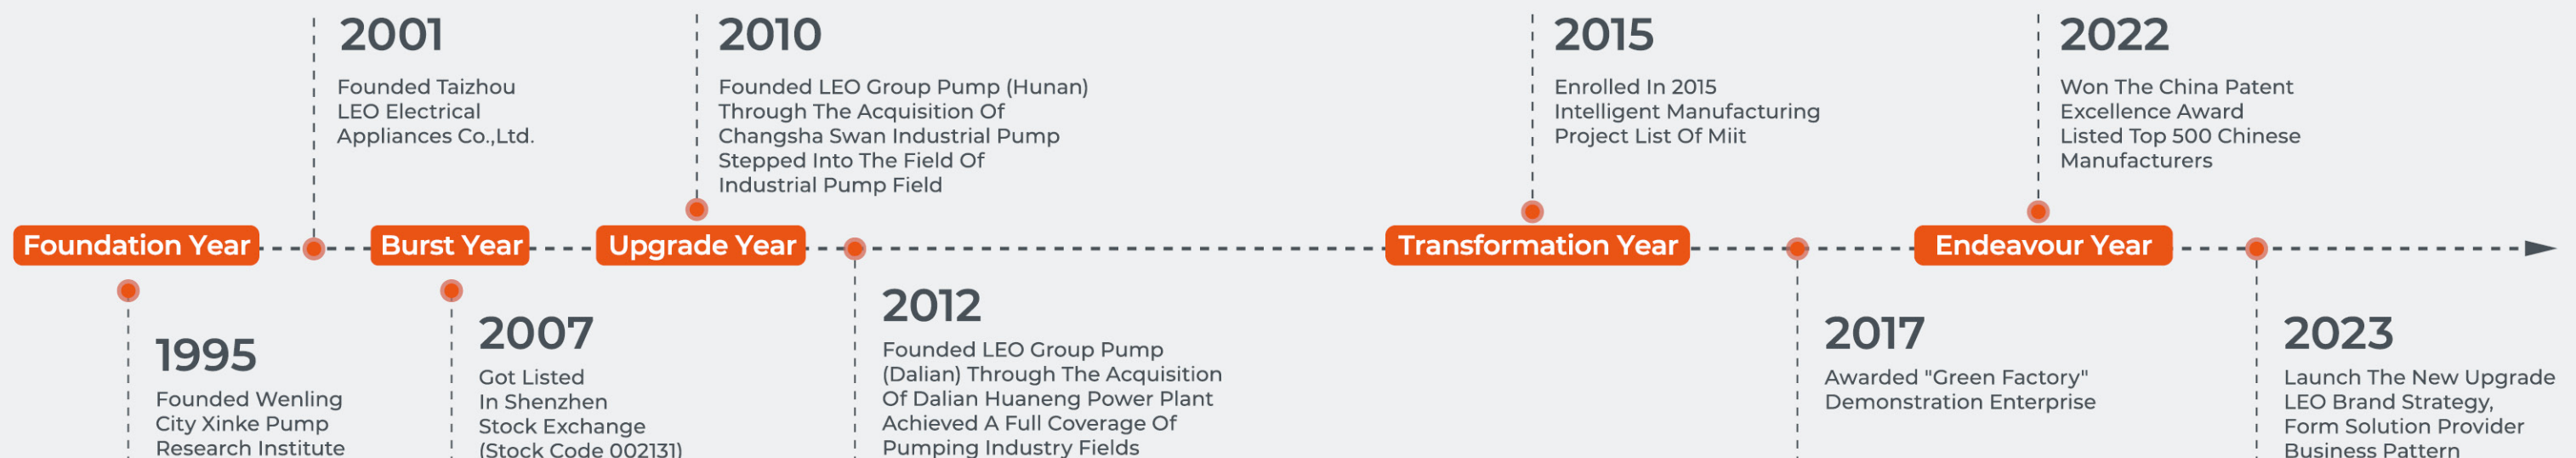

LEO WORLD



LEO IN NUMBERS

5

Production Bases

9

Overseas Subsidiaries

6,000,000⁺

Pumps Produced Yearly

160⁺

Countries

15,000⁺

Global Sales Outlets

500⁺

Million End-users Served



QUALITY MANAGEMENT SYSTEM

- ISO9001:2015 Quality management system
- ISO14001:2015 Environmental management system Certificate
- ISO45001:2018 Occupational health & safety Management system certification
- ISO50001: 2018 Energy management system certificate
- CE, GS, UL, CSA and ETL qualification



ISO 9001



UL LISTED





Application

- Can be used to transfer clean water or other liquids similar to water in physical and chemical properties
- Suitable for small living water supply, automatic water sprinkler system, small air conditioner system or supporting equipment etc.


Pump

- Special anti-rust treatment for cast iron pump body and support
- Brass impeller
- AISI 304 shaft
- Max. liquid temperature: +60°C
- Max. suction: 8 m

Motor

- Low noise&Long life bearing
- Motor with copper winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Enclosures class: IPX4
- Max. ambient temperature: +50°C
- IE 2 motor (AP110, AP150)

Identification Codes

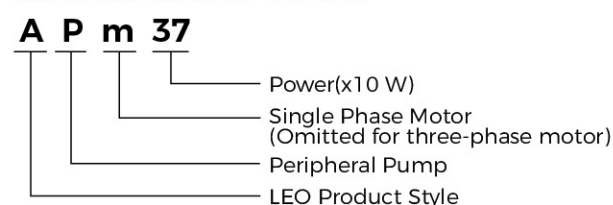


Technical Data


Model		Power		Q(m³/h)															
Single Phase	Three Phase	kW	HP	Q(l/min)		0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	3.0	3.6	4.2	4.8	5.4
					H (m)	0	5	10	15	20	25	30	35	40	50	60	70	80	90
APm30	-	0.3	0.4			30	26	20	15	12	8	5	-	-	-	-	-	-	-
APm37	-	0.37	0.5			40	35	30	25	20	15	10	5	-	-	-	-	-	-
APm60	-	0.6	0.8			60	55	50	40	35	30	25	20	10	5	-	-	-	-
APm75	-	0.75	1.0			75	70	60	50	45	35	28	22	15	5	-	-	-	-
APm90	-	0.75	1.0			90	75	60	50	35	25	15	5	-	-	-	-	-	-
APm110	AP110	1.1	1.5			85	80	75	65	60	55	50	45	40	30	18	10	-	-
APm150	AP150	1.5	2.0			90	85	80	75	70	65	60	55	50	40	30	20	10	-
APm220	AP220	2.2	3.0			100	95	90	85	80	75	70	65	60	50	40	30	20	10

Dimension

Model	DN1	DN2	L (mm)	W (mm)	H (mm)	L1 (mm)	L2 (mm)	L3 (mm)	W1 (mm)	H1 (mm)
APm30	1"	1"	260	132	155	46.5	80	8.5	100	63
APm37			260	132	155	46.5	80	8.5	100	63
APm60			282	147	185	51	90	8.5	112	73
APm75	3/4"	3/4"	300	147	185	54.5	90	8.5	112	73
APm90			297	147	185	50	90	8.5	112	73
APm110			338	165	210	56	100	9	125	86
APm150	1"	1"	338	165	210	56	100	9	125	86
APm220			395	170	235	56	123	12	140	96
AP220			338	165	210	56	100	9	125	86

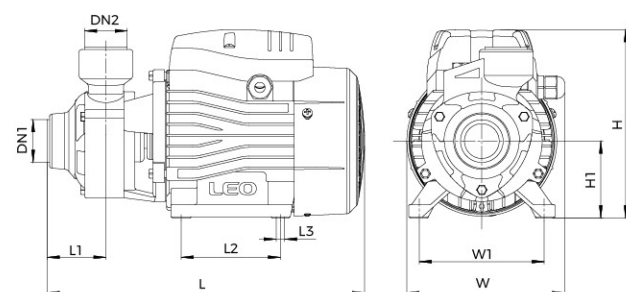


Hydraulic Performance Curves

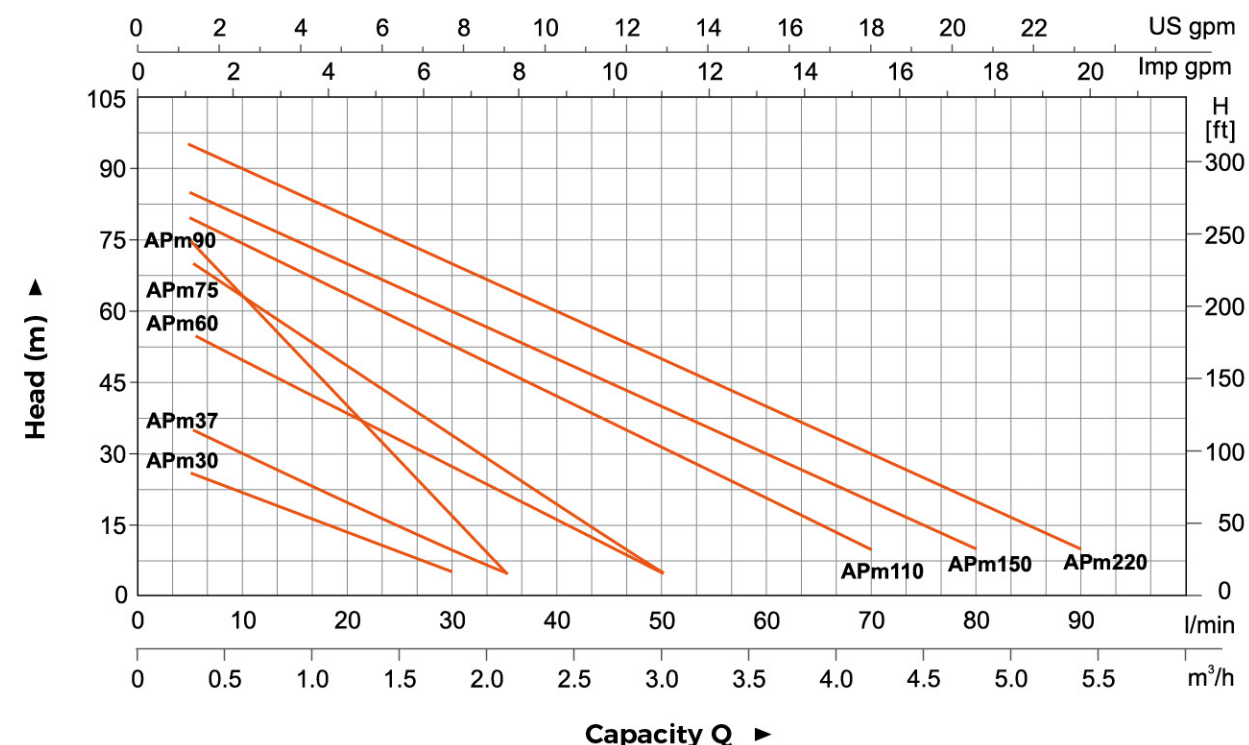

Material Table


No.	Part	Material
1	Pump body	HT200
2	Impeller	HPb59-1
3	O-ring	NBR
4	Mechanical seal	
5	Pump support	HT200
6	Bearing	
7	Rotor	
8	Fan cover	PP
9	Fan	PP-GF10
10	End plate	ADC12
11	Capacitor	
12	Cover box	PP-GF20
13	Wiring base assembly	PC
14	Stator	
15	Filling plug	HPb59-1


No.	Part	Material
14-1	Stator	
14-2	Base plate	PC+ABS

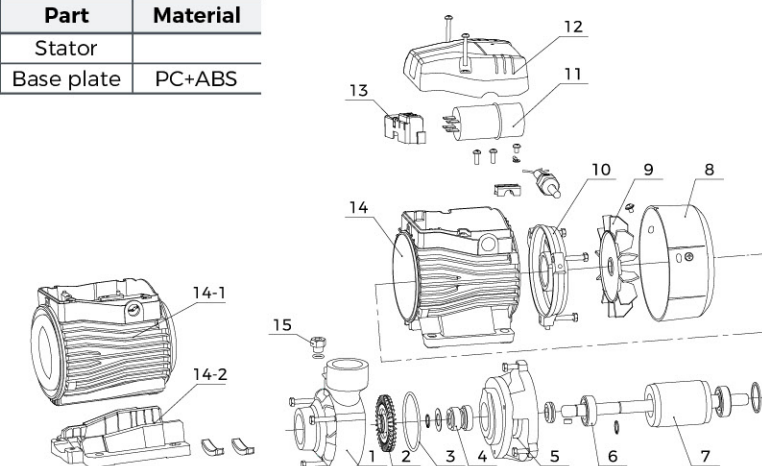

Package Information

Model	GW (Kgs)	L (mm)	W (mm)	H (mm)	Quantity (PCS/20'TEU)
APm30	5.65	283	158	174	3132
APm37	5.85	283	158	174	3132
APm60	9.5	315	190	210	2365
APm75	10.6	335	190	210	2222
APm90	10.8	335	190	210	2222
APm110	15.75	370	210	235	1230
APm150	16.85	370	210	235	1230
APm220	23.5	420	225	265	955
AP220	16.85	370	210	235	1230

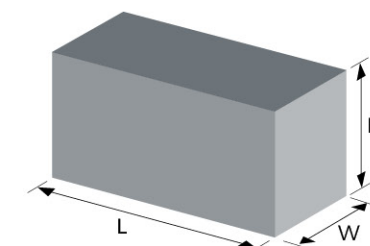

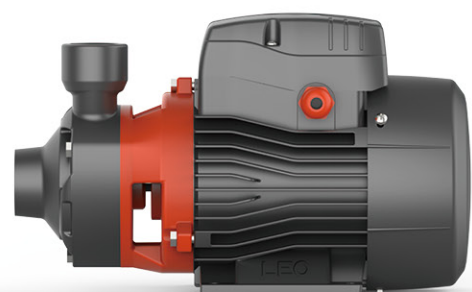

Application

- Can be used to transfer clean water or other liquids similar to water in physical and chemical properties
- Suitable for small living water supply, automatic water sprinkler system, small air conditioner system or supporting equipment etc.


Pump

- Special anti-rust treatment for cast iron pump body and support
- Anti-block system for impeller
- Brass impeller
- AISI 304 shaft
- Max. liquid temperature: +85°C
- Max. suction: +8 m

Motor


- Low noise&Long life bearing
- Motor with copper winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Enclosures class: IPX4
- Max. ambient temperature: +50°C

Identification Codes

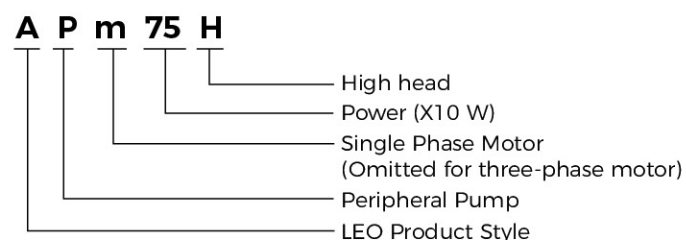

Technical Data


Model	Power		Q(m³/h)	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0
	kW	HP												
APm75H	0.75	1.0	H (m)	105	85	70	60	40	30	20	10	-	-	-
APm110H	1.1	1.5		125	110	100	85	70	60	40	32	25	15	-

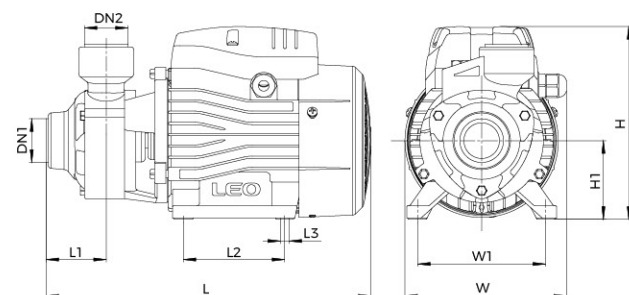

Dimension


Model	DN1	DN2	L (mm)	W (mm)	H (mm)	L1 (mm)	L2 (mm)	L3 (mm)	W1 (mm)	H1 (mm)
APm75H	3/4"	3/4"	299	147	183	52.5	90	8.5	112	73
APm110H	1"	1"	338	165	210	56	100	9	125	86

Hydraulic Performance Curves

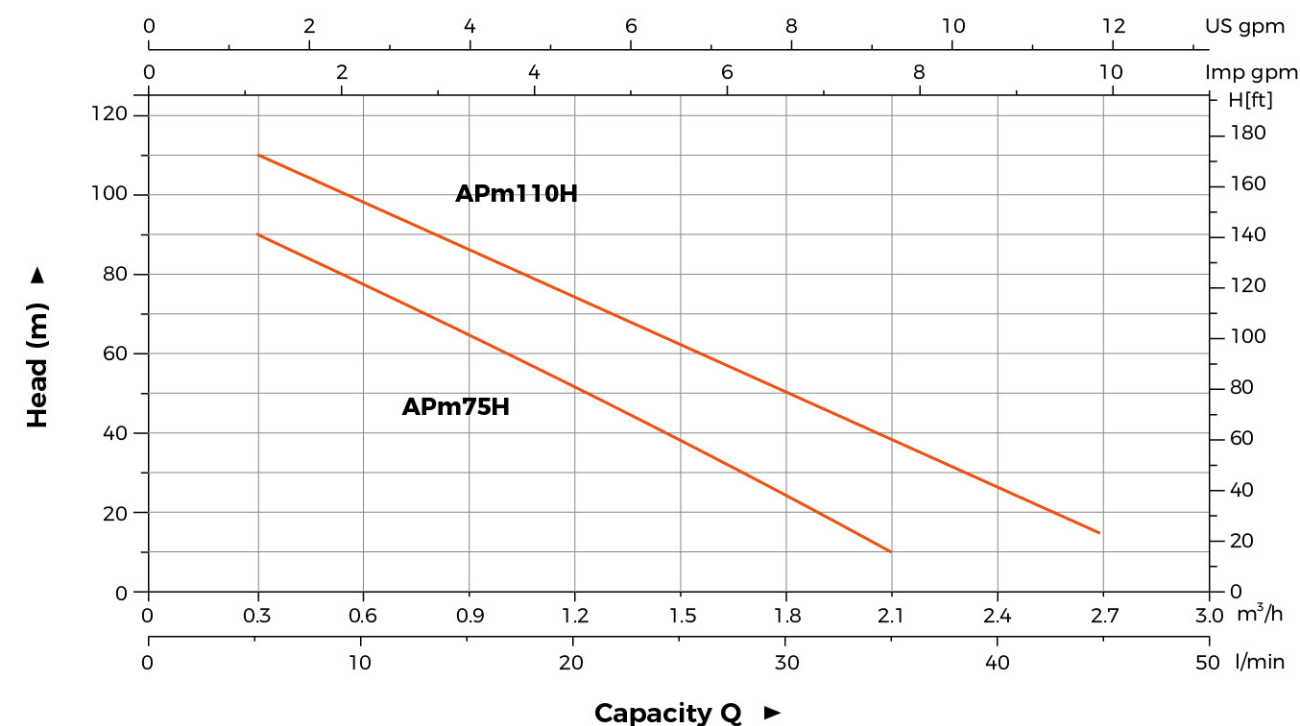


Material Table



No.	Part	Material
1	Pump body	HT200
2	Impeller	HPb59-1
3	O-ring	NBR
4	Mechanical seal	
5	Pump support	HT200
6	Bearing	
7	Rotor	
8	Fan cover	PP
9	Fan	PP-GF10
10	End plate	ADC12
11	Capacitor	
12	Cover box	PP-GF20
13	Wiring base assembly	PC
14	Stator	
15	Filling plug	HPb59-1

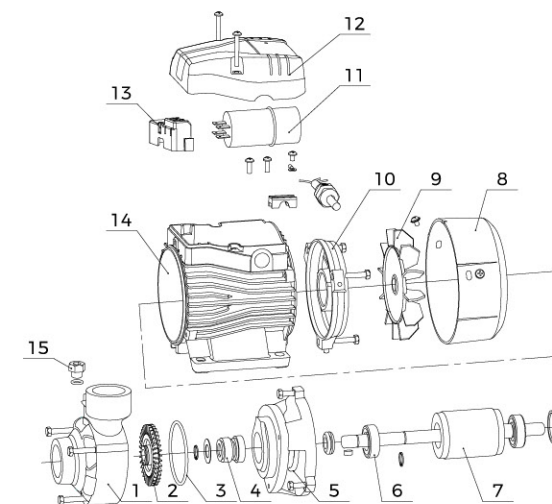

Package Information

Model	CW (Kgs)	L (mm)	W (mm)	H (mm)	Quantity (PCS/20'TEU)
APm75H	11.5	335	190	220	1851
APm110H	16.25	370	210	235	1565

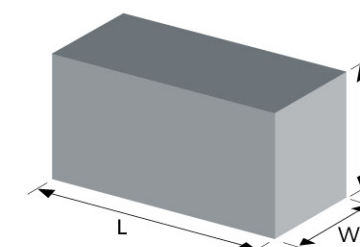

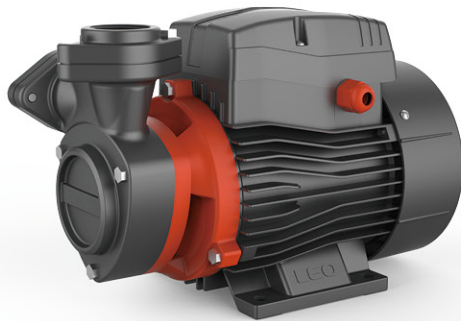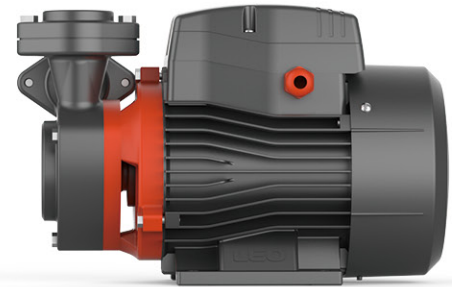

Application

- Can be used to transfer clean water or other liquids similar to water in physical and chemical properties
- Suitable for small living water supply, automatic water sprinkler system, small air conditioner system or supporting equipment etc.


Pump

- Special anti-rust treatment for cast iron pump body and support
- Brass impeller
- AISI 304 shaft
- Max. liquid temperature: +60°C
- Max. suction: +8 m

Motor


- Low noise&Long life bearing
- Motor with copper winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Enclosures class: IPX4
- Max. ambient temperature: +50°C
- IE 2 motor

Identification Codes

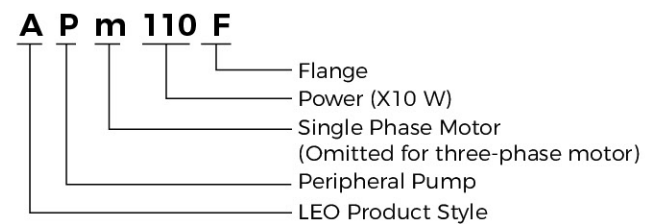

Technical Data


Model		Power		Q(m³/h)		0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	3.0	3.6	4.2	4.8
Single Phase	Three Phase	kW	HP	Q(l/min)	H (m)	0	5	10	15	20	25	30	35	40	50	60	70	80
APm110F	AP110F	1.1	1.5		H	85	80	75	65	60	55	50	45	40	30	18	10	-
APm150F	AP150F	1.5	2.0		H	90	85	80	75	65	60	55	50	45	40	30	18	10

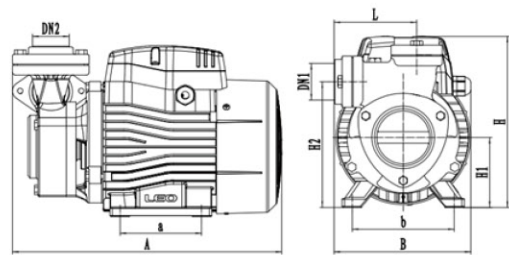

Dimension


Model	DN1	DN2	A (mm)	B (mm)	L (mm)	a (mm)	b (mm)	H (mm)	H1 (mm)	H2 (mm)
APm110F	1.25"	1.25"	330	168	100	100	125	210	86	154.5
APm150F	1.25"	1.25"	332	168	100	100	125	210	86	154.5

Hydraulic Performance Curves

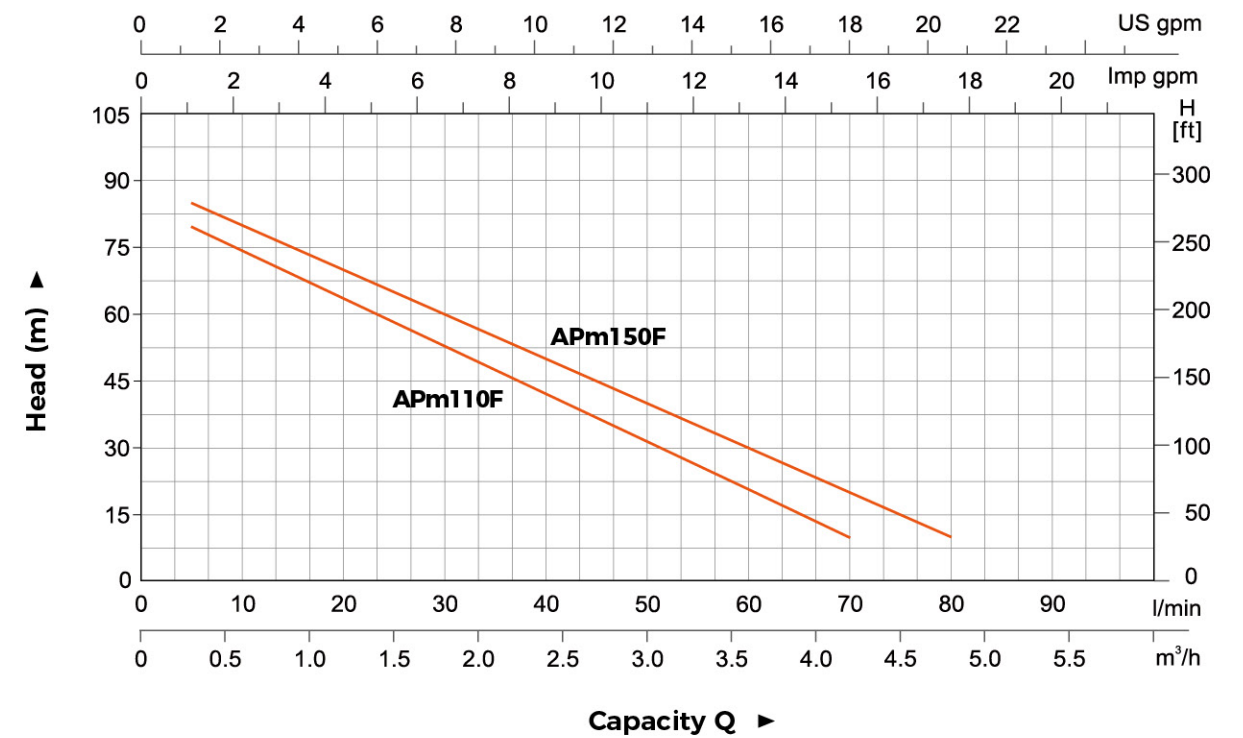


Material Table

No.	Part	Material
1	Pump body	HT200
2	Impeller	HPb59-1
3	O-ring	NBR
4	Mechanical seal	
5	Pump support	HT200
6	Bearing	
7	Rotor	
8	Fan cover	PP
9	Fan	PP-GF10
10	End plate	ADC12
11	Capacitor	
12	Cover box	PP-GF20
13	Wiring base assembly	PC
14	Stator	
15	Filling plug	HPb59-1

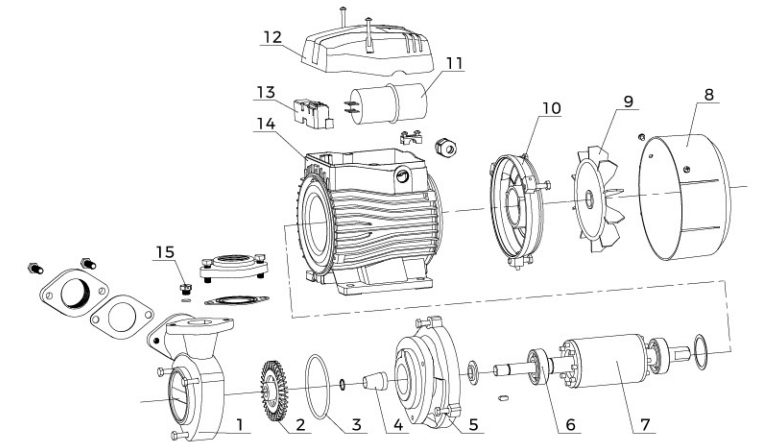

Package Information

Model	CW (Kgs)	L (mm)	W (mm)	H (mm)	Quantity (PCS/20'TEU)
APm110F	16.5	365	200	245	1240
APm150F	17.4	365	200	245	1180

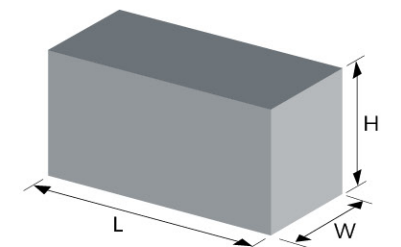

Identification Codes

24 V T T S - G1 S

- Stainless Steel Cover (Iron Tank without S)
- Cover Thread
- Stainless Steel Tank (Iron Tank without S)
- Actual Capacity=Nominal Capacity
- Pressure Tank
- Tank Type
- S: Vertical Flat Tank
- C: Horizontal Tank
- Nominal Tank Capacity
- V: Vertical Tank
- F: Vertical Tank with Foot Base

Tank



Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp (°C)	Connection
24ST	8	24	20	Epdm	60	G1"
24STT	8	24	24	Epdm	60	G1"



Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp (°C)	Connection
2VT	8	2	2	Epdm	60	G1/2"
4VT	8	4	4	Epdm	60	G1"
5VT	8	5	5	Epdm	60	G1"
8VT	8	8	8	Epdm	60	G1"
19VT	8	19	18	Epdm	60	G1"
24VT	8	24	20	Epdm	60	G1"
24VTT	8	24	24	Epdm	60	G1"



Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp (°C)	Connection
19CT	8	19	18	Epdm	60	G1"
24CT	8	24	20	Epdm	60	G1"
24CTT	8	24	24	Epdm	60	G1"

*For capacity < 50L, pressure gauge is optional.
For capacity ≥ 50L, pressure gauge is standard.

Tank



Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp (°C)	Connection
50CT	8	50	36	Epdm	60	G1"
50CTT	8	50	50	Epdm	60	G1"
60CTT	8	60	60	Epdm	60	G1"
100CT	8	100	80	Epdm	60	G1"
100CTT	8	100	100	Epdm	60	G1"

Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp (°C)	Connection
50FT	8	50	36	Epdm	60	G1"
50FTT	8	50	50	Epdm	60	G1"
60FTT	8	60	60	Epdm	60	G1"
100FT	8	100	80	Epdm	60	G1"
100FTT	8	100	100	Epdm	60	G1"
200FTT	8	200	200	Butyl	60	G1½"
300FTT	8	300	300	Butyl	60	G1½"
500FTT	8	500	500	Butyl	60	G1½"

*For capacity < 50L, pressure gauge is optional.
For capacity ≥ 50L, pressure gauge is standard.

3-Way / 5-Way



Model	Connection	Length
3TA	G1"	70 , 80
5TA	G1"	80 , 90
5TB	G1"	80 , 90

Foot Valve



FVA

Model	Connection
FVA1	1"
FVA1.25	1¼"
FVA1.5	1½"
FVA2	2"
FVA3	3"

- Stainless Steel mesh
- Can be used as a check valve

Flexible Hose



Model	FH12.8-01(L=128mm)	FH44-03(L=440mm)
Inlet	G3/4"	G1"
Outlet	G3/8"	G1"
Material	Stainless steel wire	
Operating Limits	Fluid temperature up to 35°C Max. ambient temperature 40°C	

Filter



Model	WF-01B	WF-02B
Inlet/Outlet	1" x 1"	1" x 1"
Capacity	1L	2L
Max. Pressure	5 bar	5 bar
Operating Limits	Fluid temperature up to 35°C Max. ambient temperature 40°C	

Pressure Gauge



Axial

Radial

PG - P 40 A

A: Axial; R: Radial
Size (40mm, 50mm, 60mm)
P: Plastic; S: Iron sheet; SS: Stainless steel
Pressure gauge

- Two connection types: (1) G1/4" (2) M10x1
- For 40mm gauge, the scale: 0 - 6 bar
- For 50mm gauge, the scale: 0 - 10 bar or 0 - 6 bar
- Back/bottom connection

Automatic Pump Controller



PS-04A

Rated Voltage	110-120VAC	220-240VAC	110-240VAC
Rated Frequency	50-60Hz		
Max. Current	10(6)A		
Max. Power(P1)	0.55kW(110-120VAC)		1.1kW(220-240VAC)
Starting Pressure	1.0bar, 1.5bar, 2.2bar		
Max. Working Pressure	10bar		
Screw Size	R1", NPT1"; G1", G1-1/4"; G1-1/2"		
Protection Class	IP65		
Max. Working Temperature	60 °C		



PS-04B

Rated Voltage	110-120VAC	220-240VAC	110-240VAC
Rated Frequency	50-60Hz		
Max. Current	10(6)A		
Max. Power(P1)	0.55kW(110-120VAC)		1.1kW(220-240VAC)
Starting Pressure	1.2bar, 1.5bar, 2.2bar		
Max. Working Pressure	10bar		
Screw Size	R1"		
Protection Class	IP65		
Max. Working Temperature	60 °C		



PS-04C

Rated Voltage	110-120VAC	220-240VAC	110-240VAC
Rated Frequency	50-60Hz		
Max. Current	10(6)A		
Max. Power(P1)	0.55kW(110-120VAC)		1.1kW(220-240VAC)
Starting Pressure	1.2bar, 1.5bar, 2.2bar		
Max. Working Pressure	10bar		
Screw Size	G1"		
Protection Class	IP54		
Max. Working Temperature	60 °C		

* 1bar=14.50PSI

Automatic Pump Controller



PS-04D

Rated Voltage	110-240VAC	220-240VAC	380VAC
Rated Frequency	50-60Hz		
Max. Current	30(16)A		
Max. Power(P1)	1.1kW	2.2kW	4.0kW
Starting Pressure	1.2bar, 1.5bar, 2.2bar		
Max. Working Pressure	10bar		
Screw Size	G1", G1-1/4", G1-1/2", NPT1"		G1-1/2"
Protection Class	IP65		
Max. Working Temperature	60 °C		



PS-04E

Rated Voltage	110-120VAC	220-240VAC	110-240VAC
Rated Frequency	50-60Hz		
Max. Current	30(16)A		
Max. Power(P1)	1.1kW(110-120VAC)	2.2kW(220-240VAC)	
Starting Pressure	0.8bar - 6.7bar		
Max. Working Pressure	8bar		
Screw Size	G1"		
Protection Class	IP65		
Max. Working Temperature	60 °C		



PS-04E-1

Rated Voltage	110-120VAC	220-240VAC	110-240VAC
Rated Frequency	50-60Hz		
Max. Current	30(16)A		
Max. Power(P1)	1.1kW(110-120VAC)	2.2kW(220-240VAC)	
Starting Pressure	1.5bar, 2.2bar		
Max. Working Pressure	8bar		
Screw Size	G1"		
Protection Class	IP65		
Max. Working Temperature	60 °C		

* 1bar=14.50PSI

Automatic Pump Controller



PS-04T

Rated Voltage	110-120VAC	220-240VAC	110-240VAC
Rated Frequency	50-60Hz		
Max. Current	10(6)A		
Max. Power(P1)	0.55kW(110-120VAC)		1.1 kW(220-240VAC)
Starting Pressure	1.2 - 2.5bar		
Max. Working Pressure	10bar		
Screw Size	G1"		
Protection Class	IP65		
Max. Working Temperature	60 °C		



PS-04F

Rated Voltage	220-240V		
Rated Frequency	50-60Hz		
Max. Current	16(10)A		
Max. Power(P1)	1.8kW(220-240VAC)		
Starting Pressure	0.5-3bar		
Max. Working Pressure	10bar		
Screw Size	G1"		
Protection Class	IP65		
Max. Working Temperature	60 °C		

Pressure Switch



PS-02A

Rated Voltage	110-120VAC	220-240VAC
Frequency	50/60 Hz	
Max. Current	20A	12A
Max. Power(P1)	1.6kW	1.9kW
Min. Cut-in	1 bar	
Max. Cut-out	7bar	
Starting/Stopping Pressure	bar: 1.0/2.1; 1.4/2.8; 2.1/3.5; 2.8/4.2; 3.5/4.9; 4.9/7.0	
Screw Size	Female: NPT1/4, ZG1/4 Male: NPT1/4, ZG1/4 Female revolving connector: G1/4, G3/8	
Protection Class	IP20	
Max. Working Temperature	60°C	

* Max. working pressure=Max. cut out*1.5

Pressure Switch



PS-02B

Rated Voltage	110-120VAC	220-240VAC
Frequency	50/60 Hz	
Max. Current	20A	16A
Max. Power(P1)	1.6kW	2.6kW
Min. Cut-in	1bar	
Max. Cut-out	12bar	
Starting/Stopping Pressure	bar: 1.4/2.8; 2.1/3.5; 6.3/8.7; 9.6/12	
Screw Size	Female: NPT1/4, G1/4 Male: ZG1/4, M14 Female revolving connector: G1/4	
Protection Class	IP20	
Max. Working Temperature	60°C	

Capacitor



2 wires

2(4) terminals

Capacity(μF)	Type	Diameter(mm)	Length (mm)
6	2 wires	32	66
8	2 wires	32	66
8	4 terminals	35	72
10	2 wires	34	62
10	4 terminals	35	72
12	2 wires	40	73
16	2 wires	42	71
16	4 terminals	42	73
20	2 wires	42	74
20	4 terminals	42	74
25	2 wires	42	82
35	4 terminals	42	70
40	2 wires	42	82
40	4 terminals	45	73
42.5	2 terminals	51	100
45	2 terminals	51	100
50	2 terminals	51	100



PS-02C

Rated Voltage	110-120VAC	220-240VAC	400VAC
Frequency	50/60 Hz		
Max. Current	16(8)A		
Max. Power(P1)	0.6kW	1.3kW	4.0kW
Min. Cut-in	1bar		
Max. Cut-out	5.5bar		
Starting/Stopping Pressure	bar: 1.2/2.4; 1.4/2.8; 1.5/3.0; 2.0/3.5; 3.5/4.9		
Screw Size	Female: NPT1/4, G1/4, Male: NPT1/4, G1/4, ZG1/4, Female revolving connector: G1/4, G3/8		
Protection Class	IP44		
Max. Working Temperature	60°C		

Float Switch



FLO-01B

FLO-01B(With balance block)

Model	FLO-01B	FLO-01B(With balance block)
Specification	16(8)A 125/250V	
Cable	H07RN-F/8-F 3G1.0mm2x0.55m/0.65m/0.75m/2m/3m/5m/10m	
Lifetime	50000 cycles	
IP Protection	IP X8	
Operating Limits	Fluid temperature up to 35°C Max. ambient temperature 40°C	



PS-02D

Rated Voltage	110-120VAC	220-240VAC
Frequency	50/60 Hz	
Max. Current	12A	
Max. Power(P1)	1.0kW	1.9kW
Min. Cut-in	1.4bar	
Max. Cut-out	6.9bar	
Starting/Stopping Pressure	bar: 1.4/2.8; 2.1/3.4; 2.8/4.1; 3.4/4.8	
Screw Size	Female: G1/4, Male: ZG1/4, G1/4, NPT1/4 Female revolving connector: G1/4, G3/8	
Protection Class	IP20	
Max. Working Temperature	60°C	

* Max. working pressure=Max. cut out*1.5