

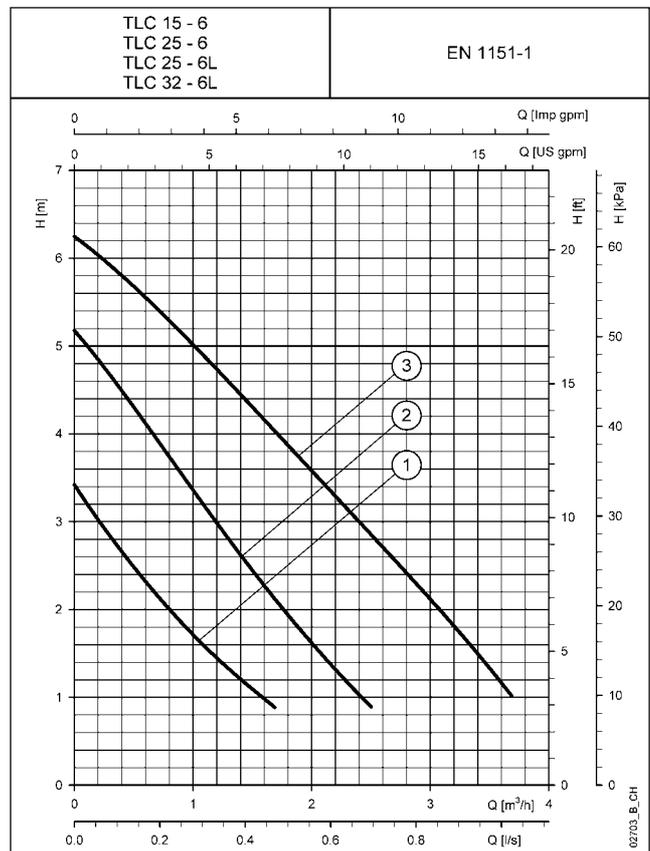
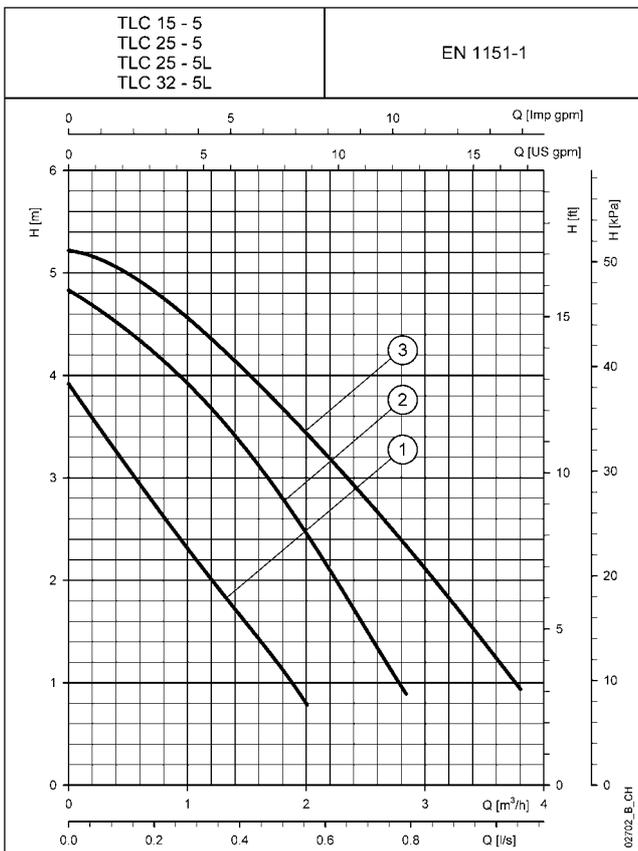
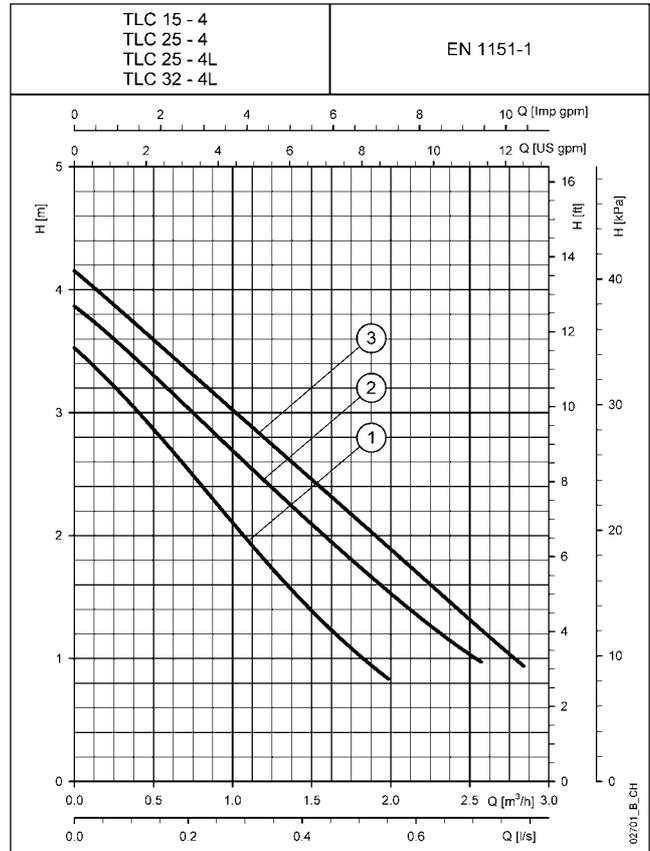


TLC SERIES SINGLE-PHASE OPERATING CHARACTERISTICS

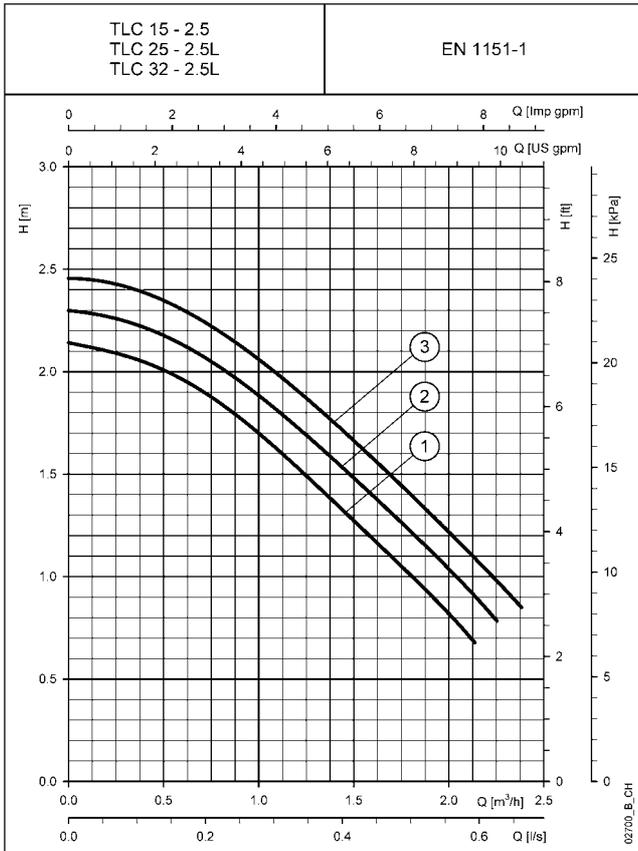





These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

**TLC SERIES
SINGLE-PHASE OPERATING CHARACTERISTICS**

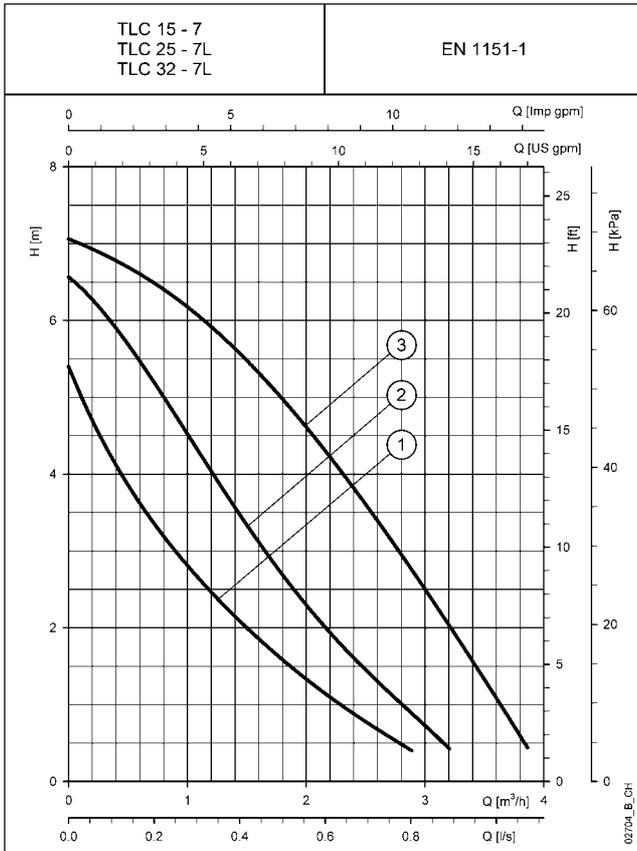





These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

TLCH SERIES SINGLE-PHASE OPERATING CHARACTERISTICS

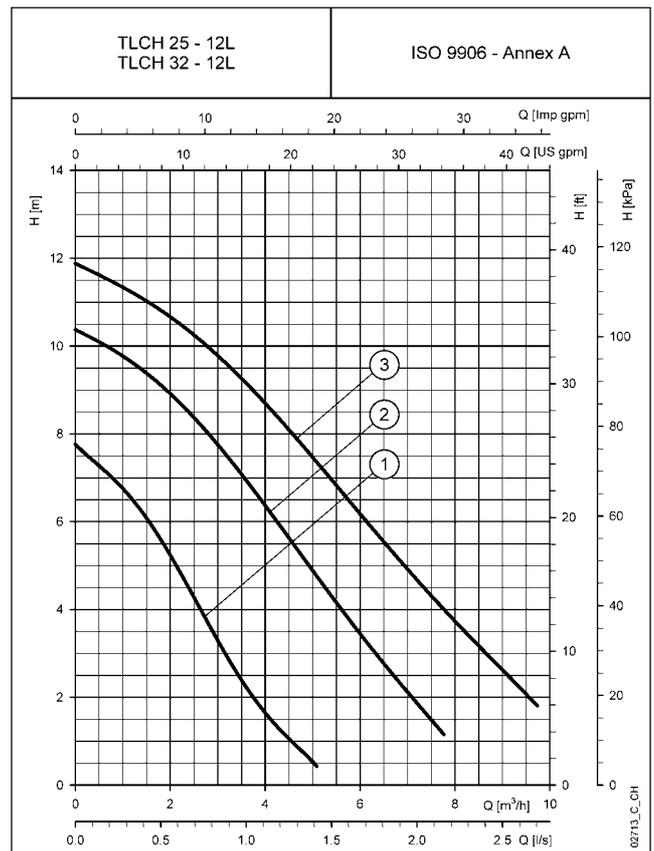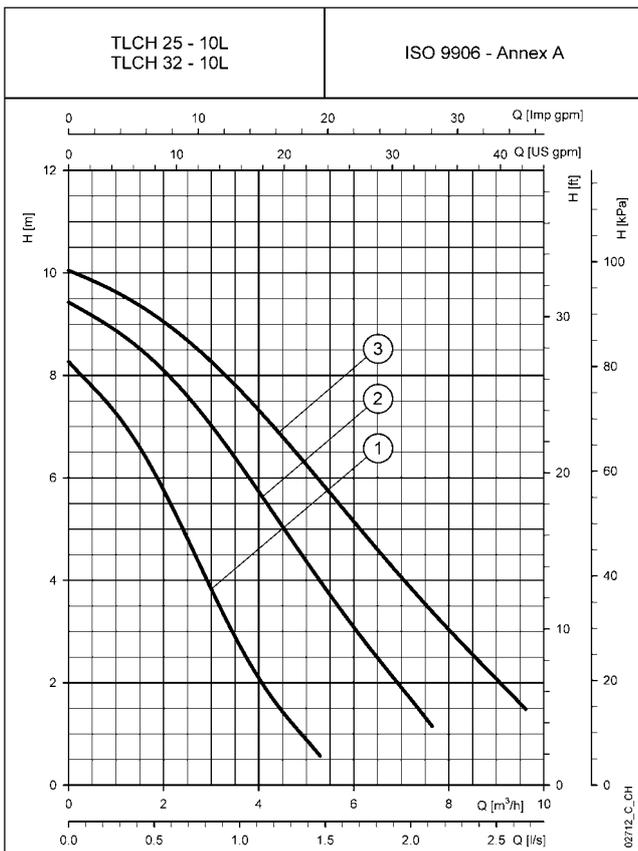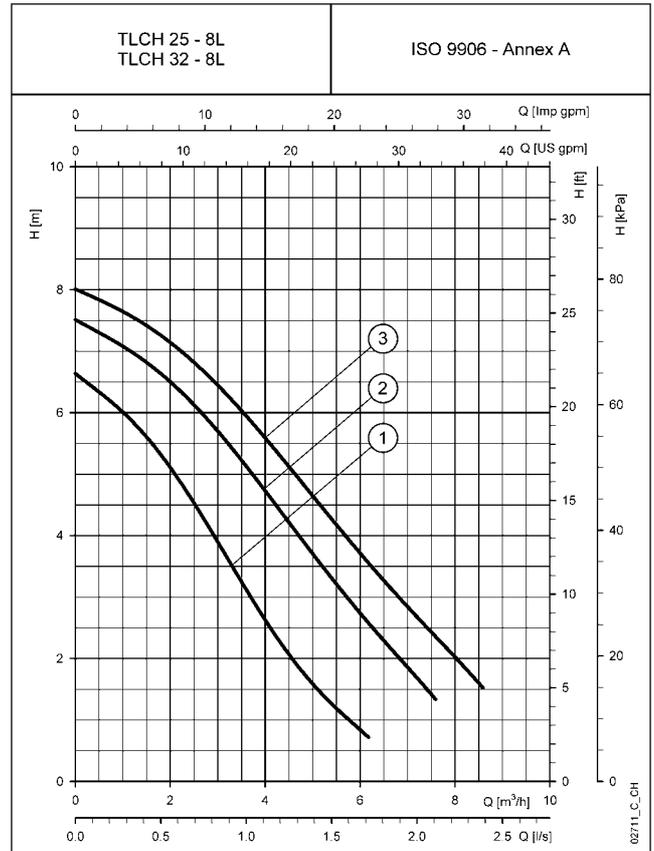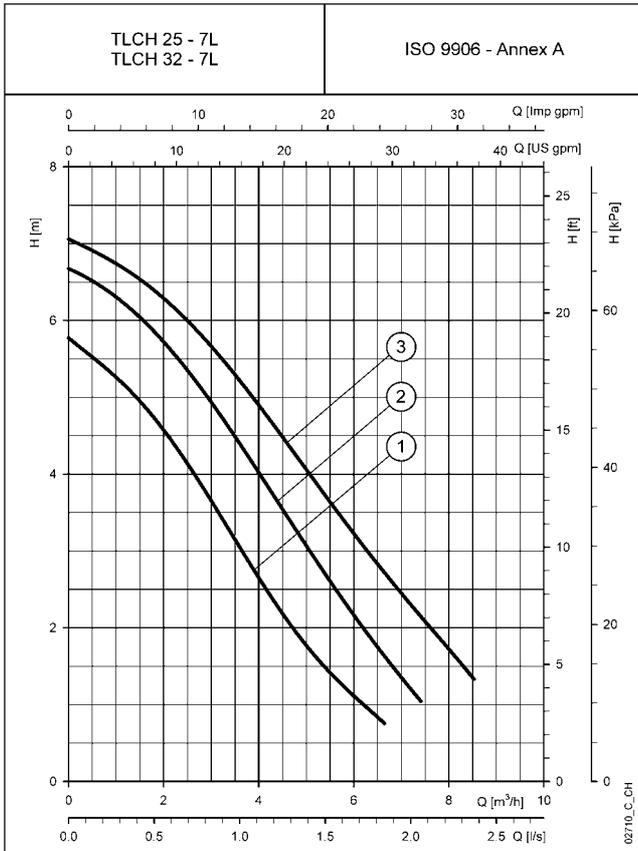





These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

**TLCB SERIES
SINGLE-PHASE OPERATING CHARACTERISTICS**

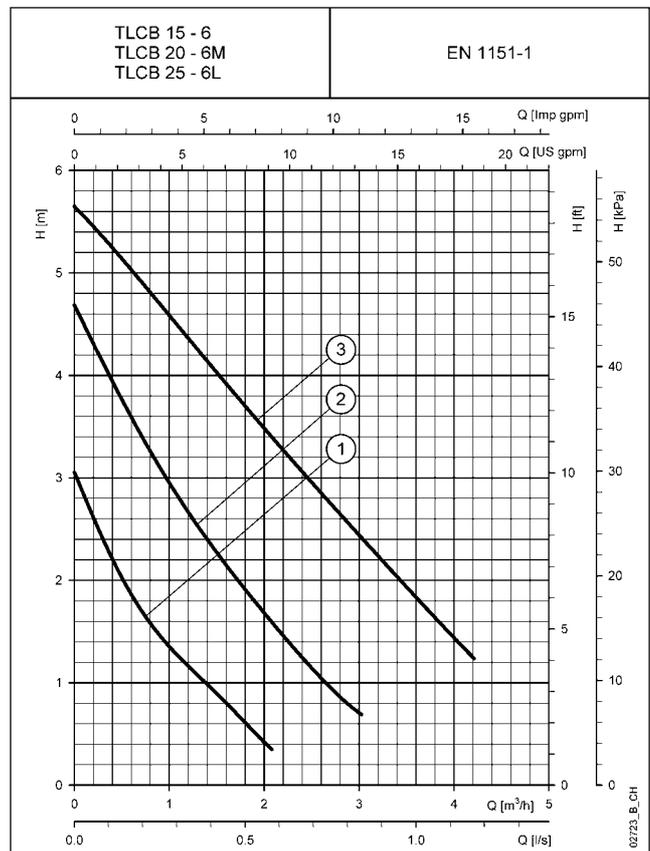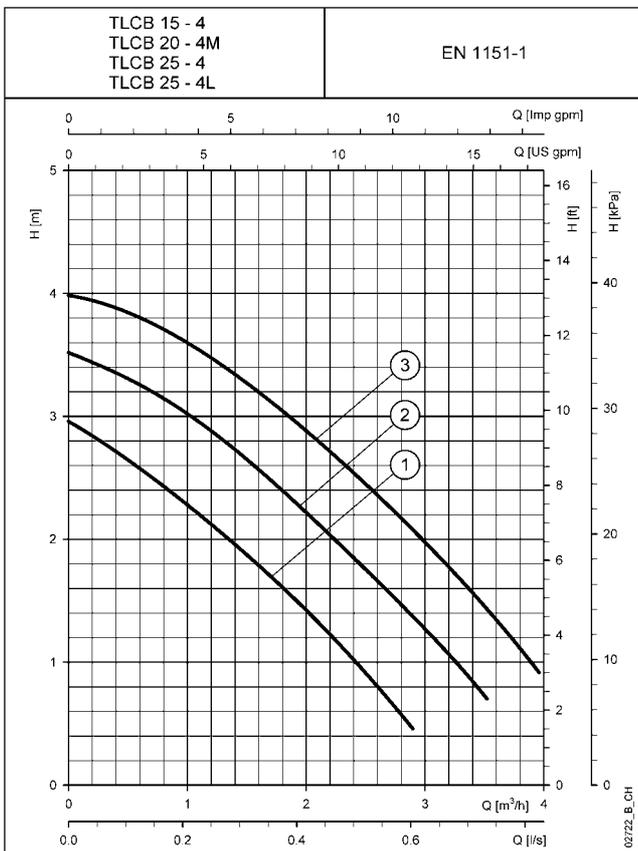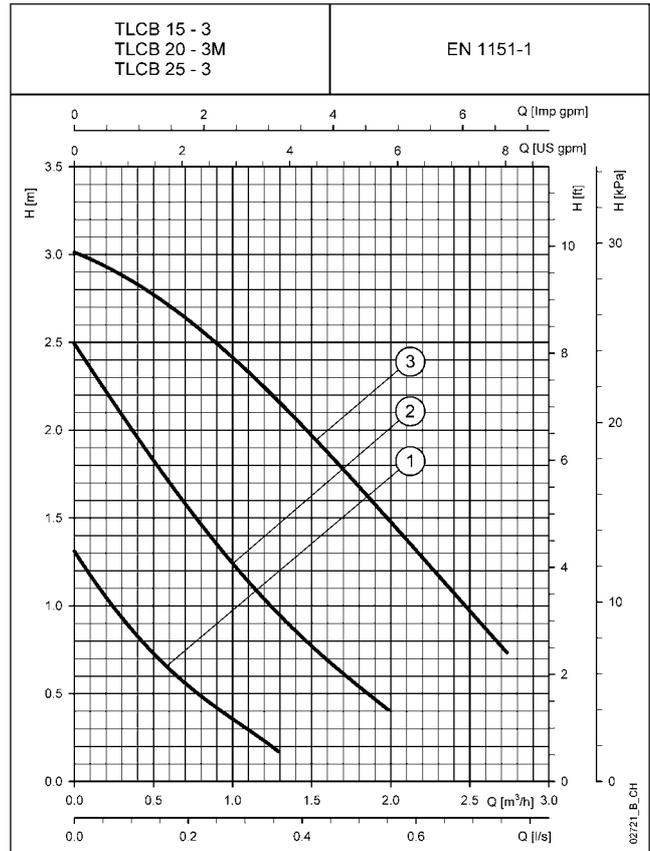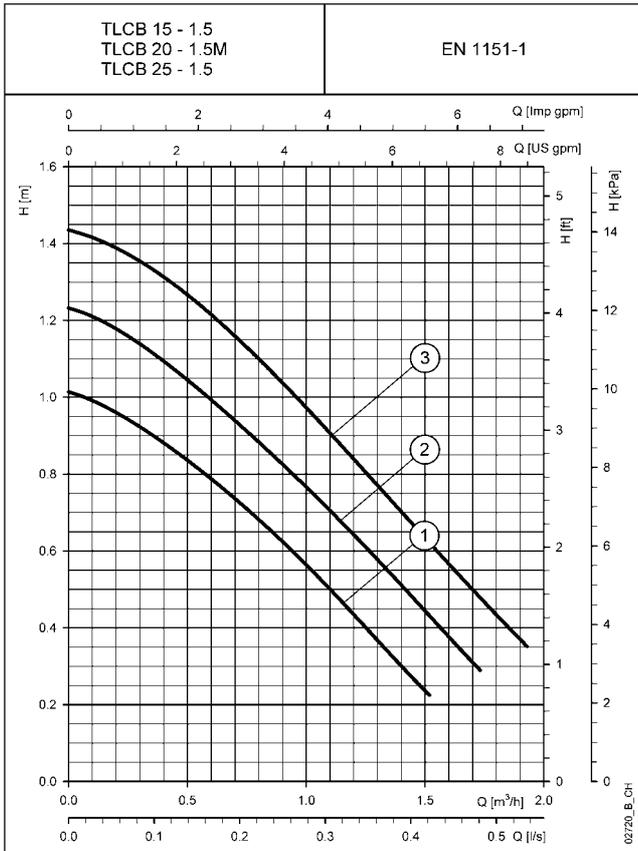



These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

**TLCHB SERIES
SINGLE-PHASE OPERATING CHARACTERISTICS**

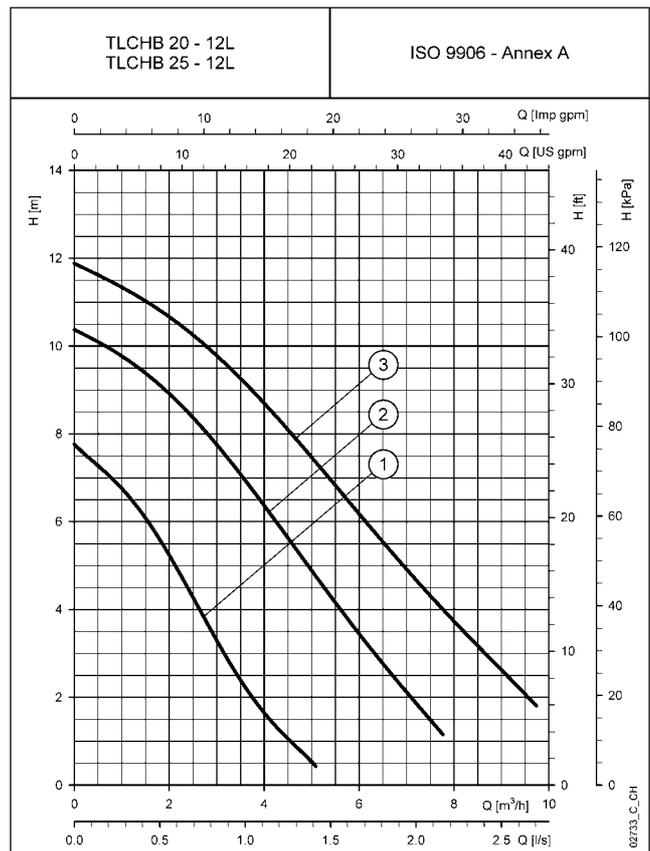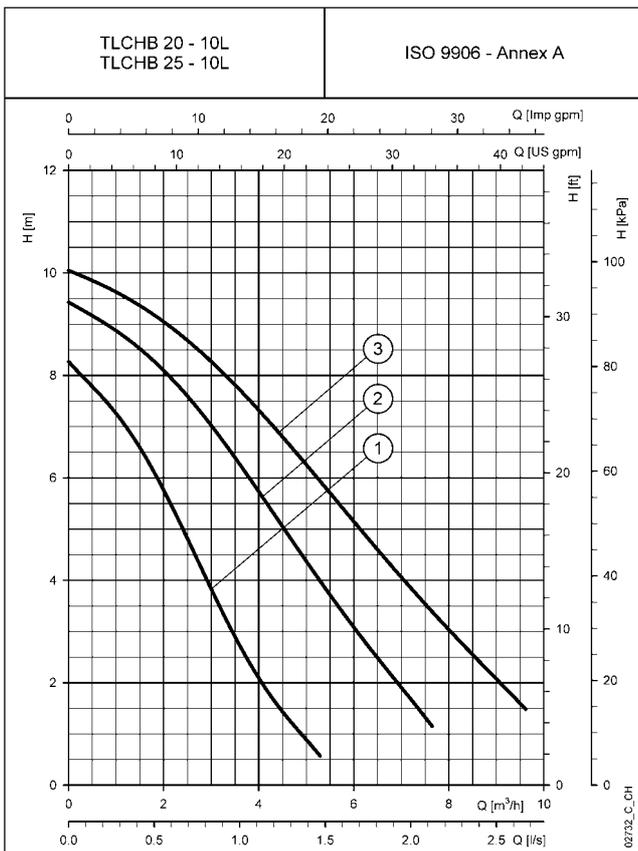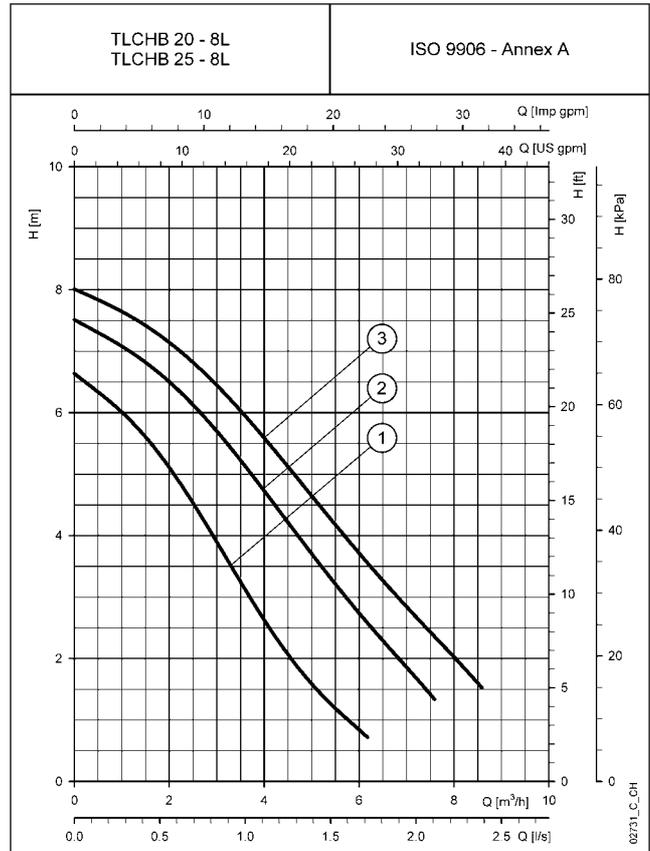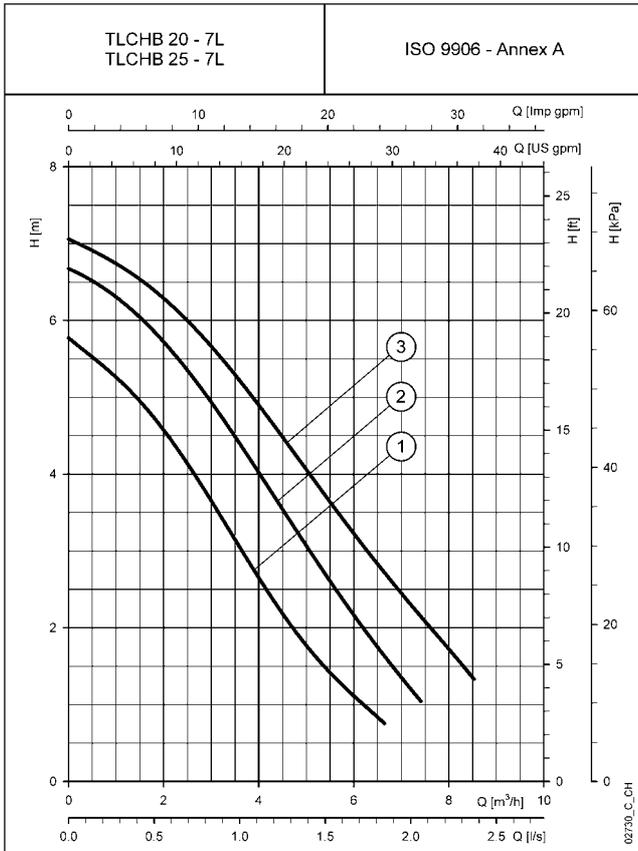



These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

**TLCSOL SERIES
SINGLE-PHASE OPERATING CHARACTERISTICS**

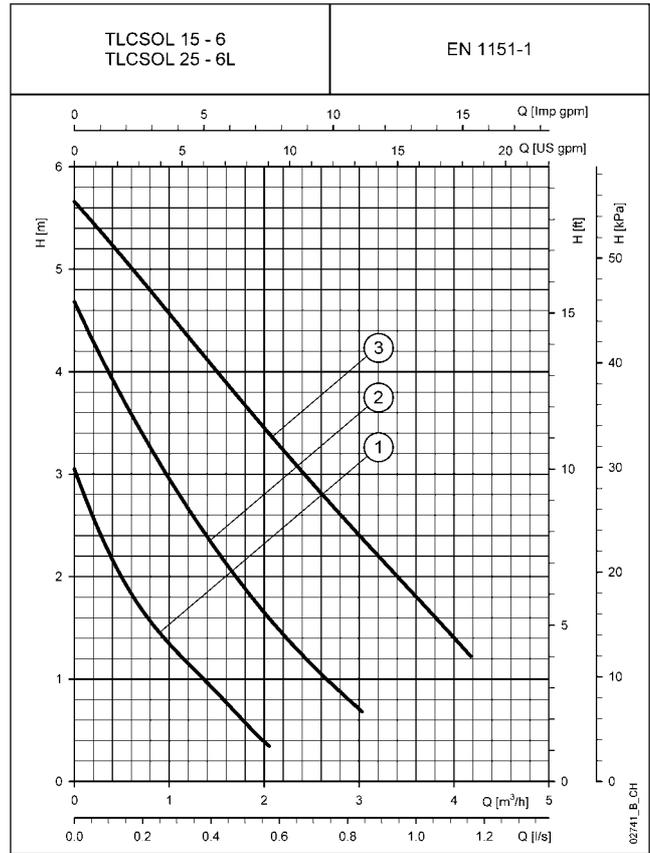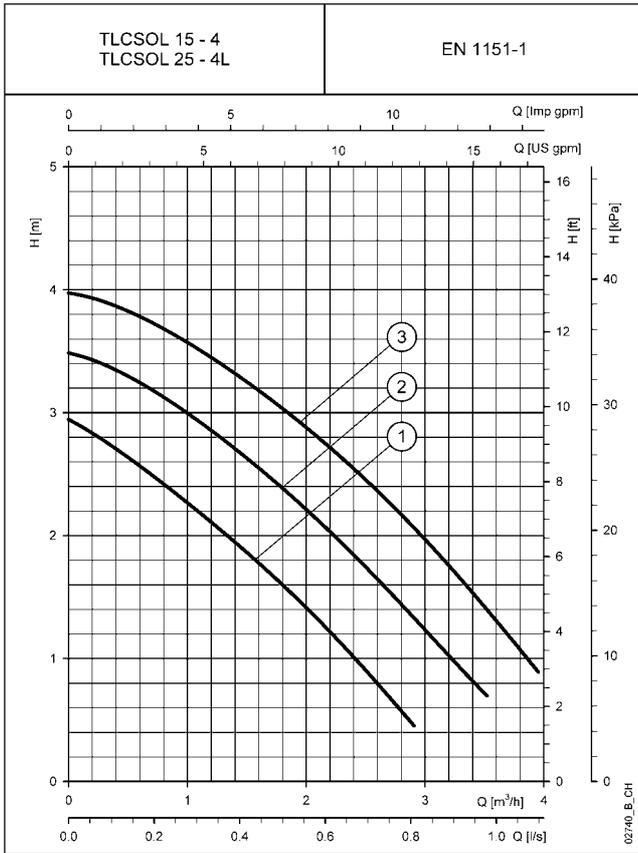

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

**TLCK SERIES
SINGLE-PHASE OPERATING CHARACTERISTICS**

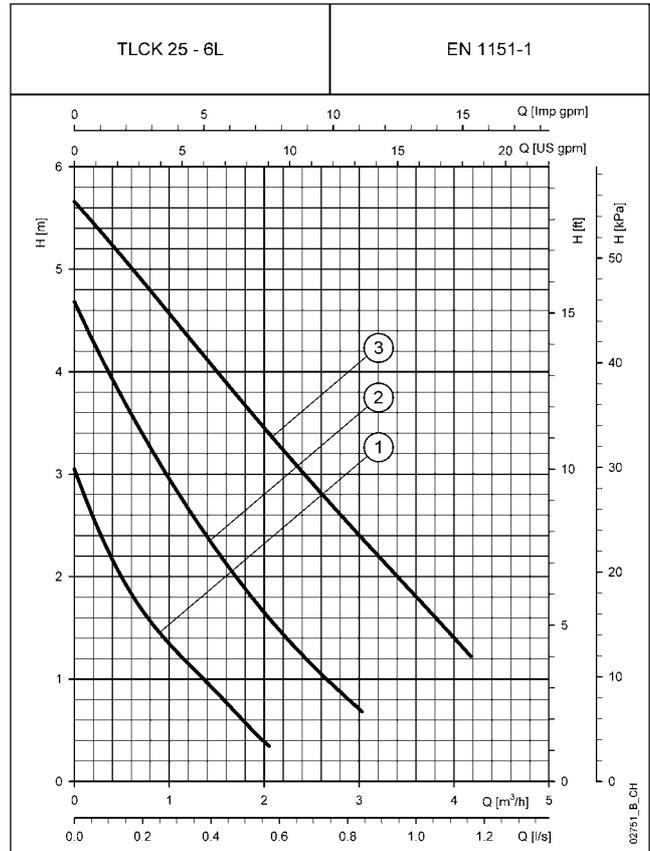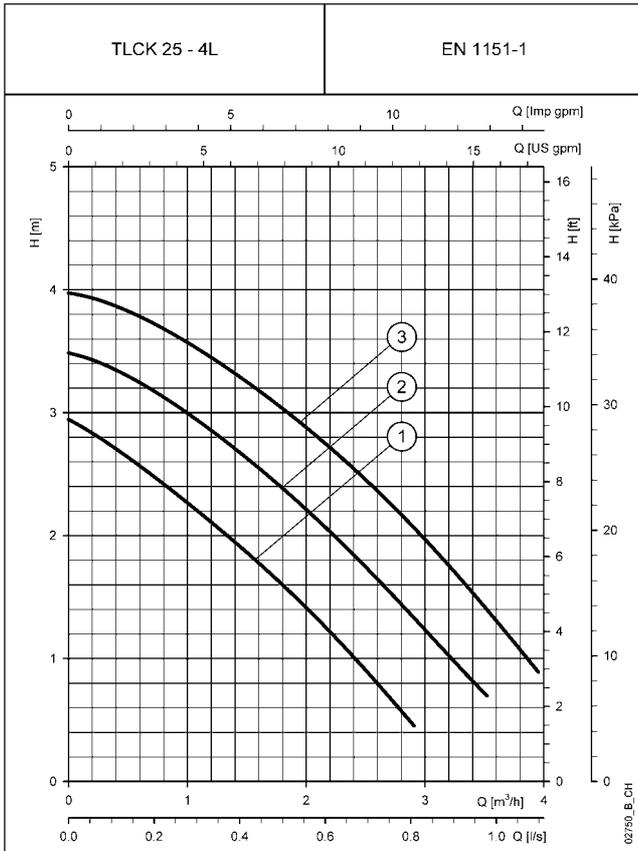

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.