



SV2 SERIES OPERATING CHARACTERISTICS AT 2900 rpm 50 Hz

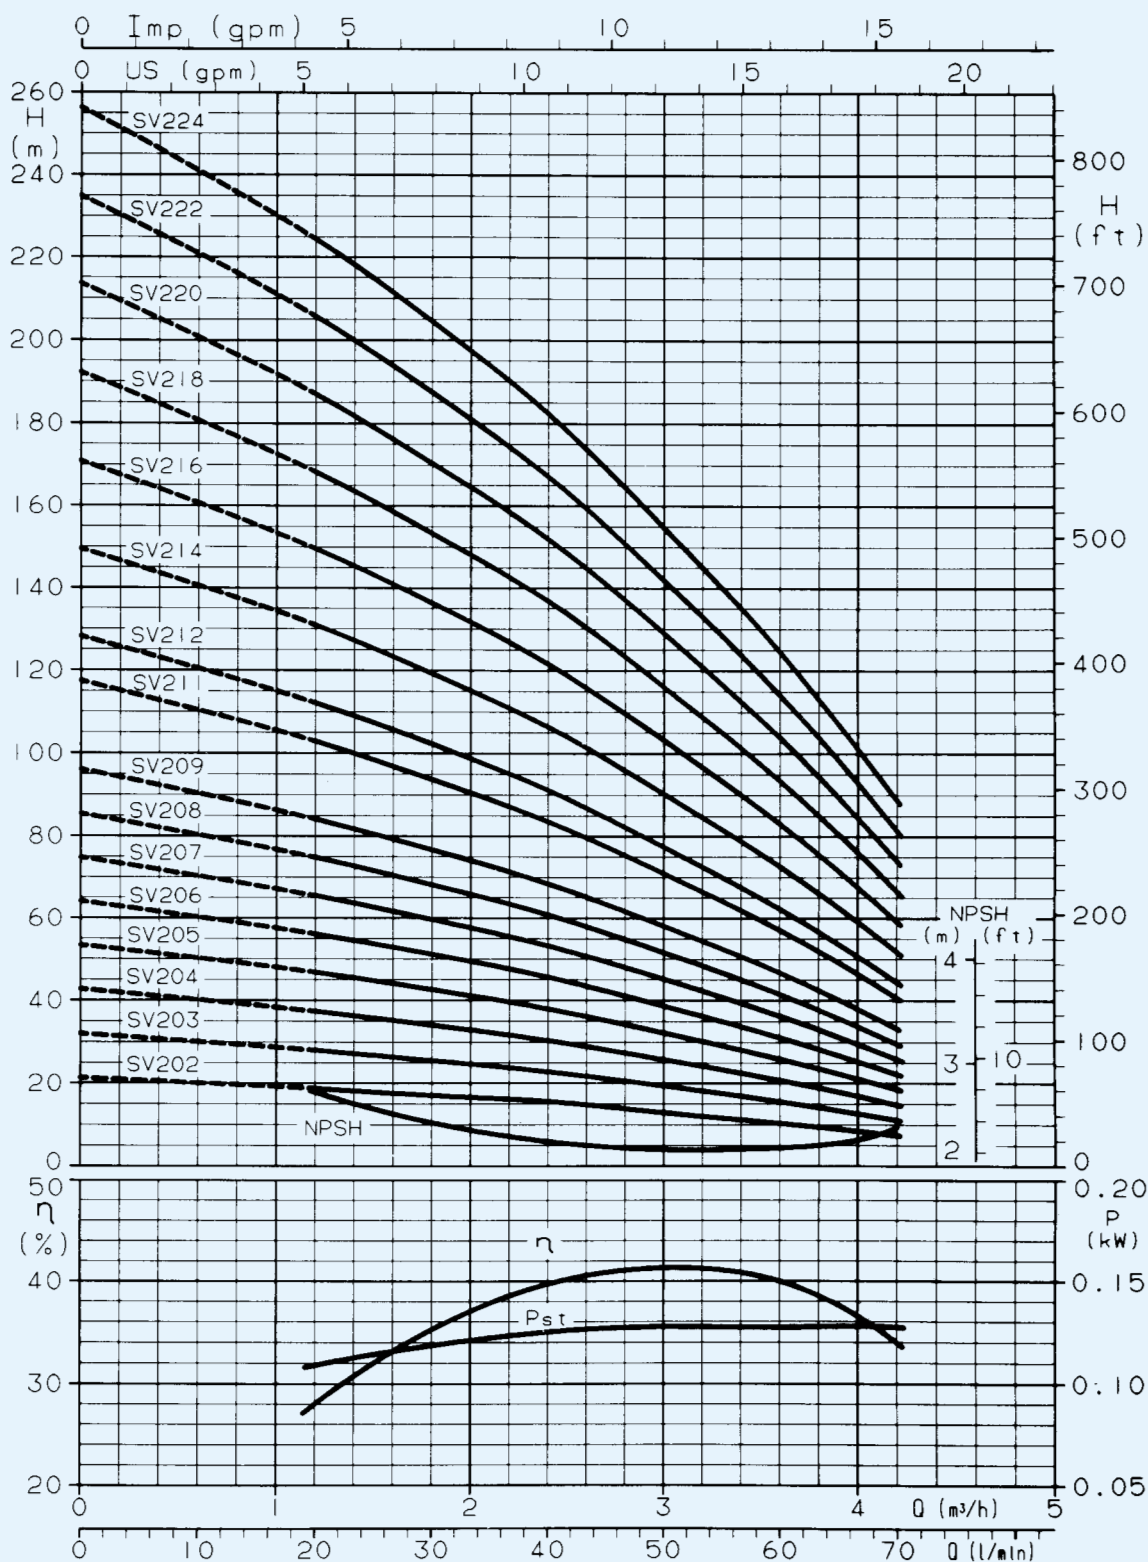


These performances are valid for liquids with density $\rho = 1.0 \text{ kg/dm}^3$ and kinematic viscosity $\gamma = 1 \text{ mm}^2/\text{sec}$.

SV4 SERIES OPERATING CHARACTERISTICS AT 2900 rpm 50 Hz

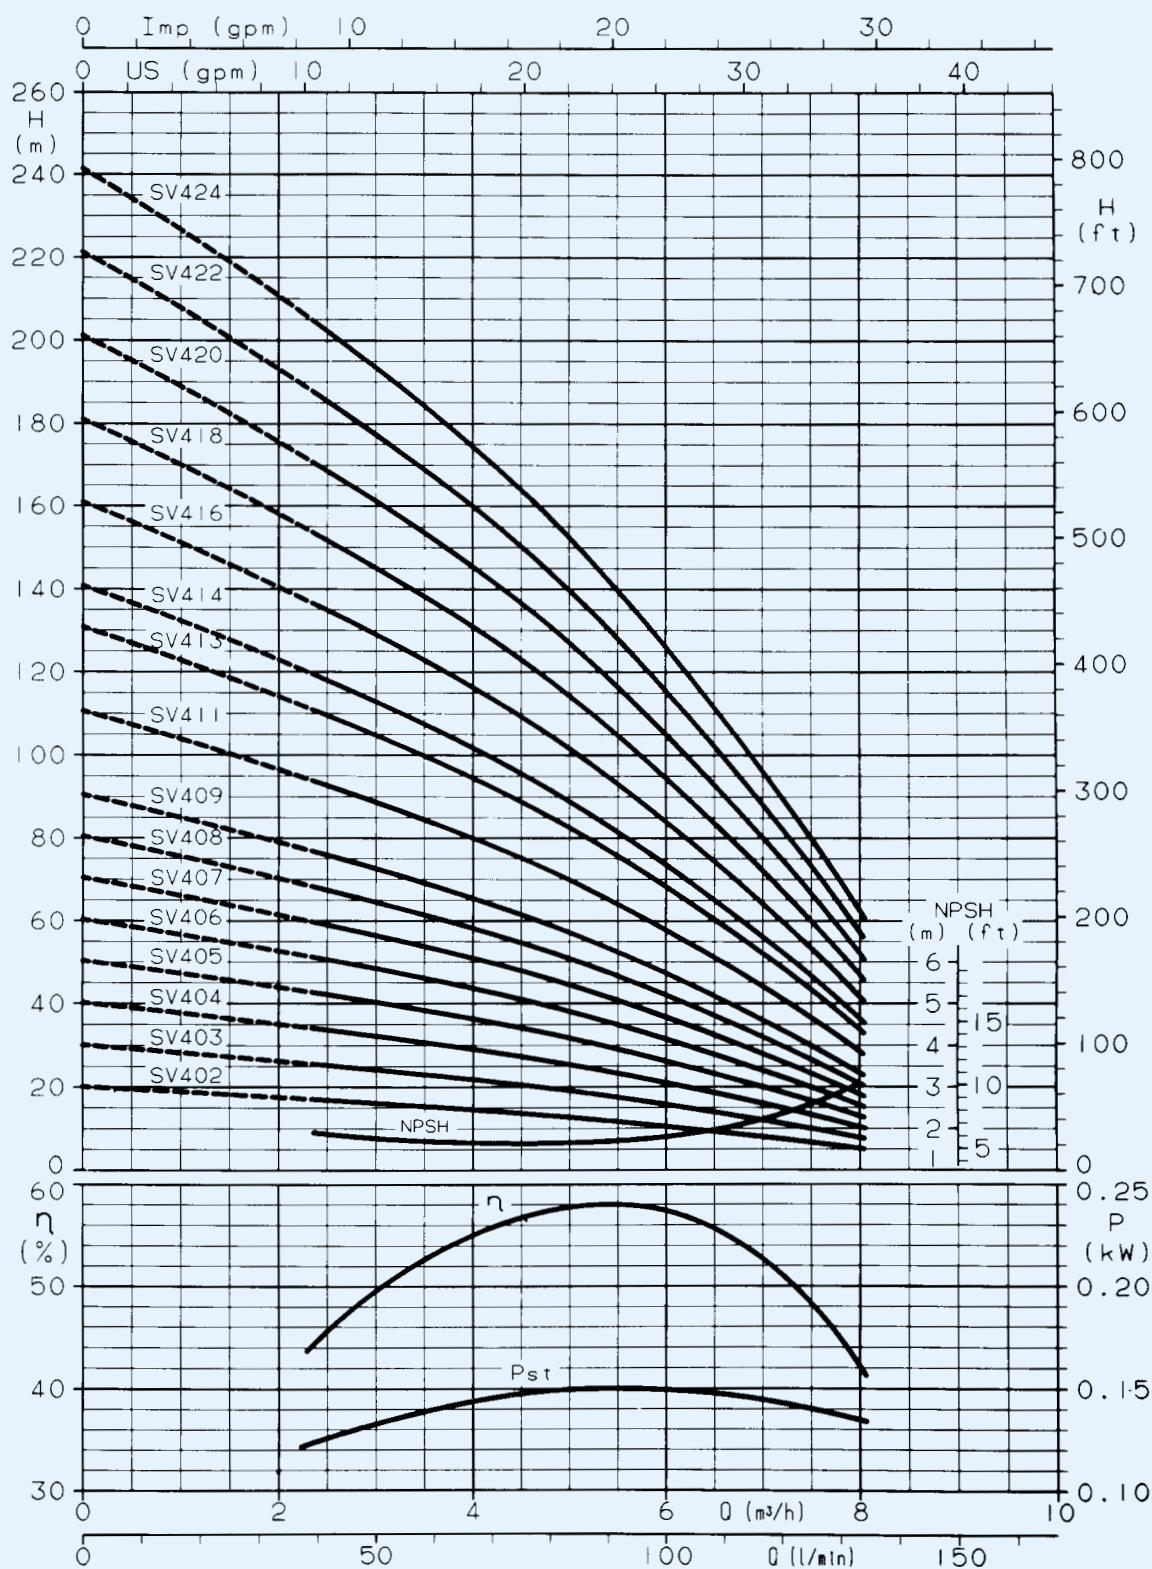


These performances are valid for liquids with density $\rho = 1.0 \text{ kg/dm}^3$ and kinematic viscosity $\gamma = 1 \text{ mm}^2/\text{sec}$.

SV8 SERIES OPERATING CHARACTERISTICS AT 2900 rpm 50 Hz

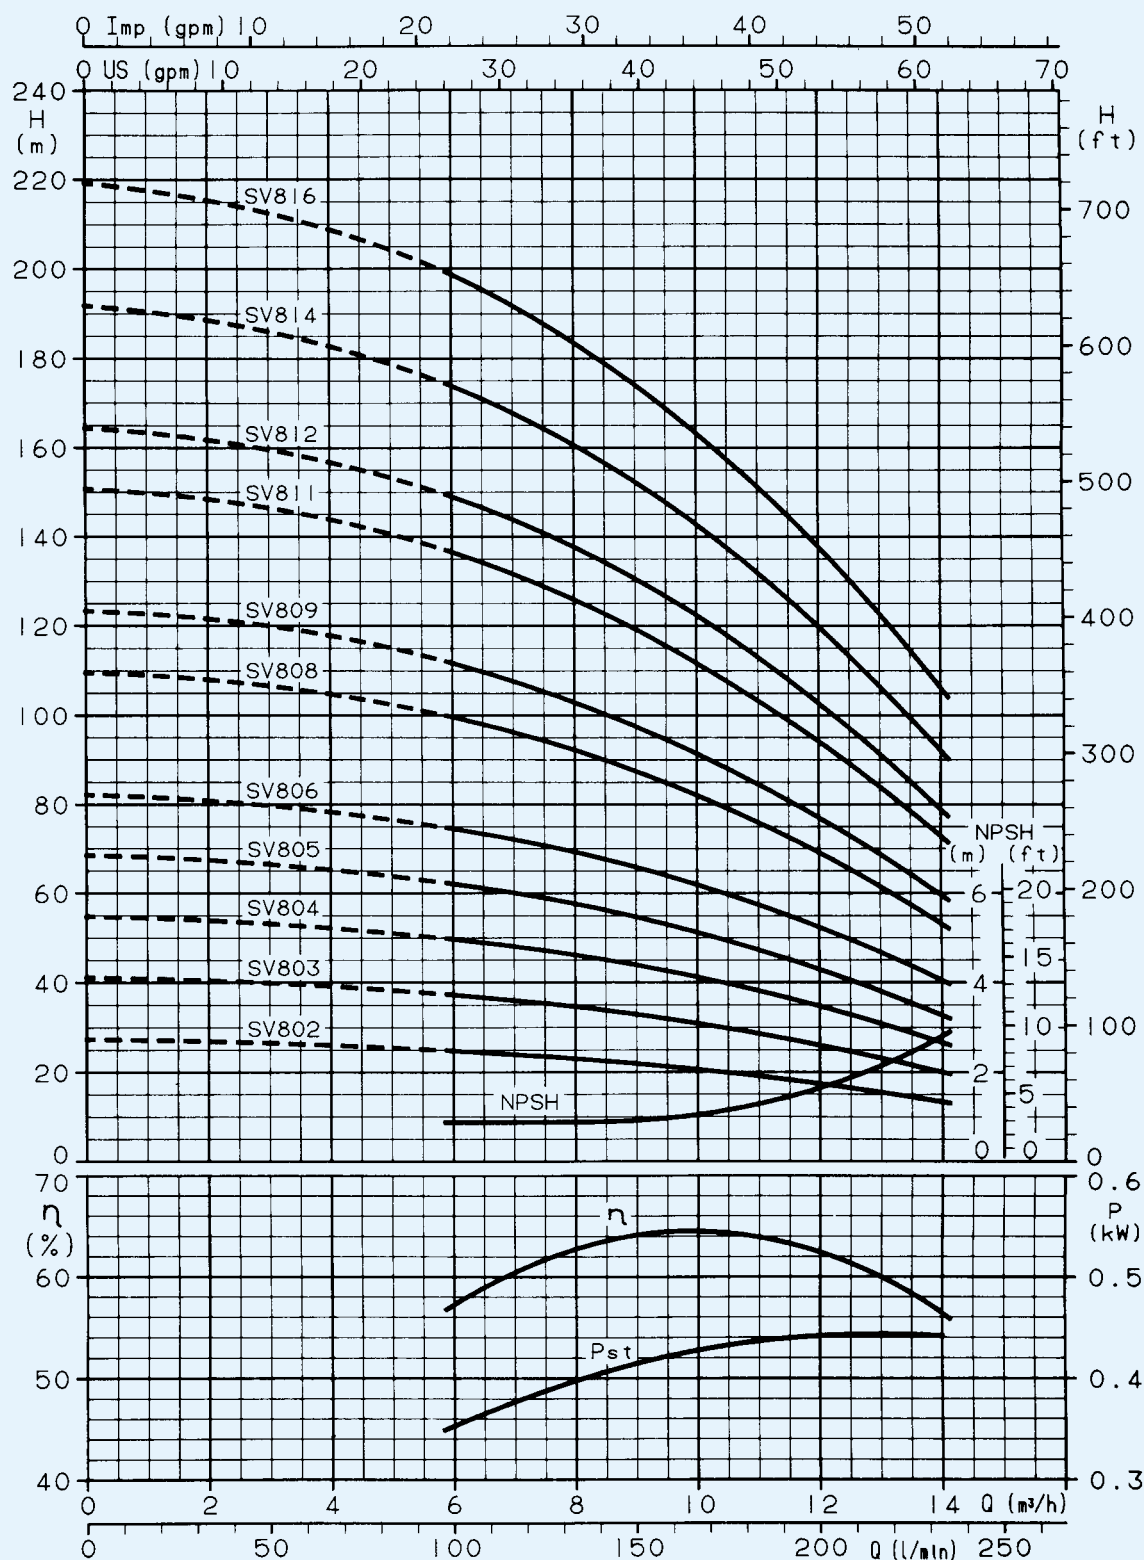


These performances are valid for liquids with density $\rho = 1.0 \text{ kg/dm}^3$ and kinematic viscosity $\gamma = 1 \text{ mm}^2/\text{sec}$.

SV16 SERIES OPERATING CHARACTERISTICS AT 2900 rpm 50 Hz

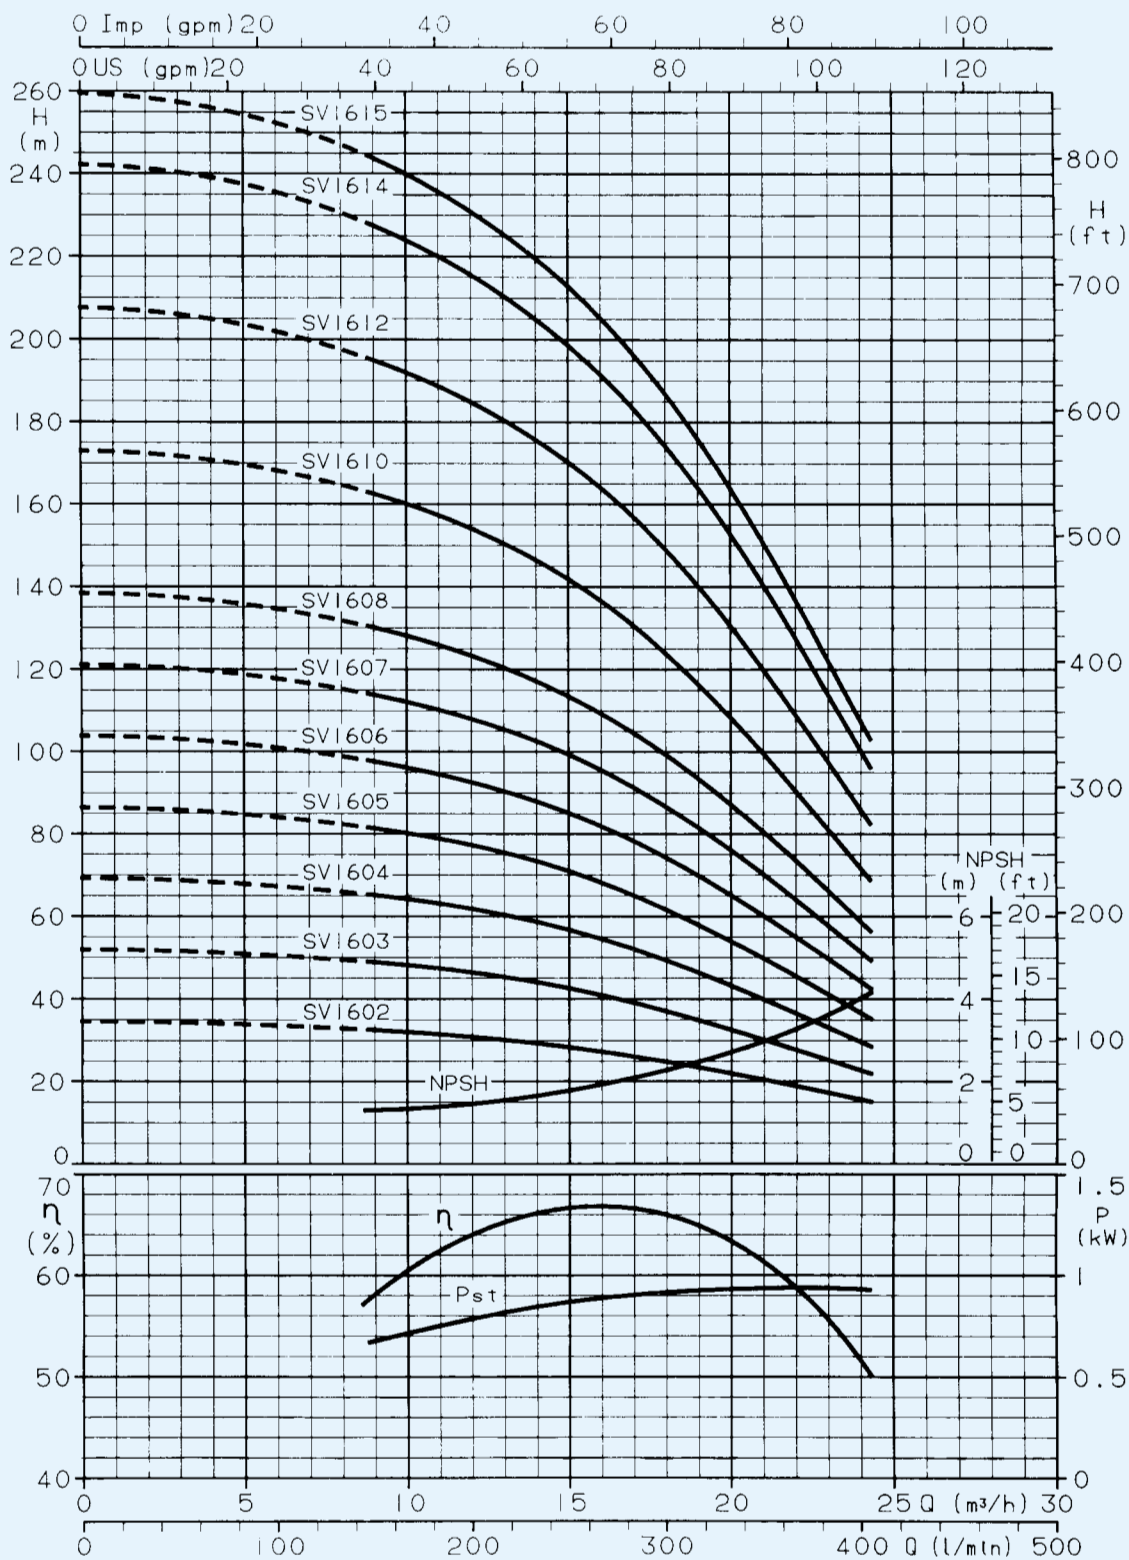


These performances are valid for liquids with density $\rho = 1.0 \text{ kg/dm}^3$ and kinematic viscosity $\gamma = 1 \text{ mm}^2/\text{sec}$.

SV30 SERIES OPERATING CHARACTERISTICS AT 2900 rpm 50 Hz

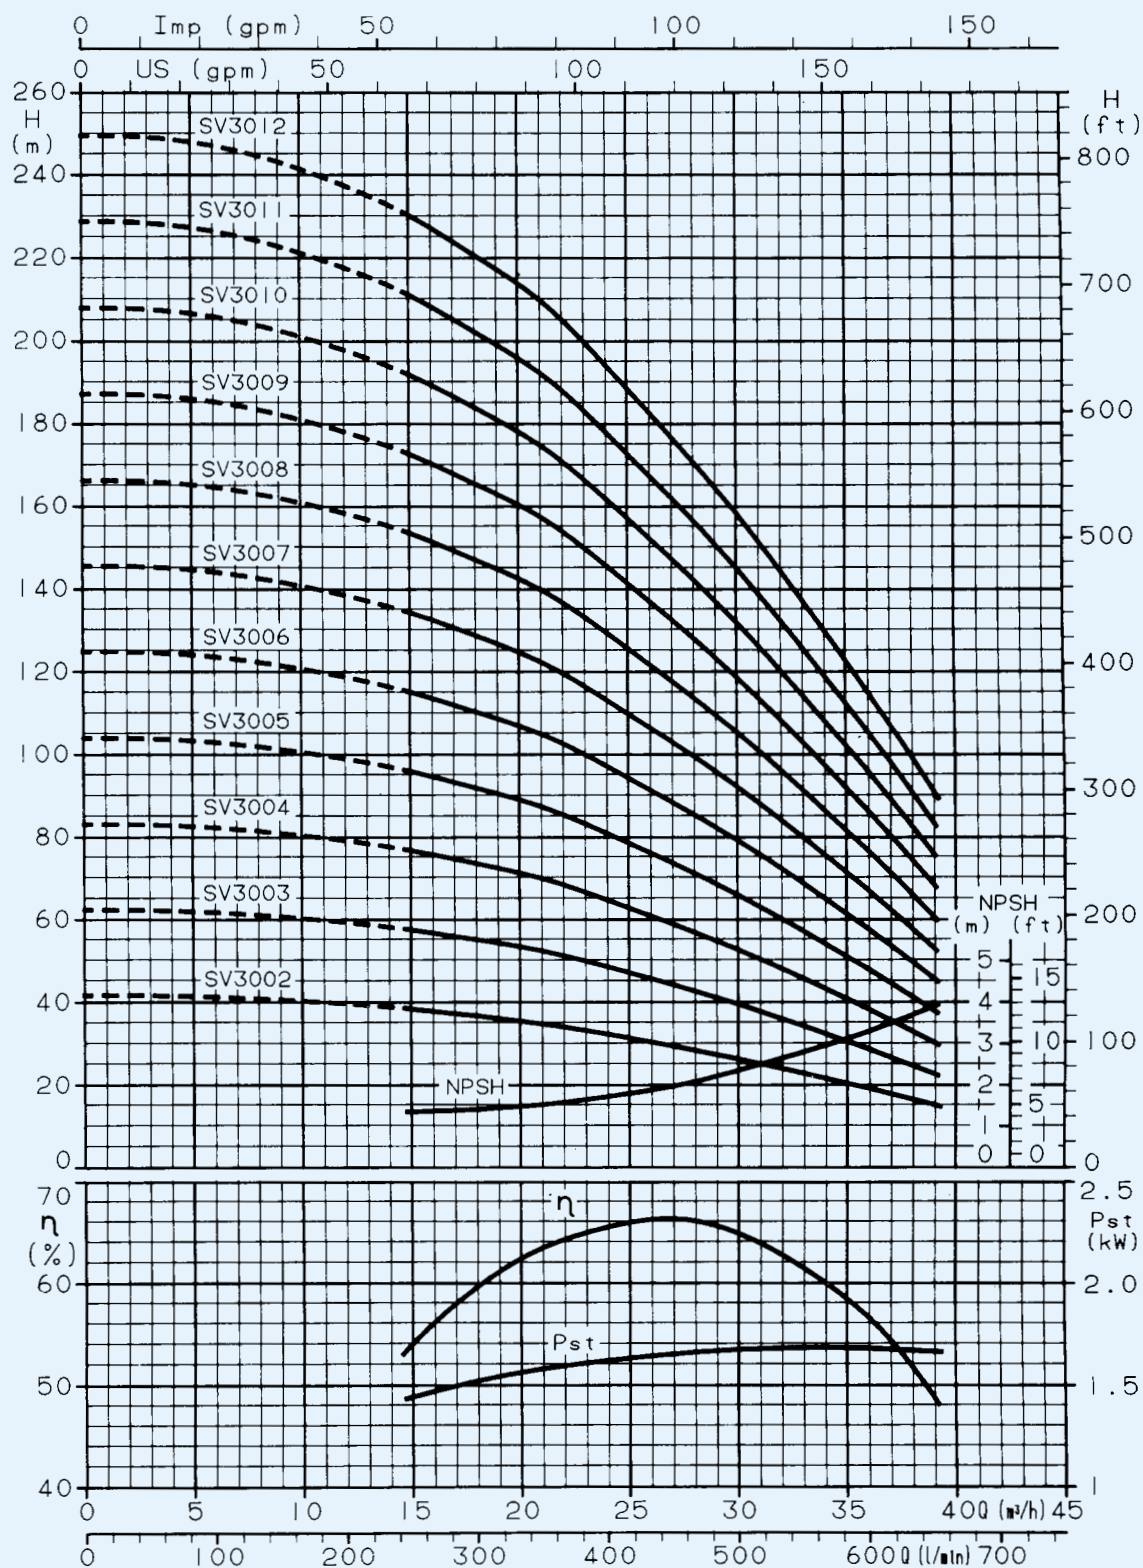

These performances are valid for liquids with density $\rho = 1.0 \text{ kg/dm}^3$ and kinematic viscosity $\gamma = 1 \text{ mm}^2/\text{sec}$.

SV60 SERIES OPERATING CHARACTERISTICS AT 2900 rpm 50 Hz

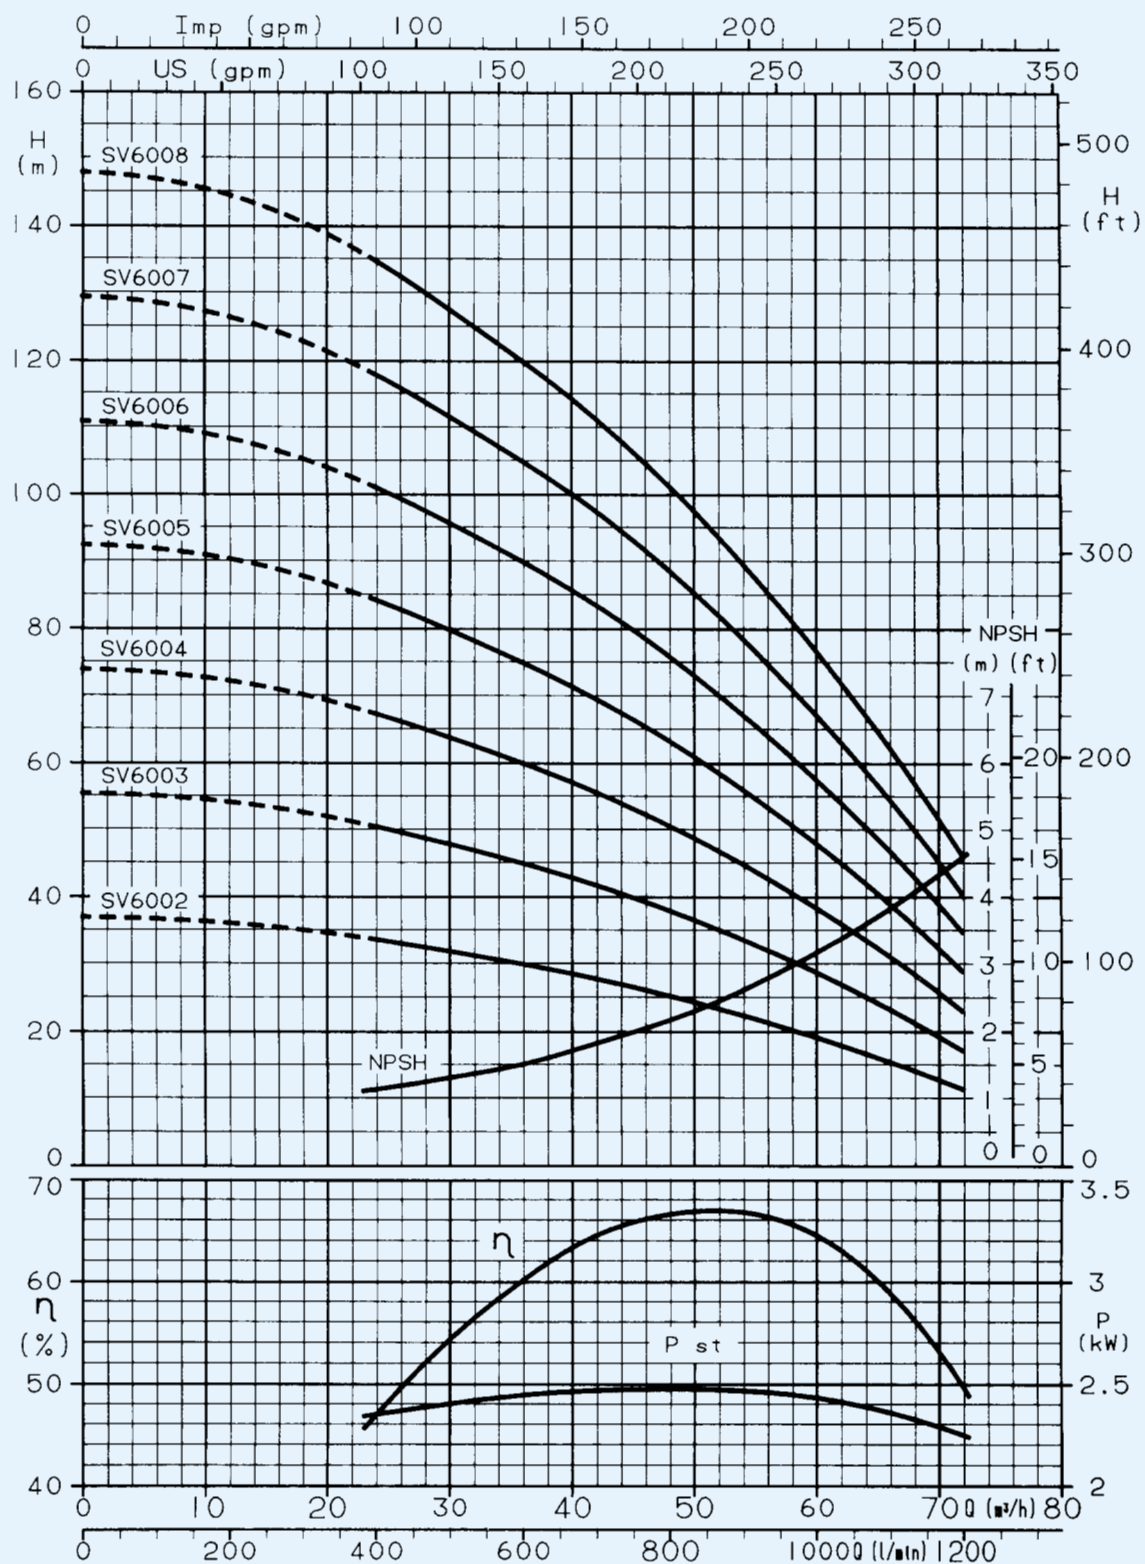

These performances are valid for liquids with density $\rho = 1.0 \text{ kg/dm}^3$ and kinematic viscosity $\gamma = 1 \text{ mm}^2/\text{sec}$.