


VIBRATION METER

Model : VB-8202

ISO-9001, CE, IEC1010

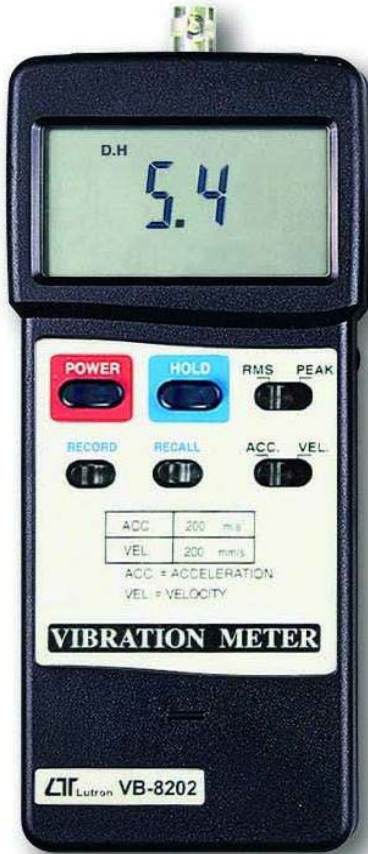

FEATURES

- * Applications for industrial vibration monitoring : All industrial machinery vibrates. The level of vibration is a useful guide to machine condition. Poor balance, misalignment & looseness of the structure will cause the vibration level increase, it is a sure sign that the maintenance is needed.
- * Separate vibration probe.
- * Frequency range 10 Hz - 1 kHz, sensitivity relative meet ISO 2954.
- * Professional vibration meter supply with vibration sensor, full set.
- * Velocity measuring range 200 mm/s.
- * Acceleration range 200 m/s² .
- * RMS & Peak measurement.
- * Data hold.
- * Memory function to record max. and min. reading with recall.
- * Complete set with hard carrying case.



Lutron

LUTRON ELECTRONIC

www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

The Art of Measurement

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲

VIBRATION METER

Model : VB-8202

FEATURES

* Professional vibration meter supply with vibration sensor, full set.	* Seperate vibration probe, easy operation
* Velocity range : 200 mm/s.	* RS 232 computer interface.
* Acceleration range : 200 m/s ² .	Optional data acquisition software software for data record & datalogger.
* RMS & Peak measurement, peak function to hold the peak value.	* Super large LCD display.
* Wide frequency range.	* Microcomputer circuit, high performance.
* Data hold button to freeze the desired reading.	* Auto shut off saves battery life.
* Memory function to record maximum and minimum readings with recall.	* Built-in low battery indicator.
	* Heavy duty & compact housing case.
	* Complete set with the hard carrying case.

SPECIFICATIONS

Display	61 mm x 34 mm supper large LCD display. 15 mm (0.6") digit size.	Data output	RS 232 serial output.
Measurement	Velocity, Acceleration, RMS value, Peak value, Data hold, Max. & Min. value.	Power supply	Alkaline or heavy duty type, DC 9V battery, 006P, MN1604 (PP3) or equivalent.
Range	<i>Velocity :</i> 200 mm/s : 0.5 to 199.9 mm/s <i>Acceleration :</i> 200 m/s ² : 0.5 to 199.9 m/s ²	Power consumption	Approx. DC 6 mA.
Frequency range	10 Hz to 1 KHz * <i>Sensitivity relative during the the frequency range meet ISO 2954</i>	Weight	Meter 230 g/0.50 LB Probe with sensing head 165 g/0.36 LB
Accuracy	± (5 % + 2 d), 160 Hz, 80 Hz @ 23 ± 5 °C	Dimension	<i>Meter :</i> 180 x 72 x 32 mm (7.1 x 2.8 x 1.3 inch). <i>Vibration probe :</i> Round 36 mm Dia. x 71 mm. <i>Sensing head :</i> 8.9 mm Dia x 42 mm length <i>Cable length :</i> 1.2 meter.
Calibration point	<i>Velocity :</i> 50 mm/s (160 Hz) <i>Acceleration :</i> 50 m/s ² (160 Hz)	Accessories included	Instruction manual..... 1 PC. Cable with plugs..... 1 PC. Vibration probe..... 1 PC. Sensing head..... 1 PC. Magnetic base..... 1 PC. Carrying Case..... 1 PC.
Circuit	Exclusive microcomputer circuit.	Optional accessories	* Software (Windows version, data record & data acquisition) SW-U801-WIN * RS232 cable UPCB-01
Data hold	Freeze the desired reading.		
Peak measurement	To measure the peak value. * Peak value = 1.414 RMS value.		
Memory	Maximum & Minimum value.		
Power off	Auto shut off, saves battery life, or manual off by push button.		
Sampling time	Approx. 1 second.		
Operating temperature	0 °C to 50 °C (32 °F to 122 °F).		
Operating humidity	Less than 80% RH.		

* Appearance and specifications listed in this brochure are subject to change without notice.

CAT-0304-VB8202