

Digital Differential pressure gauge

Model: MDF 10

Applications

- Pharmaceutical factory
- Cleanroom
- Fan test
- Ventilation system
- Air conditioning filtration system
- Filtration monitoring

Special features

- High and low alarm sound
- High and low, light alarm sound
- High accuracy and good stability sensor
- Multi pressure units range
- Ultra low power



Description


- **Accuracy class** 1%, 0.5% (option)
- **connection** G 1/4 - 4mm air nozzle
- **Permissible temperature** Ambient: -20 ... +60°C
Medium: -20...80 °C
- **Temperature compensation** 0...40 °C
- **Overload capacity** 7kPa(<2kPa range) 5* range (≥2kPa range)
- **Long-term stability** Typical: ± 0.25% FS / year
- **Zero temperature drift** Typical: ± 0.02% FS / °C , maximum ± 0.05%FS/ °C
- **Power supply** 3V: (2 AA batteries) 24VDC (option)
- **Working current** < 0.01mA (non-alarm)
- **Long-term stability** ± 0.25% FS/year
- **Measurement medium** Clean air
- **Protection** IP54

Differential pressure range selection

Model	Scale ranges	Model	Scale ranges
M1	0 ... 30 pa	M9	0 ... 500 pa
M2	-30 ... 30 pa	M10	-500 ... 500 pa
M3	0 ... 60 pa	M11	0 ... 1 kpa
M4	-60 ... 60 pa	M12	-1...1 kpa
M5	0 ... 125 pa	M13	0 ... 2.5 kpa
M6	-125 ... 125 pa	M14	-2.5 ... 2.5 kpa
M7	0 ... 250 pa	M15	0 ... 5 kpa
M8	-250 ... 250	M16	-5 ... 5 kpa
C	Customer should consult with the factory if has any special requirement		

MDF10 Differential pressure gauge

ORDERING CODE	Example:	MDF 10	M6	A	S	B	Note
please see the Differential pressure range selection							
Please specify			M6				
Accuracy							
A - 1%				A			
B - 0.5%							
C - 0.2%							
Out Put							
U - 4 ... 20 mA							
S - Sound alarm/ light alarm					S		
W - Without							
C - Customer							
Power Supply							
A - 85 ~ 250 VAC							
D - 24 VDC							
B - Battery power						B	
Z - Dual power (battery and 24 VDC)							
Other							

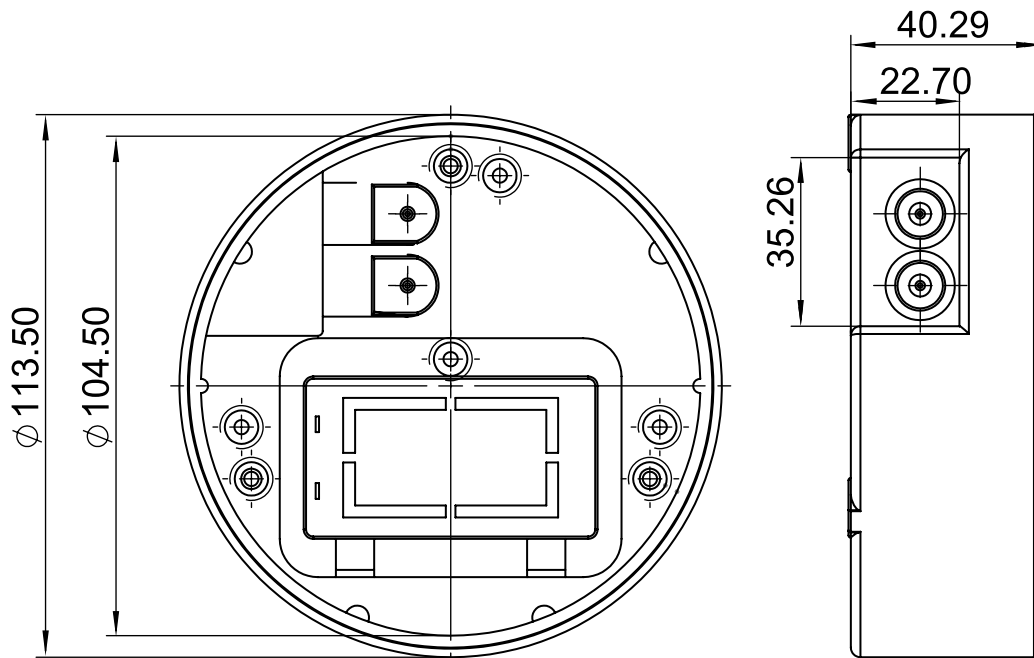



Address: 7191 Yonge street, Toronto, Canada

Tel: +16472221281(5 line)

Web: www.madecotech.com

Email: Info@madecotech.com