SWVS(D) Series

Stainless Steel Submersible Sewage Pumps

Performance Range

Maximum liquid temperature +40℃
PH level from 4-10
Maximum liquid density 1.2x10³kg/m³
Immersion depth from 0.5m-5m.

Applications

Industry use/agriculture/mining/construction/municipal/environmental protection
Suitable for draining water containing particles such short fibers,paper scraps.etc.
Ideal equipment for agricultural irrigation and draninage,pool silt cleaning and site construction,but do not apply to the location with explosion-proof requirements.

Features

Stainless steel casing and rod bolts,beautiful,durable and stable.
Opening impeller with good flow ability.
The stainless steel shaft extension,carbide double sides mechanical seal.

Material

Pump body:Cast iron (stainless steel on request)
Motor casing: Stainless steel(AISI 201)
Impeller: Cast iron
Motor Shaft: Stainless steel(AISI 316)

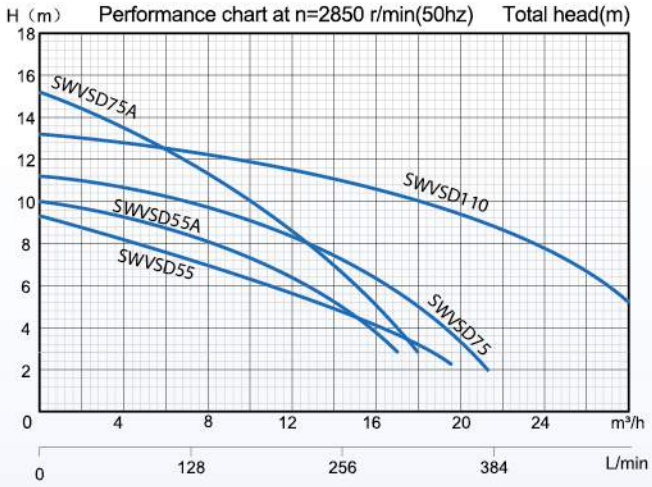

SWVS(D)

Model Single-Phase	Model Three-Phase	Power kW	Power HP	Outlet Inch	Max.Flow m³/h	Max.Head m	Solids Passage mm	Dim. mm	Weight (kg) G.W.	Weight (kg) N.W.	20' Loading Qty pcs
SWVSD55	-	0.55	0.75	2	18	10	40	260x190x480	17	16	1056
SWVSD75	-	0.75	1	2	21	12	40	260x190x500	19	18	1056
-	SWVS75	0.75	1	2	21	12	40	260x190x500	18.5	17.5	1056
SWVSD110	-	1.1	1.5	2	27	13	45	285x205x505	23	22	880
-	SWVS110	1.1	1.5	2	27	12	45	285x205x505	21	20	880
SWVSD55A	-	0.55	0.75	2	18	13	10	260x190x450	17	16	1320
SWVSD75A	-	0.75	1	2	20	15	10	260x190x470	19	18	1056
-	SWVS75A	0.75	1	2	20	15	10	260x190x470	18.5	17.5	1056

www.famcocorp.com
E-mail: info@famcocorp.com
@famco_group
Tel:۰۲۱-۴۸۰۰۰۰۴۹
Fax:۰۲۱ - ۴۴۹۹۴۶۴۲
تهران، کیلومتر۲۱ بزرگراه لشگری (جاده مخصوص کرج)
روبـروی پالایشگاه نفت پارس، پلاک ۱۲