

NK(m)


Muti-stage Submersible Pumps

Application Limits

- Max. ambient temperature < 40°C ;
- Sand content (in mass fraction) up to 0.01%;
- Hydrogen sulfide content up to 1.5mg/L, chloride ion content up to 400mg/L;
- pH 6.5 to 8.5;
- Maximum: 20 m below the static water table.

Advantages & Features

- Single phase motor equipped with start box which built in capacitor & current thermal protector, convenient for replacement;
- Built-in motor, the suction pump body
- Installation in 5" or larger boreholes.

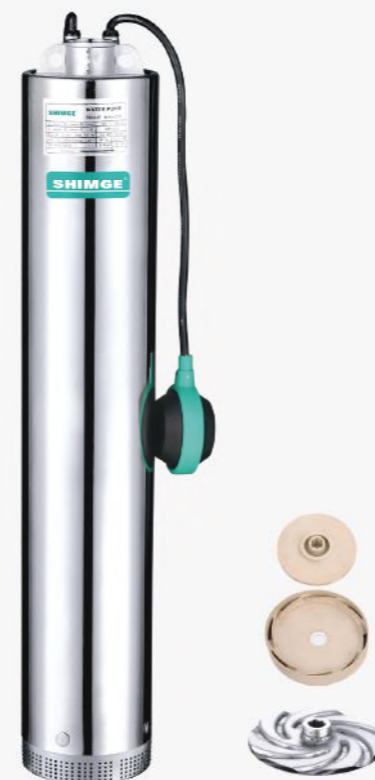

Performance Data

Model		Power		Flow										Head Range (m)	Packing Dim(mm) Pump(L×W×H)		G.W. (kg)	
Single-Phase	Three-Phase	kW	HP	m³/h	0	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4		Single-Phase	Three-Phase	Single-Phase	Three-Phase
220V	380V			l/min	0	20	30	40	50	60	70	80	70					
NKm3/3	-	0.55	0.75	H(m)	33	31	30	28	25	21	17	11	5	31~11	555x140x230	-	15	-
NKm3/4	NK3/4	0.75	1		44	42	40	37	34	30	24	18	10	42~18	615x140x230	555x140x230	16.5	15
NKm3/6	NK3/6	1.1	1.5		66	62	60	56	51	45	37	28	17	62~28	720x140x230	655x140x230	20	18
NKm3/8	NK3/8	1.5	2		88	83	79	74	68	60	50	38	22	84~38	830x140x230	725x140x230	24	19