



GENERAL CATALOGUE

 **PEDROLLO®**
... the spring of life



PEDROLLO S.p.A.

Via Enrico Fermi 7

37047 San Bonifacio (Verona) ITALY

paid-up capital € 40.000.000,00

Tel. +39 045 6136311

Fax +39 045 7614663

e-mail: sales@pedrollo.com

www.pedrollo.com



PERFORMANCE RANGE

- Flow rate up to **130 l/min** (7.8 m³/h)
- Head up to **50 m**

APPLICATION LIMITS

- Manometric suction lift up to **7 m**
- Liquid temperature between **-10 °C** and **+40 °C**
- Ambient temperature up to **+40 °C**
- Max. working pressure **6 bar**
- Continuous service **S1**

SAFETY STANDARDS

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS



INSTALLATION AND USE

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. As a result of their quietness, these pumps are widely used in domestic applications such as the distribution of water in combination with small and medium sized pressure sets, and for the irrigation of gardens and allotments, etc. The pump should be installed in an enclosed environment, or at least sheltered from inclement weather.

PATENTS - TRADE MARKS - MODELS

- Registered Community Design n° 342159-0006

OPTIONALS AVAILABLE ON REQUEST


- Other voltages or 60 Hz frequency

GUARANTEE

2 years subject to terms and conditions

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 1/min HS= 0 m

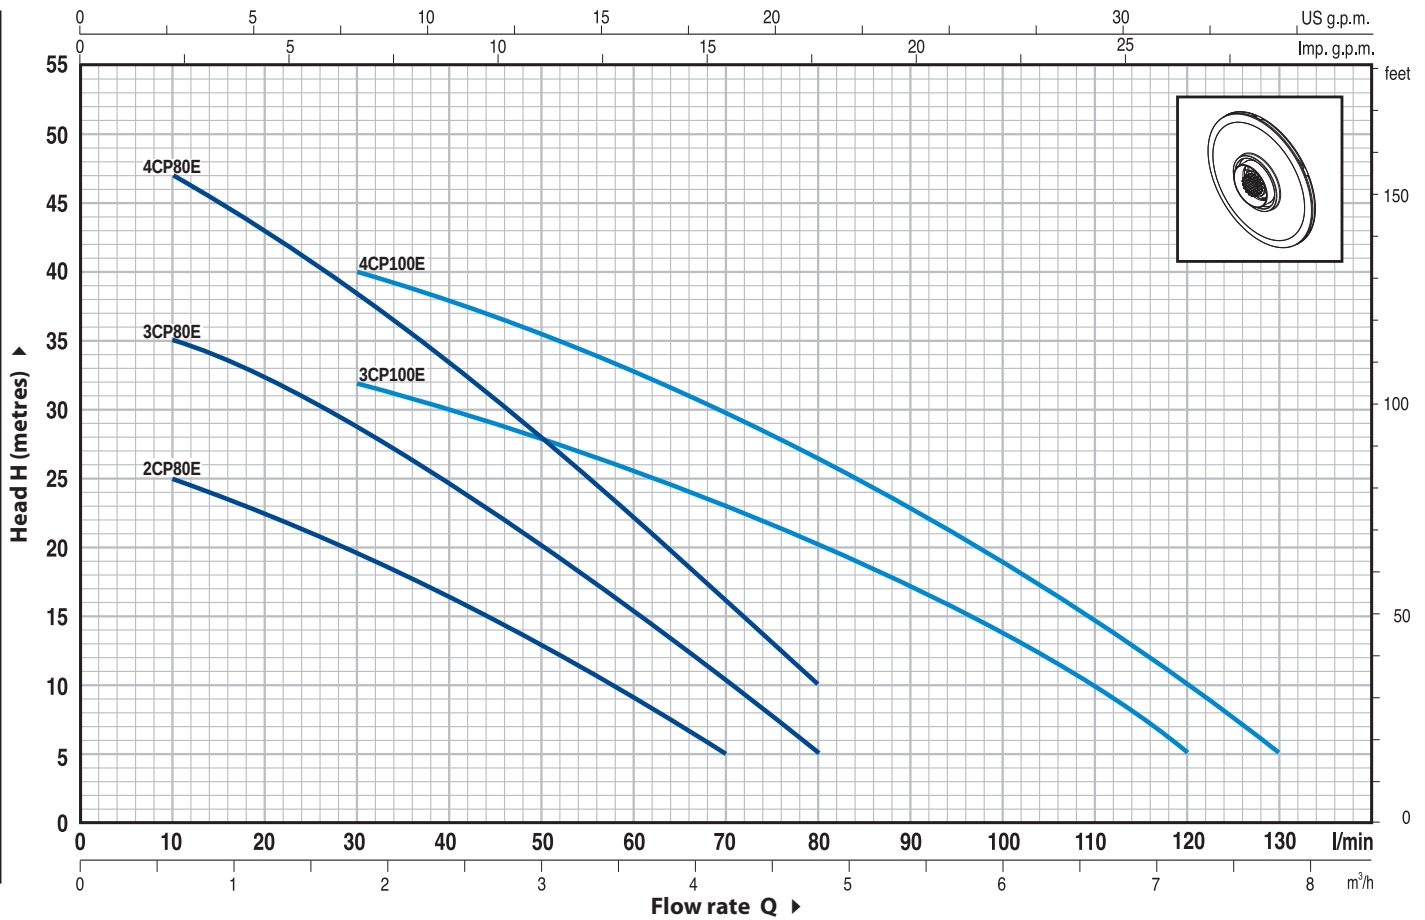


MODEL		POWER		Q	m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.2	7.8
Single-phase	Three-phase	kW	HP		l/min	0	5	10	15	20	25	30	40	50	60	70	80	90	100	110	120	130
2CPm 80E	–	0.37	0.50	H metres		27	26	25	24	22.5	21	20	16.5	13	9	5						
3CPm 80E	3CP 80E	0.45	0.60			38	36	35	34	33.5	31	29	25	20	15.5	10	5					
4CPm 80E	4CP 80E	0.60	0.85			50	48	47	45	43	40.5	38.5	33.5	28	22.5	16	10					
3CPm 100E	3CP 100E	0.60	0.85			36	35.5	35	34	33.5	32.5	32	30	28	26	23	20	17	13.5	10	5	
4CPm 100E	4CP 100E	0.75	1			46	45	44	43	42	41	40	38	35.5	33	30	26.5	22.5	19	15	10	5



Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 App. A.

POS. COMPONENT		CONSTRUCTION CHARACTERISTICS				
1	PUMP BODY	Cast iron, complete with threaded ports in compliance with ISO 228/1				
2	BODY BACKPLATE	Stainless steel AISI 304				
3	IMPELLERS	Noryl GFN2V				
4	MOTOR SHAFT	Stainless steel EN 10088-3 - 1.4104				
5	MECHANICAL SEAL	<i>Seal</i>	<i>Shaft</i>	<i>Materials</i>		
		<i>Model</i>	<i>Diameter</i>	<i>Stationary ring</i>	<i>Rotational ring</i>	<i>Elastomer</i>
		AR-13	Ø 13 mm	Ceramic	Graphite	NBR
6	BEARINGS	<i>Pump</i>	<i>Model</i>			
		2CPm 80E	6202 ZZ - C3 / 6201 ZZ			
		3CPm 80E				
		4CPm 80E				
		3CP 100E	6203 ZZ / 6203 ZZ			
		4CP 100E				
7	CAPACITOR	<i>Pump</i>	<i>Capacitance</i>			
		<i>Single-phase</i>	<i>(230 V or 240 V)</i>	<i>(110 V)</i>		
		2CPm 80E	10 µF 450 VL	25 µF 250 VL		
		3CPm 80E	12.5 µF 450 VL	30 µF 250 VL		
		4CPm 80E	14 µF 450 VL	30 µF 250 VL		
		3CPm 100E				
		4CPm 100E		60 µF 300 VL		
		8	ELECTRIC MOTOR	2-3-4CPm: single-phase 230 V - 50 Hz with thermal overload protector built-in to the winding. 2-3-4CP: three-phase 230/400 V - 50 Hz. ➡ Pumps fitted with the three-phase motor option offer IE2 (IEC 60034-30) class high performance – Insulation: F class. – Protection: IP 44.		

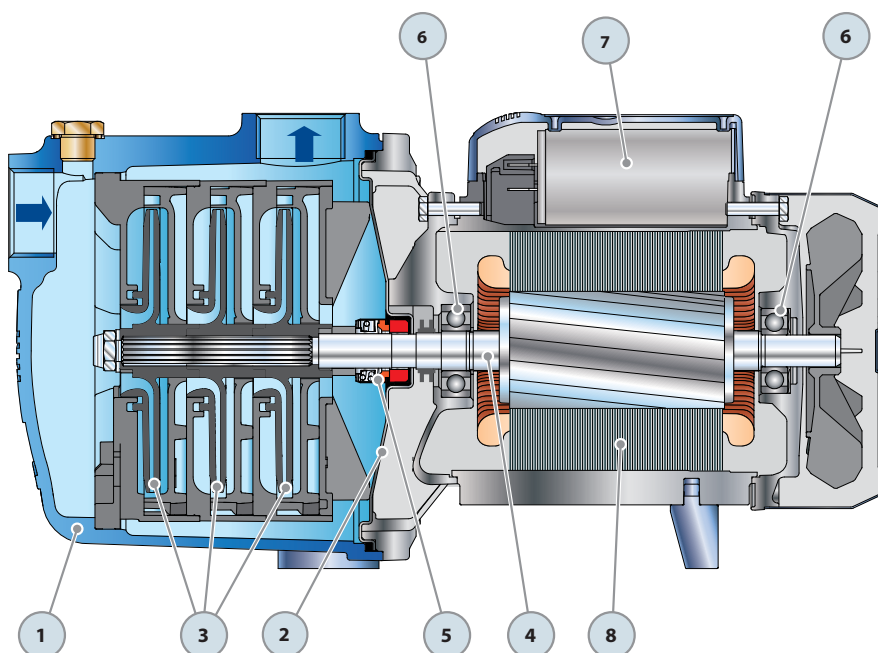

DIMENSIONS AND WEIGHT

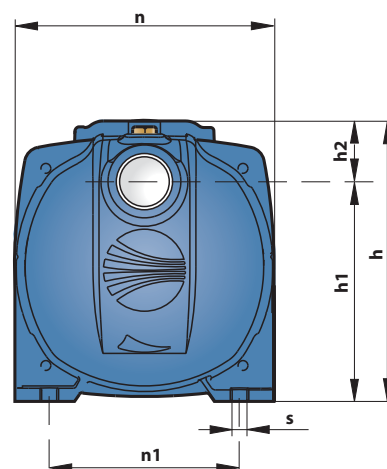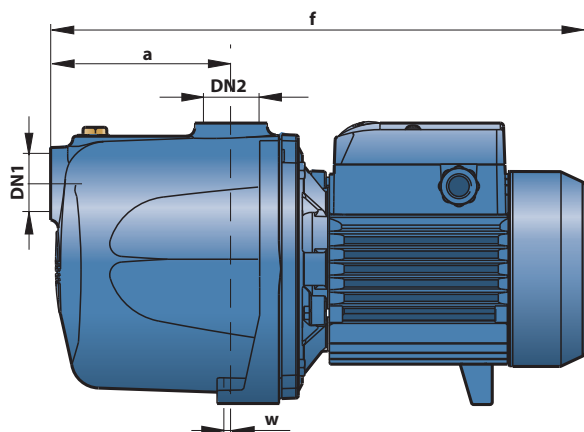

MODEL		PORTS		DIMENSIONS mm									kg	
Single-phase	Three-phase	DN1	DN2	a	f	h	h1	h2	n	n1	w	s	1~	3~
2CPm 80E	—	1"	1"	110	334	172	134	38	158	116	2	9	9.0	—
3CPm 80E	3CP 80E			135	357								9.8	9.3
4CPm 80E	4CP 80E												11.0	10.4
3CPm 100E	3CP 100E			110	334	191	61	10.4					9.9	
4CPm 100E	4CP 100E			135	378			13.7					12.7	

ABSORPTION

MODEL	VOLTAGE (single-phase)		
Single-phase	230 V	240 V	110 V
2CPm 80E	2.4 A	2.4 A	4.8 A
3CPm 80E	3.4 A	3.3 A	6.8 A
4CPm 80E	4.3 A	4.2 A	8.6 A
3CPm 100E	4.1 A	4.0 A	8.2 A
4CPm 100E	6.0 A	5.8 A	12.0 A

MODEL	VOLTAGE (three-phase)					
Three-phase	230 V	400 V	690 V	240 V	415 V	720 V
3CP 80E	2.5 A	1.4 A	0.8 A	2.4 A	1.4 A	0.8 A
4CP 80E	3.4 A	2.0 A	1.1 A	3.3 A	1.9 A	1.1 A
3CP 100E	3.1 A	1.8 A	1.0 A	3.0 A	1.7 A	1.0 A
4CP 100E	4.5 A	2.6 A	1.5 A	4.3 A	2.5 A	1.4 A

www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹


Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲

PALLETIZATION

MODEL		GROUPAGE			CONTAINER			
Single-phase	Three-phase	n° pumps	H (mm)	kg 1~ 3~	n° pumps	H (mm)	kg 1~ 3~	
2CPm 80E	–	98	1440	900 –	154	2180	1400 –	
3CPm 80E	3CP 80E	98	1440	980 930	154	2180	1530 1450	
4CPm 80E	4CP 80E	98	1440	1100 1040	154	2180	1710 1620	
3CPm 100E	3CP 100E	98	1440	1040 990	154	2180	1620 1540	
4CPm 100E	4CP 100E	98	1540	1360 1260	140	2140	1940 1800	

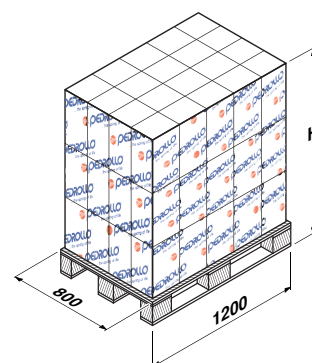



PERFORMANCE RANGE

- Flow rate up to **120 l/min** (7.2 m³/h)
- Head up to **50 m**

APPLICATION LIMITS

- Manometric suction lift up to **7 m**
- Liquid temperature between **-10 °C** and **+40 °C**
- Ambient temperature up to **+40 °C**
- Max. working pressure **6 bar**
- Continuous service **S1**

SAFETY STANDARDS

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS



INSTALLATION AND USE

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. As a result of their quietness, these pumps are widely used in domestic applications such as the distribution of water in combination with small and medium sized pressure sets, and for the irrigation of gardens and allotments, etc. The pump should be installed in an enclosed environment, or at least sheltered from inclement weather.

OPTIONALS AVAILABLE ON REQUEST


- Special mechanical seal
- Other voltages or 60 Hz frequency

GUARANTEE

2 years subject to terms and conditions

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 1/min HS= 0 m

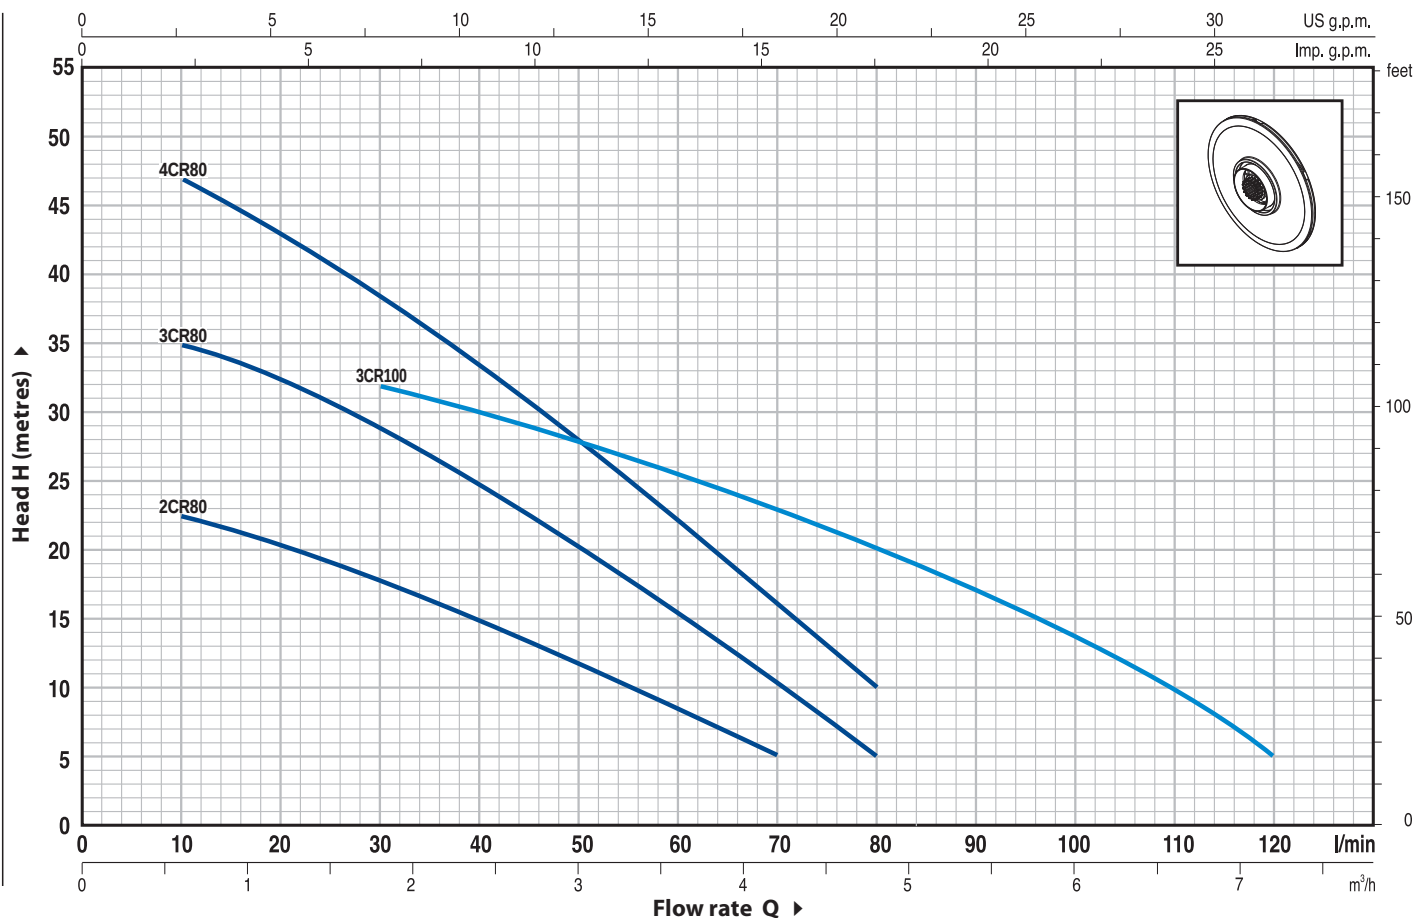


MODEL		POWER		Q																	
Single-phase	Three-phase	kW	HP		m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.2
					l/min	0	5	10	15	20	25	30	40	50	60	70	80	90	100	110	120
2CRm 80	-	0.37	0.50	H metres		25	24	22.5	21.5	20	19	17.5	15	11.5	8	5					
3CRm 80	3CR 80	0.45	0.60			38	36	35	34	32.5	31	29	25	20	15.5	10	5				
4CRm 80	4CR 80	0.60	0.85			50	48	47	45	43	40.5	38.5	33.5	28	22.5	16	10				
3CRm 100	3CR 100	0.60	0.85			36	35.5	35	34	33.5	32.5	32	30	28	25.5	23	20	17	13.5	10	5



Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 App. A.

POS. COMPONENT		CONSTRUCTION CHARACTERISTICS				
1	PUMP BODY	Stainless steel AISI 304, complete with threaded ports in compliance with ISO 228/1				
2	BODY BACKPLATE	Stainless steel AISI 304				
3	IMPELLERS	Noryl GFN2V				
4	MOTOR SHAFT	Stainless steel EN 10088-3 - 1.4104				
5	MECHANICAL SEAL	Seal	Shaft	Materials		
		Model	Diameter	Stationary ring	Rotational ring	Elastomer
		AR-13	Ø 13 mm	Ceramic	Graphite	NBR
6	BEARINGS	6202 ZZ- C3 / 6201 ZZ				
7	CAPACITOR	Pump	Capacitance			
		Single-phase	(230 V or 240 V)	(110 V)		
		2CRm 80	10 µF 450 VL	25 µF 250 VL		
		3CRm 80	12.5 µF 450 VL	30 µF 250 VL		
		4CRm 80 3CRm 100	14 µF 450 VL	30 µF 250 VL		
8	ELECTRIC MOTOR	2÷4CRm: single-phase 230 V - 50 Hz with thermal overload protector built-in to the winding. 2÷4CR: three-phase 230/400 V - 50 Hz. ⇒ Pumps fitted with the three-phase motor option offer IE2 (IEC 60034-30) class high performance – Insulation: F class. – Protection: IP 44.				

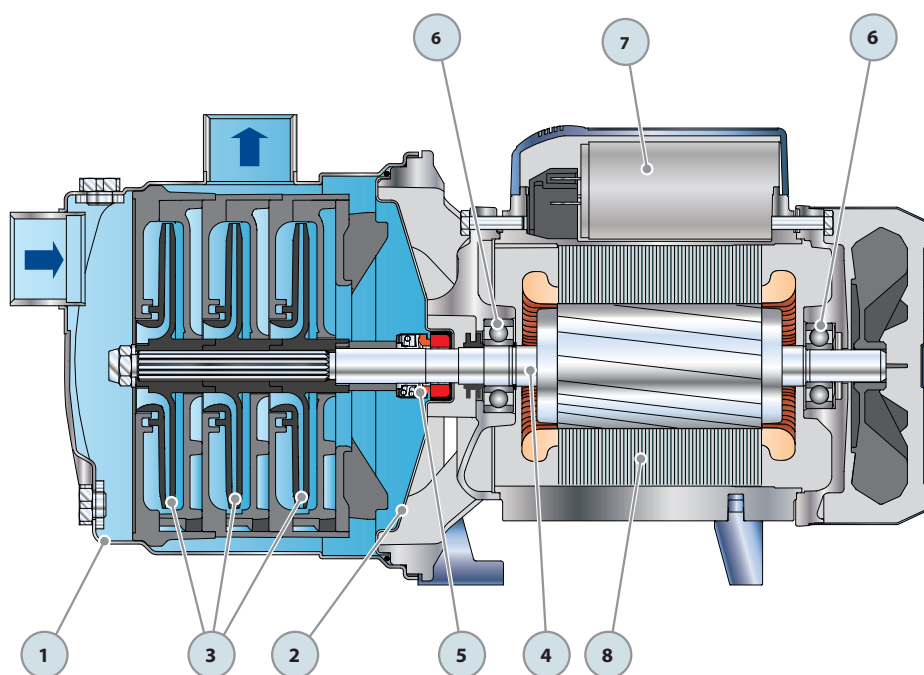

DIMENSIONS AND WEIGHT

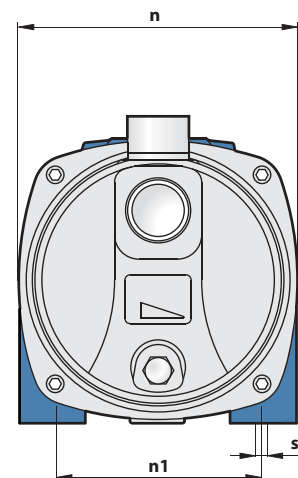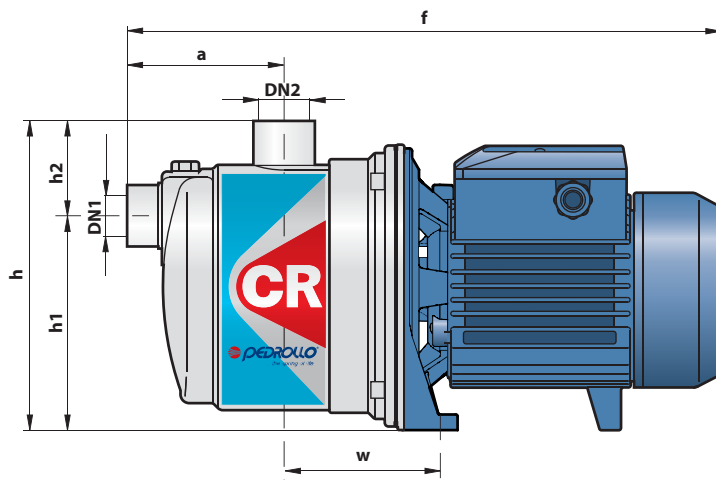

MODEL		PORTS		DIMENSIONS mm									kg	
Single-phase	Three-phase	DN1	DN2	a	f	h	h1	h2	n	n1	w	s	1~	3~
2CRm 80	–	1"	1"	90	345	174	122	52	160	120	88	9	5.9	–
3CRm 80	3CR 80												6.8	6.2
4CRm 80	4CR 80												7.3	6.8
3CRm 100	3CR 100												7.2	6.7

ABSORPTION

MODEL	VOLTAGE (single-phase)		
Single-phase	230 V	240 V	110 V
2CRm 80	2.4 A	2.4 A	4.8 A
3CRm 80	3.2 A	2.9 A	6.5 A
4CRm 80	4.0 A	3.6 A	8.0 A
3CRm 100	4.0 A	3.6 A	8.0 A

MODEL	VOLTAGE (three-phase)					
Three-phase	230 V	400 V	690 V	240 V	415 V	720 V
3CR 80	2.2 A	1.3 A	0.8 A	2.1 A	1.2 A	0.7 A
4CR 80	2.9 A	1.7 A	1.0 A	2.8 A	1.6 A	0.9 A
3CR 100	2.9 A	1.7 A	1.0 A	2.8 A	1.6 A	0.9 A

www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲

PALLETIZATION

MODEL		GROUPAGE				CONTAINER			
Single-phase	Three-phase	n° pumps	H (mm)	1~	3~	n° pumps	H (mm)	1~	3~
2CRm 80	–	98	1440	600	–	154	2180	930	–
3CRm 80	3CR 80	98	1440	690	630	154	2180	1070	970
4CRm 80	4CR 80	98	1440	730	680	154	2180	1140	1070
3CRm 100	3CR 100	98	1440	720	680	154	2180	1130	1050

