






Leaves nothing to be desired!

AquaCat SUPER













AquaCat SUPER

.000

⊗ w w w . f a m c o c o r p . c o m
 ⊃ E-mail: info@famcocorp.com
 ⊚ @famco_group

💽 Tel:071- ۴ Л о о о о ۴ ۹

تهران . کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرچ) روبـروی پالایشگاه نفت پارس ، پالک ۱۲





The AquaCat SUPER lives up to its promise. No matter what the situation, the cleaner can cope with it. The unit even detects obstacles on its path and will simply drive around them. It can be used for all pool shapes and surfaces up to 200 m². You can use the radio remote control for an individual control of the AquaCat SUPER and a systematic cleaning of polluted areas. Use the AquaControl box to select between the cleaning modes "Floor and walls" or "Floor only".


A large number of additional setting options and the short cleaning intervals render the AquaCat SUPER interesting also for hotel pools.

The SUPER is supplied complete with radio remote control, transport caddy, filter fittings and filter bag (suitable for machine washing).

The Easy Swivel system prevents a twisting of the float cable.

Your advantages at a glance:

- Also ideal for large pools
- Improved water quality
- Clean floor and wall surfaces
- Fast and effective
- Considerably reduced labour
- Customised cleaning programs
- Undisturbed privacy
- Reduced load on your filter system
- Improved recirculation of pool water
- Reduced consumption of water treatment agents
- The SUPER is almost maintenance-free
- Technical advice and service by your specialist dealer
- Technology from the market leader
- **TÜV/GS tested**

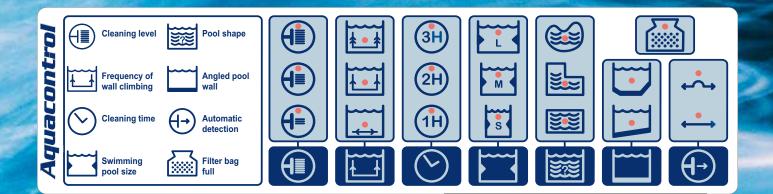

AquaCat SUPER	Art. no.: 1510-671-00
Delivery includes:	Suction robot, transport trolley with
	cable holder
For pool surfaces:	up to 200 m ²
Working voltage:	230 V AC 50-60Hz
Transformer:	DC 24 V
Power consumption:	120 W
Suction capacity:	16 m³/h
Length of float cable:	23 m
Program running time:	60 / 120 / 180 min optionally
Water temperature:	+15 °C to max. +35 °C
Max. immersion depth:	5 m
Min. immersion depth:	35 cm
Speed of run / floor:	approx. 14 m/min
Weight of unit incl. cable:	15.6 kg
TÜV/GS:	tested
Dimensions of cleaner with transport trolley:	54 x 50 x 55 cm (l x w x h)
Cleaning width:	31 cm



AquaControl box and radio remote control

dinotec GmbH

Water and Pool Technology Spessartstr. 7 D-63477 Maintal Phone: +49(0)6109-6011-0 Fax: +49(0)6109-6011-90 E-mail: mail@dinotec.de www.dinotec.de

- ⑧ w w w . f a m c o c o r p . c o m
 E-mail: info@famcocorp.com
 ⑧ @famco_group
- Tel:oYI- F A o o o o F 9
 Fax:oYI FF99F5FY

تهران، کیلومتر۲۱ بزرگراه لشگری (جاده مخصوص کرج) روبـروی پالایشگاه نفت پارس، پلاک ۱۲





AquaCat PRO - the powerhouse

AquaCat PRO with radio remote control, Fully automatic cleaning robot incl. transport trolley, 30 m cable,, with remote control, for pools up to 500 $m^{\rm 2}$ Art. no.: 1530-860-00

Brief description	spm. Fu 22 m³/h the robu The time Adaptati The Aqu	ly automatic cleaning of floor s removes any kind of dirt. Even st AquaCat PRO. er function is particularly useful. on to different pool sizes is eas aCat PRO does not require any	for public and private pools with a floor area of up to 500 paces for all pool shapes. The powerful cleaning capacity of bigger items, as are often found in public pools, will not stop It is used to fix start of work and duration of work. ily made via the display of the power supply. <i>y</i> supervision. The delivery includes the remote control and arge wheels even permit transport via stairs.
Description	AquaCa of 22 m ³ stop the The time Adaptati optimal a the displ regular / and fast cleaning Including	Fully automatic cleaning robot for cleaning of swimming pools with floor areas of up to 500 m ² . The AquaCat PRO is suitable for cleaning floor areas in all pool shapes. The powerful cleaning capacity of 22 m ⁹ /h removes any kind of dirt. Even bigger items, as are often found in public pools, will not stop the robust AquaCat PRO. The timer function is particularly useful. It is used to fix start of work and duration of work. Adaptation to different pool sizes is easily made via the display of the power supply. To ensure an optimal adaptation to your pool, there are several options available for an easy programming via the display. Individual settings like cleaning times, switch-on delay times, cleaning level (light / regular / heavy-duty), pool length or pool lining (concrete, plastic, rough or smooth tiles) are simple and fast to program on site. The operation display provides more information about the remaining cleaning time and displays error messages. Including corrosion-resistant, stable transport trolley made of aluminium. For storage and a proper drying of the cleaner all around. Convenient and safe transport of the AquaCat PRO to the place of use.	
Technical data	Power c Suction Length c Running Cleaning for swim Cleaning Delay tir Cleaning Pool size Pool size Remote Immersie Water te	bltage (in pool): capacity: of floating cable: speed / floor: g capacity designed ming pool surfaces: g times, adjustable: ne, adjustable: g level, adjustable: g (length) selectable: ng selectable:	220/230 V / AC 50/60 Hz 24 V DC 180 W 22 m³/h 30 m approx. 17.2 m/min up to 500 m² 3, 5 or 7 hours 2 or 3 hours light / regular / heavy-duty 15, 20 or 25 m concrete, plastic, rough tiles, smooth tiles standard equipment 4 m 10° to 35° C 13 kg
🛞 w w w . famcocorp.com	Tel:۰۲۱- ۴ ۸ ۰ ۰ ۰ ۰ ۴ ۹	سُکّری (جادہ مخصوص کرج)	تهران ، کیلومتر ۲۱ بزرگراه لن
E-mail: info@famcocorp.com Image: transform of the second	Fax:011 - ۴۴۹۹۴۶۴۲	بارس، پلاک ۱۲	تهران، کیلومتر ۲۱ بزرگراه له روبـروی پالایشگاه نفت پ کوبـروی پالایشگاه نفت پ





Technical data	Weight of transport trolley with Commander box, approx.: Weight of unit with floating cable, control box and transport trolley approx.: Filter mesh: Protection class unit: Protection class control box: Dimensions:	17 kg 30 kg approx. 15 microns IP 68 IP 67	
	Cleaner with transport trolley: Suction robot: Cleaning width:	96 x 54 x 98 cm (lxwxh) 54 x 40 x 32 cm (lxwxh) 54 cm	
Use	Swimming pool cleaner suitable for	or pool areas of up to 500 m².	
Accessories	1610-991-00 Cover made of polyar	nide fabric,	
Spare parts	1610-984-00 Inlet valve for filter fittings		
	1610-983-00 Filter fittings complete		
	1610-982-00 Filter bag complete fo	or AquaCat PRO	
	1610-981-00 Special PVA brush (M	lagic-Klett-Brush)	
	1610-980-00 Drive track, blue		
	1610-880-00 Propellers		
This may be interesting for you	1510-671-01 AquaCat SUPER mit vollautomatischer Rei Easy-Filter-Service, ir	EFS inigungsroboter für Boden- und Wandflächen, 23 m Kabel mit nkl. Transport-Caddy und Funkfernsteuerung, für	
	1530-850-00 AquaCat MAX mit Fur vollautomatischer Rei Funkfernsteuerung, fü	nkfernbedienung inigungsroboter inkl. Transportwagen, 45 m Kabel mit ür Schwimmbecken bis 1250 m²	

dinotec GmbH Water and Pool Technology

Spessartstrasse 7 63477 Maintal/Germany

Tel: Fax: Hotline: E-Mail: Internet:

∂ w w w . f a m c o c o r p . c o m
 ⊃ E-mail: info@famcocorp.com
 @ @famco_group

Tel:oPI- ۴ Л о о о о к ч
 Fax:oPI - ккччкуки

Subject to technical changes. Errors excepted. Photo of item may be different. Do you have any questions? Our hotline will be happy to help.

Status: 12.01.18

تهران ، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج) روبـروی پالایشگاه نفت پارس ، پلاک ۱۴

Simply enjoy the best water!