Hoppt Reversible Plate Compactors





CPT150P/CPT200P/CPT200D/CPT300P/CPT400D


Reversible Plate Compactors

The Hoppt range of reversible plate compactors offers dual direction and provides ease of control with optimum compaction ability. The iron base plate is designed for maximum stability during operation, and to ensure smooth forward and reverse motion.

Features and Benefits


- Low noise and fuel efficient Honda petrol or Hatz diesel engines makes the best engine choice
- Side panels have been redesigned to increase the amount of airflow while protecting the engine compartment
- Centrally located lifting hook to ensure safe lifting of the compactor
- Dual directional travel, increases the manoeuvrability of the heavy duty compactor
- Easily removable side extension plates (CPT400D)
- Easy access to throttle control


Specifications	CPT150P	CPT200P	CPT200D	CPT300P	CPT400D	
Operating Weight – (kg)	138	183	197	300	395	
Plate Size – L x W (mm)	650 x 500	700 x 600		800 x 470 (Extended 800 x 640	910 x 650 (Extended 900 x 690)	
Vibration Frequency – Hz		90 (5,400vpm)		70 (4,200vpm)		
Centrifugal Force - kgf	3,059 (30KN)			4078 (40KN)	5099 (50.0KN)	
Max Working Speed	22 m/min	23 m/min		22m/min	26 m/min	
Max Gradeability (°)	25	30		30		
Engine	Honda GX160	Honda GX270	HATZ® 1B20 @ 3.5kW (4.6hp) Diesel	Honda GX270 6.3kW 4 Stroke Petrol	HATZ® 1B40 @ 7.3kW (9.3hp) Diesel	





afamco_group





تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبـروی یالایشگاه نفت یـارس، یلاک ۱۲





Hoppt Box Plate Compactor

Featuring forward exciter and centre handle



CPT87B


87kg Box Plate Compactor

The CPT87B box-type compactor offers greater compaction for various jobs. Heavy weight and durable design to ensure reliability under all working conditions.

Features and Benefits


- HONDA GX200 Engine
- Centre handle for ease of use
- Lifting Hook
- The large box style base plate not only increases the compacted area, but it also ensures stability
- Carrying/ Tie down handles
- Low Vibration Handle
- Lifelong lubricated bearings for extended service life


Specifications for CPT87B				
Dimension - LxWxH (mm)	1100 x 500 x 810			
Operating Weight (kg)	87			
Plate size –LxW (mm)	500 x 500 (640 x 500 o/d)			
Vibration Frequency (Hz)	98			
Centrifugal Force (KN)	15.2			
Compaction Area (m2/h)	780			
Compaction Depth (mm)	350			
Max Gradeability (°)	30			
Max Working Speed (m/min)	26			
Engine Options	Honda GX200 @ 4.1kW(5.5hp) 4 stroke Petrol			





@famco_group





تهران، کیلومتر۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبـروی پالایشگاه نفت پـارس، پلاک ۱۲





Hoppt Box Plate Compactor



CPT80B

86kg Box Plate Compactor

The CPT80B is designed to minimize segregation problems and promote homogeneity of material and air void distributions within the compacted layers. The CPT80B box-type compactor offers greater compaction for various compaction works.

Features and Benefits

- Heavy weight and durable design to ensure reliability under all working conditions
- The large box style base plate not only increases the compacted area, but it also ensures stability
- Carrying handles
- Low Vibration Handle
- Lifelong lubricated bearings for extended service life

Specifications for CPT80B	
Dimension - LxWxH (mm)	930 x 440 x 860
Operating Weight (kg)	86
Plate size - DxW (mm)	490 x 440
Vibration Frequency (Hz)	94
Centrifugal Force (KN)	15.0
Compaction Area (m2/h)	550
Compaction Depth (mm)	350
Max Gradeability (°)	20
Max Working Speed (m/min)	25
Engine Options	Honda GX160 @ 3.6kW(4.8hp) 4 stroke Petrol

- 🔞 w w w . f a m c o c o r p . c o m
- 🔁 E-mail: info@famcocorp.com
- @famco_group

- (Tel:071- F A 0 0 0 0 F 9
- (a) Fax:011 FF99F5FF

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبــروی پالایشگاه نفت پـارس، پلاک ۱۲






Hoppt Plate Compactor

CPT60W/CPT90PII/CPT75P


Forward Plate Compactors

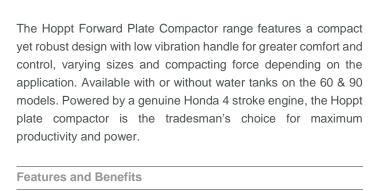




- Heavy weight and durable design to ensure reliability under all working conditions
- Travel wheels for greater mobility
- Lifting point for easy transportation
- Low Vibration folding handle for greater comfort and control
- Reinforced base for added durability

Specifications	CPT60W	СРТ90РП	СРТ75Р		
Dimension - LxWxH (mm)	665x360x1,080	1,100x500x993	980x450x1090		
Operating Weight (kg)	66	95	75		
Plate size - DxW (mm)	510 x 360	590 x 500	520 x 420		
Vibration Frequency (Hz)		94			
Centrifugal Force (KN)	10.5	15.4	14.5		
Water Tank Capacity	6 (optional)	9 (optional)	N/A		
Compaction Depth (mm)	200	350	300		
Max Gradeability (°)	20				
Max Working Speed (m/min)	25				
Engine (Petrol)	Honda GX120 – 4 stroke	Honda GX160 – 4 stroke	Honda GX200 – 4 stroke		



E-mail: info@famcocorp.com

@famco_group



Fax:011 - # 499 # 5 # 1

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج) روبـروی یالایشگاه نفت یـارس، یلاک ۱۲