



www.rato-europe.com



www.famcocorp.com
E-mail: info@famcocorp.com
@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹
Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)
روبروی پالایشگاه نفت پارس، پلاک ۱۲



RATO in Europe



**CENTRALIZED
EUROPEAN WAREHOUSE**



**AUTHORIZED
SERVICE NETWORK
(SALES/SERVICE)**



FAST ORDER PROCESSING




FAST SHIPMENTS

RATO, one of the most important Chinese manufacturers of gasoline engines, lands in Europe to offer customers fast delivery from stock and to create its own distribution network for sales and assistance. Rato Europe has been set up as a strategic hub in the heart of Europe to stock and quickly ship our entire range of products.

Rato Europe manages an optimal supply system to guarantee a complete safety stock of all Rato products, spare parts and accessories.

Rato Europe also has its own network of official authorized distributors across the whole of Europe. They offer assistance and technical support as well as selling Rato branded products.

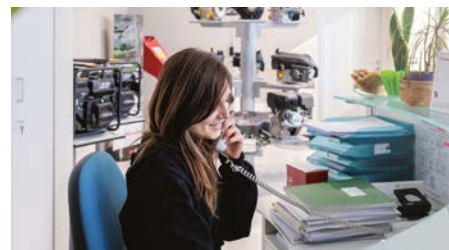

RATO Europe HEADQUARTER:
Via Don Minzoni, 6D/E
42044 Gualtieri (Reggio Emilia) Italy
E-mail: info@rato-europe.com
www.rato-europe.com



RATOSERVICE
comes **TO YOU!**



- REPAIR
- TECHNICAL SUPPORT
- WARRANTY CLAIM
- SPARE PARTS
- REPLACEMENT ENGINES



ENJOY our
AFTER-SALES
SERVICE

FULL STOCK and SERVICE SUPPORT



INVERTER GENERATOR

FAMCO
هایپر صنعت



EUROPEAN STAGE 5
EXHAUST EMISSIONS
COMPLIANT

HAPPINESS comes from THE CREATION

Little, super-quiet, single-phase portable generators. Perfect for RVs, camping, little huts, pedlars or in all situations where electricity and, at the same time, silence are needed. With the "Inverter" system, it is possible to vary Rpm engine.



Excellent structural design for better heat dissipation with lighter weight.



www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱-۴۸۰۰۰۰۴۹

Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲

R700i



R1250iS-4



	R700i	R1250iS-4
Engine model	R56-i	R60-i
Engine type	Air-cooled, 4-Stroke, OHV, Single cylinder	Air-cooled, 4-Stroke, OHV, Single cylinder
Starting system	Recoil	Recoil
Displacement	56 cc	60 cc
Bore x Stroke	45 x 35 mm	45 x 38 mm
Compression ratio	8.2 : 1	8.2 : 1
Rated frequency	50 Hz	50 Hz
Rated voltage	230 V	230 V
Rated power	0.7 kW	1 kW
Max power	0.8 kW	1.1 kW
DC output	12 V / 3 A	12 V / 5 A
Fuel tank capacity	3.2 L	2.6 L
Full load continuum running time	4 h	3.5 h
1/2 load continuum running time	6 h	5.5 h
Noise (7m)	70 dB	61 dB
Dimensions (L x W x H)	336 x 327 x 306 mm	420 x 240 x 380 mm
Net weight	12 kg	14 kg



R2000iS-C



R2000iS-C

With parallel function

Engine model	R80-i2
Engine type	Air-cooled, 4-Stroke, OHV, Single cylinder
Starting system	Recoil
Displacement	79.7 cc
Bore x Stroke	48.6 x 43 mm
Compression ratio	8.8 : 1
Rated frequency	50 Hz
Rated voltage	230 V
Rated power	1.6 kW
Max power	1.8 kW
DC output	12 V / 8.3 A
Fuel tank capacity	3.5 L
Full load continuum running time	3.5 h
1/2 load continuum running time	5.2 h
Noise (7m)	65 dB
Dimensions (L x W x H)	420 x 280 x 420 mm
Net weight	17.5 kg

Silenced generators INVERTER
with parallel function.



R3000iE-R

Multi-function control panel.



Double-handle-bar design for easy transportation.



Handle-bar for transportation.

Wheel kit



ELECTRIC STARTER

R3000iE-R

With parallel function

Engine model	R210D-Vi
Engine type	Air-cooled, 4-Stroke, OHV, Single cylinder
Starting system	Electric / Electric
Displacement	212 cc
Bore x Stroke	70 x 55 mm
Compression ratio	9 : 1
Rated frequency	50 Hz
Rated voltage	230 V
Rated power	3.2 kW
Max power	3.5 kW
DC output	12 V / 8.3 A
Fuel tank capacity	8.3 L
Full load continuum running time	5 h
1/2 load continuum running time	8.5 h
Noise (7m)	66 dB
Dimensions (L x W x H)	590 x 456 x 511 mm
Net weight	45 kg

Silenced generators INVERTER with parallel function.

Parallel kit



R1250iS-3



R2000iS-2




	R1250iS-3 With parallel function	R2000iS-2 With parallel function
Engine model	R60-i	R80-i
Engine type	Single cylinder, 4-Stroke (OHV)	Single cylinder, 4-Stroke (OHV)
Starting system	Recoil starter	Recoil starter
Displacement	60 cc	79,7 cc
Bore x Stroke	45 x 38 mm	48,6 x 43 mm
Compression ratio	8.2 : 1	8.7 : 1
Rated frequency	50 Hz	50 Hz
Rated voltage	230 V	230 V
Rated power	1.0 kW	1.6 kW
Max power	1.1 kW	1.95 kW
DC output	12 V / 5 A	12 V / 8.3 A
Fuel tank capacity	3 L	4.2 L
Full load continuum running time	4 h	3.5 h
1/2 load continuum running time	6 h	6 h
Noise (7m)	68 dB	68 dB
Dimensions (L x W x H)	460 x 270 x 390 mm	510 x 300 x 475 mm
Net weight	14 kg	23.5 kg / 24.5 kg

Silenced generators with parallel function.

Parallel kit



Trolley kit

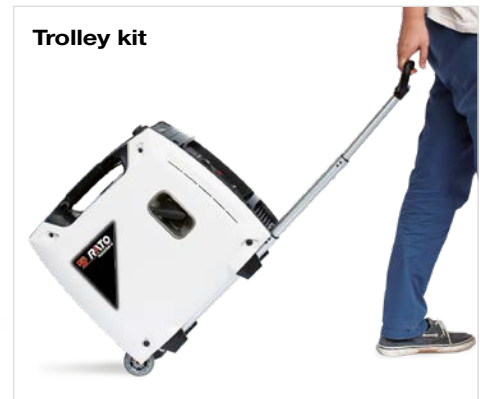

R3000iE-2



Multi-function control panel.



ELECTRIC STARTER

R3000iE-2

With parallel function

Engine model	R210-i
Engine type	Single cylinder, 4-Stroke (OHV)
Starting system	Recoil / Electric starter
Displacement	212 cc
Bore x Stroke	70 x 55 mm
Compression ratio	9.0 : 1
Rated frequency	50 Hz
Rated voltage	230 V
Rated power	3.0 kW
Max power	3.3 kW
DC output	12 V / 8.3 A
Fuel tank capacity	10 L
Full load continuum running time	5 h
1/2 load continuum running time	8.5 h
Noise (7m)	69 dB
Dimensions (L x W x H)	645 x 480 x 500 mm
Net weight	46 kg

Silenced generators with parallel function.



Parallel kit



Double-handle-bar design for easy transportation. Wheel kit.



Power Solution *for You!*



EASY STARTING



**LOWER NOISE
AND VIBRATION**



**LOWER FUEL
CONSUMPTION**



**EASY
MAINTENANCE**



**EUROPEAN STAGE 5
EXHAUST EMISSIONS
COMPLIANT**



**MARCATURA
COMUNITÀ EUROPEA**



**ROHS 2
COMPLIANCE**





RATO Europe:
Via Don Minzoni, 6D/E
42044 Gualtieri (Reggio Emilia) Italy
E-mail: info@rato-europe.com

www.rato-europe.com

www.famcocorp.com
E-mail: info@famcocorp.com
[@famco_group](https://www.instagram.com/famco_group)

Tel: ۰۲۱-۴۸۰۰۰۰۴۹
Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)
روبروی پالایشگاه نفت پارس، پلاک ۱۲