

# GENERAL GOLD

## AIR CONDITIONERS



# 2023

## CATALOGUE

General-Gold.ir





ECO & T3  
CONTROL  
AMPERE  
LEVELS

خنک نگه داشتن شما، حتی در نزدیکی آتشفشان  
تحمل دما تا 65 درجه سانتی گراد



ECO & T3  
SCROLL  
COMPRESSOR



T3 | R410A | GMCC



Ampere Control



Inverter



T3



Healthy Filter



Refrigerant



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name	GG-TS12000 TITANUM	GG-TS18000 TITANUM	GG-TS24000 TITANUM
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Amper Levels(L1,L2,L3)	2A , 3A , 4A	3A , 4A , 6A	4A , 6A , 8A
<b>Cooling</b>			
Capacity(Btu/h)	12000	18000	24000
Rated current(A)	/	/	/
EER(W/W)	2.4	2.4	2.4
<b>Heating</b>			
Capacity(Btu/h)	12500	18500	24500
Rated current(A)	/	/	/
COP(W/W)	3.60	3.60	3.60
<b>Compressor &amp; Features</b>			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	SANYO
Indoor air flow(m3/h)	680	810	1350
Indoor sound level(dB(A))	28	31	36
Refrigerant type	R410A	R410A	R410A
Loading Qty(40HQ)	255	177	120
<b>Indoor unit</b>			
Dimensions(W*D*H)	820*306*195	920*306*195	1100*333*222
Net weight(KG)	9.5	10.5	15
<b>Outdoor unit</b>			
Dimensions(W*D*H)	795*305*549	853*349*602	967*421*803
Net weight(KG)	24.5	30	59
Number of rows radiator	1	2	2



T3 | R410A | GREE



Ampere Control



Inverter



T3



WiFi



Refrigerant



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

**Model name**

**GG-GS30000 PORSCHE**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Amper Levels(L1,L2,L3)

L1 (4A) - L2 (9A) - L3(12A)

**Cooling**

Capacity(Btu/h)

30000

Rated current(A)

/

EER(W/W)

3.22

**Heating**

Capacity(Btu/h)

30700

Rated current(A)

12.5

COP(W/W)

3.22

**Compressor & Features**

Type

ROTARY

Brand

GREE

Indoor air flow(m3/h)

1350

Indoor sound level(dB(A))

52

Refrigerant type

R410A

Loading Qty(40HQ)

108

**Indoor unit**

Dimensions(W\*D\*H)

1078\*333\*246

Net weight(KG)

15

**Outdoor unit**

Dimensions(W\*D\*H)

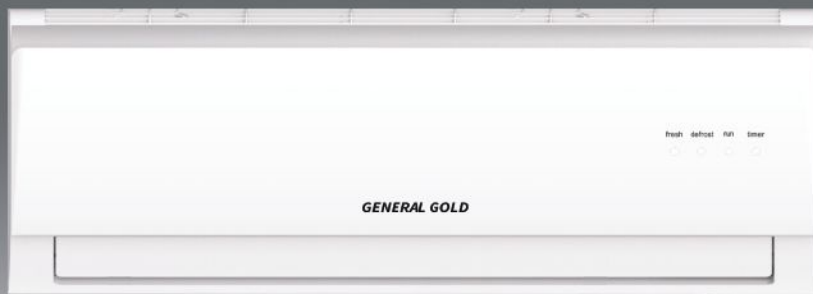
1000\*746\*427

Net weight(KG)



52.5

Number of rows radiator

2



R410A | GMCC

-   
Refrigerant
-   
High Efficiency
-   
Timer Mode
-   
Healthy Filter
-   
Operation in low temperature
-   
Golden Fin
-   
Turbo Mode
-   
Rapid Cooling
-   
Quiet
-   
4-Way auto Swing

Model name	GG-MS12000 PLATINUM	GG-MS18000 PLATINUM	GG-MS24000 PLATINUM
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
<b>Cooling</b>			
Capacity(Btu/h)	12000	18000	24000
Rated current(A)	5.2	7.71	10
EER(W/W)	2.81	2.81	3.01
<b>Heating</b>			
Capacity(Btu/h)	12500	18000	27000
Rated current(A)	5.0	7	10
COP(W/W)	3.21	3.01	3.41
<b>Compressor &amp; Features</b>			
Type	ROTARY	ROTARY	ROTARY
Brand	<b>GMCC</b>	<b>GMCC</b>	<b>GMCC</b>
Indoor air flow(m3/h)	575	810	1000
Indoor sound level(dB(A))	28	34	33
Refrigerant type	R410A	R410A	R410A
Loading Qty(40HQ)	265	192	147
<b>Indoor unit</b>			
Dimensions(W*D*H)	805*194*285	957*213*302	1040*220*327
Net weight(KG)	8.2	11.4	13.2
<b>Outdoor unit</b>			
Dimensions(W*D*H)	720*270*495	805*330*554	890*342*673
Net weight(KG)	26.5	37.6	53
Number of rows radiator	1	1.6	1.6



R410A | GMCC



R410A

Refrigerant



High Efficiency



Timer Mode



Healthy Filter



Operation in low temperature



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

**Model name**

**GG-MS30 VITALLY**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

**Cooling**

Capacity(Btu/h)

30000

Rated current(A)

11.7

EER(W/W)

3.3

**Heating**

Capacity(Btu/h)

30500

Rated current(A)

10.9

COP(W/W)

3.66

**Compressor & Features**

Type

ROTARY

Brand

**GMCC**

Indoor air flow(m3/h)

1460

Indoor sound level(dB(A))

40

Refrigerant type

R410A

Loading Qty(40HQ)

96

**Indoor unit**

Dimensions(W\*D\*H)

1260\*283\*362

Net weight(KG)

21.8

**Outdoor unit**

Dimensions(W\*D\*H)

946\*410\*810

Net weight(KG)

63.9

Number of rows radiator

2



T3 | R410A | HIGHLY



Ampere Control



Inverter



T3



Healthy Filter



Auto Restart



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name

GG-TF60000D TITANUM

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Amper Levels(L1,L2,L3)

L1 ( 8 A) - L2 ( 12 A) - L3( 15 A)

Cooling

Capacity(Btu/h)

60000

Rated current(A)

/

EER(W/W)

2

Heating

Capacity(Btu/h)

62000

Rated current(A)

26.7

COP(W/W)

3.60

Compressor & Features

Type

ROTARY

Brand

HIGHLY

Indoor air flow(m3/h)

2100

Indoor sound level(dB(A))

49

Refrigerant type

R410A

Loading Qty(40HQ)

45

Indoor unit

Dimensions(W\*D\*H)

1918 x600x390

Net weight(KG)

/

Outdoor unit

Dimensions(W\*D\*H)

1000×400×1250

Net weight(KG)

/

Number of rows radiator

3





T3 | R410A | GMCC



R410A

Refrigerant



High Efficiency



65°C

T3



Healthy Filter



Auto Restart



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name

GG-TF36000H ULTRA

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

Capacity(Btu/h)

36000

Rated current(A)

17.3

EER(W/W)

2.4

Heating

Capacity(Btu/h)

36500

Rated current(A)

14.1

COP(W/W)

12.3

Compressor & Features

Type

Rotary

Brand

GMCC

Indoor air flow(m3/h)

1680

Indoor sound level(dB(A))

40

Refrigerant type

R410A

Loading Qty(40HQ)

62

Indoor unit

Dimensions(W\*D\*H)

600\*390\*1918

Net weight(KG)

51

Outdoor unit

Dimensions(W\*D\*H)

984\*421\*804

Net weight(KG)

69

Number of rows radiator

2



T3 | R410A | HIGHLY



R410A

Refrigerant



High Efficiency



65°C

T3



Healthy Filter



Auto Restart



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name

GG-TF36000 ULTRA

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

Capacity(Btu/h)

36000

Rated current(A)

17.7

EER(W/W)

2.4

Heating

Capacity(Btu/h)

38000

Rated current(A)

14.6

COP(W/W)

12.3

Compressor & Features

Type

Rotary

Brand

HIGHLY

Indoor air flow(m3/h)

1900

Indoor sound level(dB(A))

39

Refrigerant type

R410A

Loading Qty(40HQ)

54

Indoor unit

Dimensions(W\*D\*H)

600\*390\*1918

Net weight(KG)

55

Outdoor unit

Dimensions(W\*D\*H)

976\*421\*804

Net weight(KG)

59

Number of rows radiator

2



T3 | R410A | Copeland



R410A

Refrigerant



Scroll  
Compressor



65°C

T3



Healthy  
Filter



Auto  
Restart



Golden  
Fin



Turbo  
Mode



Rapid  
Cooling



Quiet



4-Way auto  
Swing

Model name

GG-MF36000DC SCROLL

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

36000

Capacity(Btu/h)

19.4

Rated current(A)

2.29

EER(W/W)

Heating

Capacity(Btu/h)

/

Rated current(A)

/

COP(W/W)

/

Compressor & Features

Type

SCROLL

Brand

Copeland

Indoor air flow(m3/h)

1690

Indoor sound level(dB(A))

62

Refrigerant type

R410A

Loading Qty(40HQ)

42

Indoor unit

Dimensions(W\*D\*H)

600\*455\*1934

Net weight(KG)

59.0

Outdoor unit

Dimensions(W\*D\*H)

900\*350\*1170

Net weight(KG)

87.5

Number of rows radiator

2



T3 | R410A | SANYO



R410A



Scroll  
Compressor



65°C

T3



Healthy  
Filter



Auto  
Restart



Golden  
Fin



Turbo  
Mode



Rapid  
Cooling



Quiet



4-Way auto  
Swing

Model name

GG-TF48000D SCROLL

Power supply(V-Ph-Hz)

380V , 50Hz , 3Ph

Cooling

Capacity(Btu/h)

48000

Rated current(A)

20.2

EER(W/W)

3.30

Heating

Capacity(Btu/h)

18.9

Rated current(A)

3.60

COP(W/W)

Compressor & Features

Type

SCROLL

Brand

SANYO

Indoor air flow(m3/h)

1950

Indoor sound level(dB(A))

41

Refrigerant type

R410A

Loading Qty(40HQ)

45

Indoor unit

Dimensions(W\*D\*H)

1918\*600\*390

Net weight(KG)

55

Outdoor unit

Dimensions(W\*D\*H)

1000×400×1250

Net weight(KG)

105

Number of rows radiator

2



T3 | R410A | LG



R410A



Scroll Compressor



65°C

T3



Healthy Filter



Auto Restart



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name

GG-MF6000D SCROLL

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

60000

Capacity(Btu/h)

10.1

Rated current(A)

3.30

EER(W/W)

Heating

Capacity(Btu/h)

60000

Rated current(A)

9.67

COP(W/W)

3.66

Compressor & Features

Type

SCROLL

Brand

LG

Indoor air flow(m3/h)

2470

Indoor sound level(dB(A))

50

Refrigerant type

R410A

Loading Qty(40HQ)

40

Indoor unit

Dimensions(W\*D\*H)

600x455x1934

Net weight(KG)

59.3

Outdoor unit

Dimensions(W\*D\*H)

952x415x1333

Net weight(KG)

105.2

Number of rows radiator

2



T3 | GMCC

-   
High Efficiency
-   
R22
-   
65°C  
T3
-   
Healthy Filter
-   
Auto Restart
-   
Golden Fin
-   
Turbo Mode
-   
Rapid Cooling
-   
Quiet
-   
Easy Installation

Model name	GG-MW9000C ULTRA	GG-MW12000C ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
<b>Cooling</b>		
Capacity(Btu/h)	9000	12000
Rated current(A)	4.5	7.0
EER(W/W)	2.6	2.08
<b>Heating</b>		
Capacity(Btu/h)	/	/
Rated current(A)	/	/
COP(W/W)	/	/
<b>Compressor &amp; Features</b>		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow(m3/h)	360	450
Indoor sound level(dB(A))	47	46
Refrigerant type	R22	R22
Loading Qty(40HQ)	572	342
<b>Indoor unit</b>		
Dimensions(W*D*H)	450*535*346	600*560*380
Net weight(KG)	27	36
<b>Outdoor unit</b>		
Dimensions(W*D*H)	/	/
Net weight(KG)	/	/
Number of rows radiator	/	/



T3 | GMCC

-   
High Efficiency
-   
R22
-   
65°C  
T3
-   
Healthy Filter
-   
Auto Restart
-   
Golden Fin
-   
Turbo Mode
-   
Rapid Cooling
-   
Quiet
-   
Easy Installation

Model name	GG-MW18000C ULTRA	GG-MW24000 ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
<b>Cooling</b>		
Capacity(Btu/h)	18000	24000
Rated current(A)	11.02	12.5
EER(W/W)	1.92	1.90
<b>Heating</b>		
Capacity(Btu/h)	/	24000
Rated current(A)	/	15.7
COP(W/W)	/	0.89
<b>Compressor &amp; Features</b>		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow(m3/h)	730	805
Indoor sound level(dB(A))	50	55
Refrigerant type	R22	R22
Loading Qty(40HQ)	255	255
<b>Indoor unit</b>		
Dimensions(W*D*H)	660*680*428	660*680*428
Net weight(KG)	52	56.5
<b>Outdoor unit</b>		
Dimensions(W*D*H)	/	/
Net weight(KG)	/	/
Number of rows radiator	/	/

# GENERAL GOLD

## AIR CONDITIONERS

# 2023

## CATALOGUE

- نصب و ارسال رایگان
- 5 سال گارانتی کپرسور، 24 ماه قطعات
- پرداخت درب منزل (سراسر ایران)
- تحویل فوری (سراسر ایران)

General-Gold.ir

02128429982