

SPSN Series

Stainless Steel Submersible Drainage Pumps

SPSN is stretched stainless steel submersible pump. It is widely used in domestic, commercial and industrial applications. The robust design, all metal parts in contact with the pumped liquid are made of stainless steel, makes it ideal for rough environments. Cylinder water-cooled design can efficiently prevent motor from overheating after long-time operation.




Application

- Rainwater, drainage water, flood water
- Effluents from viaducts, underpasses, etc.
- Water from rivers, lakes, pond, pool and ditch
- Mine enterprises, aquariums, construction sites and seawater transport.

Operating Conditions

Max submersible depth: 5m
Liquid temperature up to +40°C
Ambient temperature up to +40°C
Liquid PH range: 4-10
Max diameter of solid: 0.2mm

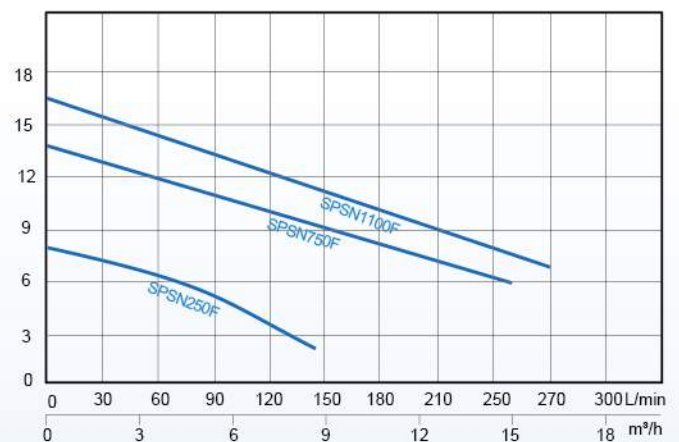

SPSN

Model	Power kW	Outlet mm	Voltage V/Hz	Max.Flow L/min	Max.Head m	G.W kg	Dimension cm
SPSN250F	0.25	40	220/50	140	8	6.5	19.0×19.0×30.0
SPSN750F	0.75	40	220/50	250	14	16.5	23.5×27.5×40.3
SPSN1100F	1.1	40	220/50	270	16	17.5	23.5×27.5×40.3