

Coming Soon

Mikasa Power Unit Series

FAMCO

هایپر صنعت

Tamping Rammer

Power Unit Series



- Selectable three speeds according to the roadbed condition and the work



- Start and stop can be done with the push of a switch.

NEW
MT-e55 (75kg)



- VAS handle reduces hand vibration and protects electronic components.



- Protector/fan guard to protect motor/harness.




- Original Robust Bellows



- Original Rugged Foot



- Storage box for quick manual, etc.



model	weight (kg)	dimensions (mm)	plate size (mm)	jumping stroke (mm)	impact force kN (kgf)	impact number per min.	power source kW (PS)
MT-e55	*75	H : 1,040 W : 350 L : 715	W1 : 265 L1 : 340	30-70	10.8 (1,100)	574-639	Honda DC Power Unit GXE2.0 1.6kW (2.2PS)

* incl. power unit battery.

FAMCO
هایپر صنعت



TAMPING RAMMER

Tamping Rammer (MTX series)	09
Tamping Rammer (MT series)	10
Trench Rammer	11
Diesel Rammer	11
Mikasa Carry	11

4 Stage Air Cleaner System






Large Twin Cyclone Air Cleaner

Large twin cyclone air cleaner has **300%** the dust holding capacity of our previous designs. (MTXseries)



Bahrain

Easy maintenance

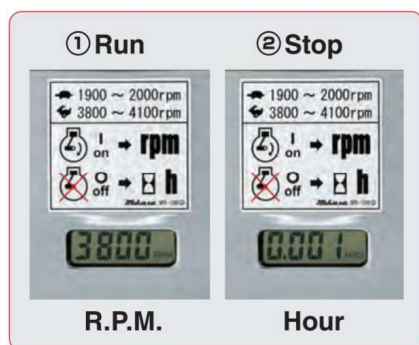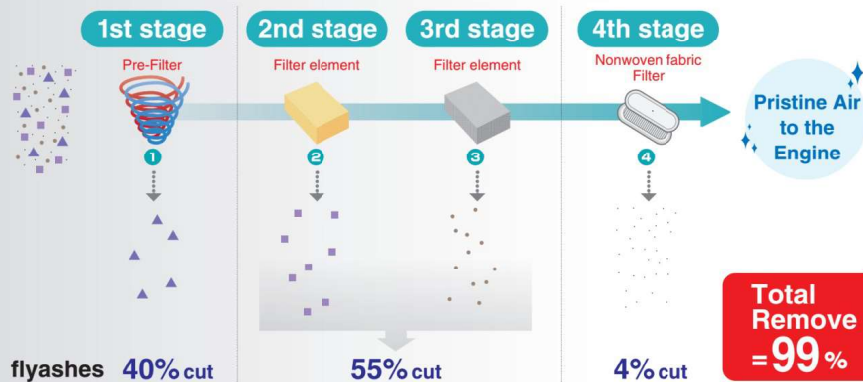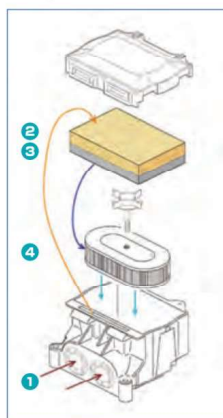

2 in 1 Tacho Hour Meter

① **Engine R.P.M.**
When it is running, it shows R.P.M. and you can check it easily.

② **Operating Time**
When it is stopped, it shows Total Operating time and managing its runtime is easy.

360° Protection



Engine Protection A

Protect the engine from rain and dust. (MT-55-66-77)



Engine Protection B C

The material of the side guard and engine guard is made of highly durable, superior shock-resistant resin that protects the entire surface of the engine.

Power-Packed Rammer



Outstanding Operability



VAS Handle

Tamping Rammer utilizes a newly designed Vibration Absorbing System Handle that reduces **30 or 40 %** for vibration transferred to your hands (compared to our normal handle models) to work more efficiency.



Throttle Lever with fuel cutoff mechanism interlocked kill-switch



**Reliable
Responsible
Ready to Rental**



Original Robust Bellows

Our bellows designed with meshed-pattern inner wall delivers an extremely stable tamping stroke that resists twisting.



Original Rugged Foot

Mikasa's original foot is metal sheet assembly made from wear resistant and high tensile strength steel.

laminated Beech wood

Tamping Rammer

MTX series

- The newly designed clutch drum is designed to automatically eject wear particles via centrifugal force.
- The shock rubber of handle has a pin to prevent falling down when the rubber is worn out.



● Large Twin Cyclone Air Cleaner



● VAS Handle

MTX-50 (60kg)



● EVAPO Certificate



● Tacho Hour Meter



● Throttle Lever with fuel cut off mechanism interlocked kill switch



● Engine Guard



MTX-60 (64kg)



MTX-70 (75kg)



+ Option

■ Trench Foot



For MTX-60•MT-55

W (mm)	H (mm)
114-165	340

For MTX-70•MT-66•77

W (mm)	H (mm)
114-165-200	340

For MTR-40H

W (mm)	H (mm)
100	305
120	500-800

MTX Specifications

model	weight (kg)	dimensions (mm)	plate size (mm)	jumping stroke (mm)	impact force kN (kgf)	impact number per min.	fuel tank capacity (lits)	power source kW (PS)
MTX-50	60	H : 1,025 W : 350 L : 713	W1 : 265 L1 : 340	40-70	10.3 (1,050)	644-695	2.5	Honda GX100 gasoline max. output 2.1(2.9)
MTX-60	64				13.6 (1,390)			Honda GX100 gasoline max. output 2.1(2.9)
MTX-70	75	H : 1,027 W : 350 L : 788	W1 : 285 L1 : 340	50-80	14.9 (1,520)			Honda GXR120 gasoline max. output 2.7(3.6)
MTX-80	93				15.6 (1,590)			Honda GXR120 gasoline max. output 2.7(3.6)

Tamping Rammer


MT series



MT-55H (62kg)



MT-66HL (72kg)
MT-66HRL (72kg)

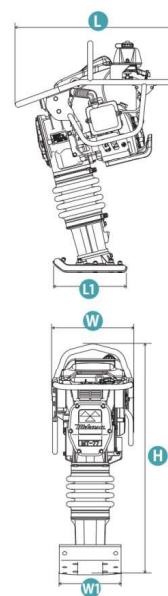

MT Specifications

model	weight (kg)	dimensions (mm)	plate size (mm)	jumping stroke (mm)	Impact force kN (kgf)	Impact number per min.	fuel tank capacity (lits)	power source kW (PS)
MT-55H	62	H : 1,035 W: 370 L : 730	W1 : 265 L1 : 340	30-70	9.8 (1,000)	644-695	2.0	Honda GX100 gasoline max. output 2.1 (2.9)
MT-66HL	72	H : 1,070 W: 375 L : 740	W1 : 285 L1 : 340	50-80	12.7 (1,300)			Honda GXR120 gasoline max. output 2.7 (3.6)
MT-66HRL					13.7 (1,400)			
MT-77HRL	77							

Trench Rammer

MTR-40H (47kg)



Diesel Rammer

MTX-85DY (93kg)



● VAS Handle



● Large Twin Cyclone

MTR Specifications

model	weight (kg)	dimensions (mm)	plate size (mm)	jumping stroke (mm)	impact force kN (kgf)	impact number per min.	fuel tank capacity (lits)	power source kW (PS)
MTR-40H	47	H : 1,110 W : 370 L : 620	W1 : 150 L1 : 270	40-55	5.4 (550)	644-695	2.0	Honda GX100 gasoline max. output 2.1 (2.9)


MTX Specifications

model	weight (kg)	dimensions (mm)	plate size (mm)	jumping stroke (mm)	impact force kN (kgf)	impact number per min.	fuel tank capacity (lits)	power source kW (PS)
MTX-85DY	93	H : 1,063 W : 410 L : 740	W1 : 285 L1 : 340	50-80	15.7 (1,600)	656-698	3.3	Yanmar L48N diesel max. output 3.5 (4.7)

Mikasa Carry

NEW

CART-RAMMER (11.0kg)



movie

MC-1B (8.0kg) (for Multi purpose)



movie



● Hook
Easy to adjust



Cart Specifications

model	weight (kg)	dimensions (mm)	hook width (mm)	loading capacity (kg)
MC-1B	8.0	H : 1,065 W : 588	137 (inside) 243 (outside)	100

model	weight (kg)	dimensions (mm)
CART-RAMMER	11.0	H : 260 W : 490 L : 260

※ To use "CART-RAMMER", it need to be assembled grip except for MTX-series.

