

FIL+REG+LUB New deal



Highly reliable heavy-duty piston-operated FRL unit.

- Stability of the set pressure as the upstream pressure varies
- Metal bowl with external sight glass
- Semi-automatic and automatic condensate drain
- Lubrication proportional to flow rate
- Micrometric lubrication regulation
- Activation guaranteed with low flow rates

Refer to the sections on the single modules for a further description, components and other technical data.




TECHNICAL DATA		FRL ND 1/4"	FRL ND 3/8"	FRL ND 1/2"	FRL ND 3/4"	FRL ND 1"
Threaded port		1/4"	3/8"	1/2"	3/4"	1"
Setting range	bar	0 to 8 - 0 to 12		0 to 8 - 0 to 12		0 to 8 - 0 to 12
Degree of filtration	µm	4 - 20 - 50		4 - 20 - 50		4 - 20 - 50
Max. inlet pressure	MPa	1.8		1.8		1.8
	bar	18		18		18
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	NI/min	140	1300		1900	2000
	scfm	5	46		68	71
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	NI/min	400	2000		3600	3700
	scfm	14.2	71		128	132
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50		50		50
	°F	122		122		122
Weight	kg	1	2.5		4	
Wall fixing screws		M4 x 40	M4 x 55		M6 x 75	
Fluid		Compressed air				
Note on use		The maximum inlet pressure for the version with RA automatic condensate drainage must not exceed 10 bar. Do not take air from pressure gauge ports.				

UNITS

FIL+REG+LUB New deal

DIMENSIONS

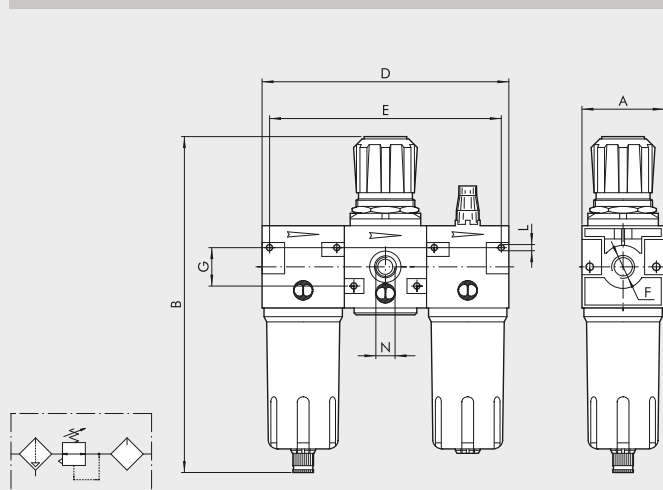

	FRL ND 1/4"	FRL ND 3/8"	FRL ND 1/2"	FRL ND 3/4"	FRL ND 1"
Threaded port F	1/4"	3/8"	1/2"	3/4"	1"
A	42	60		80	
B	190	245		332	
RA	-	249		336	
SAC	194	249		336	
D	126	180		240	
E	116	166		226	
G	20	28		44	
L	M4 hole	M4 hole		M6 hole	
N (pressure gauge port)	1/8"	1/8"		1/4"	

SYNOPTIC, SIZES AND VERSIONS

FRL ELEMENT	1/4 THREADED PORT	4 DEGREE OF FILTRATION	08 SETTING RANGE	RMSA CONDENSATE DRAIN
FRL	1/4 3/8 1/2 3/4 1	4 = 4 µm 20 = 20 µm 50 = 50 µm	08 = 0 to 8 bar 012 = 0 to 12 bar	RMSA SAC RMSA SAC RA RMSA RA

RMSA: drain with manual condensate discharge and automatic discharge at zero pressure.
 RA: automatic drain with condensate discharge, independent of pressure and flow rate.
 SAC: automatic drain with condensate discharge.
 Operates by depression – requires variable air take-offs.

ORDERING CODES

Code	Description	Code	Description	Code	Description
FRL 1/4"		FRL 3/8"		FRL 3/4"	
1224029	FRL 1/4 4 08 RMSA	1324029	FRL 3/8 4 08 RMSA	1524017	FRL 3/4 4 08 RMSA
1224409	FRL 1/4 4 08 SAC	1324033	FRL 3/8 4 08 RA	1524021	FRL 3/4 4 08 RA
1224030	FRL 1/4 20 08 RMSA	1324409	FRL 3/8 4 08 SAC	1524018	FRL 3/4 20 08 RMSA
1224410	FRL 1/4 20 08 SAC	1324030	FRL 3/8 20 08 RMSA	1524022	FRL 3/4 20 08 RA
1224032	FRL 1/4 50 08 RMSA	1324034	FRL 3/8 20 08 RA	1524020	FRL 3/4 50 08 RMSA
1224412	FRL 1/4 50 08 SAC	1324410	FRL 3/8 20 08 SAC	1524024	FRL 3/4 50 08 RA
1224053	FRL 1/4 4 012 RMSA	1324032	FRL 3/8 50 08 RMSA	1524029	FRL 3/4 4 012 RMSA
1224413	FRL 1/4 4 012 SAC	1324036	FRL 3/8 50 08 RA	1524033	FRL 3/4 4 012 RA
1224054	FRL 1/4 20 012 RMSA	1324412	FRL 3/8 50 08 SAC	1524030	FRL 3/4 20 012 RMSA
1224414	FRL 1/4 20 012 SAC	1324053	FRL 3/8 4 012 RMSA	1524034	FRL 3/4 20 012 RA
1224056	FRL 1/4 50 012 RMSA	1324057	FRL 3/8 4 012 RA	1524032	FRL 3/4 50 012 RMSA
1224416	FRL 1/4 50 012 SAC	1324413	FRL 3/8 4 012 SAC	1524036	FRL 3/4 50 012 RA
		1324054	FRL 3/8 20 012 RMSA	FRL 1"	
		1324058	FRL 3/8 20 012 RA	1624017	FRL 1 4 08 RMSA
		1324414	FRL 3/8 20 012 SAC	1624021	FRL 1 4 08 RA
		1324056	FRL 3/8 50 012 RMSA	1624018	FRL 1 20 08 RMSA
		1324060	FRL 3/8 50 012 RA	1624022	FRL 1 20 08 RA
		1324416	FRL 3/8 50 012 SAC	1624020	FRL 1 50 08 RMSA
		FRL 1/2"		1624024	FRL 1 50 08 RA
		1424029	FRL 1/2 4 08 RMSA	1624029	FRL 1 4 012 RMSA
		1424033	FRL 1/2 4 08 RA	1624033	FRL 1 4 012 RA
		1424409	FRL 1/2 4 08 SAC	1624030	FRL 1 20 012 RMSA
		1424030	FRL 1/2 20 08 RMSA	1624034	FRL 1 20 012 RA
		1424034	FRL 1/2 20 08 RA	1624032	FRL 1 50 012 RMSA
		1424410	FRL 1/2 20 08 SAC	1624036	FRL 1 50 012 RA
		1424032	FRL 1/2 50 08 RMSA		
		1424036	FRL 1/2 50 08 RA		
		1424412	FRL 1/2 50 08 SAC		
		1424053	FRL 1/2 4 012 RMSA		
		1424057	FRL 1/2 4 012 RA		
		1424413	FRL 1/2 4 012 SAC		
		1424054	FRL 1/2 20 012 RMSA		
		1424058	FRL 1/2 20 012 RA		
		1424414	FRL 1/2 20 012 SAC		
		1424056	FRL 1/2 50 012 RMSA		
		1424060	FRL 1/2 50 012 RA		
		1424416	FRL 1/2 50 012 SAC		