

mAP lite

The mAP lite is our smallest wireless access point. It is barely larger than a matchbox, we even had to use a special Ethernet port to match its slim profile.



You can carry it anywhere: use as a travel router to extend that hotel internet to all your devices, or as a client device to improve your laptop signal range, the tiny mAP lite will be always with you.

FAMCO
www.famcocorp.com



It can also serve as a simple configuration tool for your servers, if there is no ethernet on your mobile device.

The mAP lite is a dual chain 802.11 b/g/n device and operates in 2 GHz.




Specifications

Product code	RBmAPL-2nD
CPU	QCA9533
CPU nominal frequency	650 MHz
CPU core count	1
Size of RAM	64 MB
10/100 Ethernet ports	1
Wireless	2.4 GHz 802.11b/g/n, dual-chain
Wireless regulations	Specific frequency range can be limited by country regulations
PoE in	Passive and 802.3af/at (+4,5/-7,8 or +3,6/-1,2)
Supported input voltage	5 V (USB); 10 - 60 V (PoE in - 802.3af/at or passive)
Dimensions	48 x 49 x 11 mm
License level	4
Operating System	RouterOS
Max Power consumption	3.5 W

Wireless specifications

Rate (2.4 GHz)	Tx	Rx
1MBit/s	22	-96
11MBit/s	22	-89
6MBit/s	20	-93
54MBit/s	18	-74
MCS0	20	-93
MCS7	16	-71

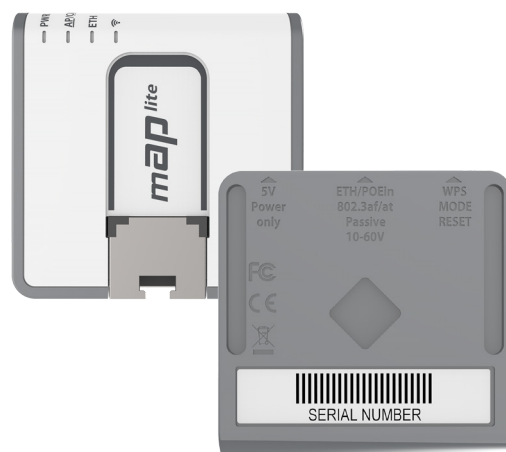

Included



5 V 1 A power
adapter



K-44 mount kit