



Technical Data Sheet

Previous Name: Shell Tivela S

# Shell Omala S4 WE 220

- Extra Protection & Life
- Energy Saving
- Worm Drive Applications

## Advanced Synthetic Industrial Gear Oil

Shell Omala S4 WE is an advanced synthetic heavy duty industrial worm drive gear oil formulated using specially selected polyalkylene glycol base fluids and additives. It offers outstanding lubrication performance under severe operating conditions, including improved energy efficiency, long service life and high resistance to micro-pitting.

### DESIGNED TO MEET CHALLENGES

#### Performance, Features & Benefits

##### ■ Long oil life - maintenance saving

Shell Omala S4 WE is formulated to provide excellent oxidation and thermal stability, extending lubricant life and resisting the formation of harmful oxidation products at high operating temperatures. This helps maintain system cleanliness over extended maintenance intervals.

Shell Omala S4 WE offers the potential to extend service intervals significantly compared to conventional industrial gear oils.

##### ■ Excellent wear protection

Shell Omala S4 WE is formulated to have excellent load carrying capacity providing long component life even under shock loading conditions. It also has a high resistance to micro-pitting. These features provide benefits over mineral oil-based products in terms of gear and bearing component life.

##### ■ Maintaining system efficiency

Shell Omala S4 WE offers improved energy efficiency and lower operating temperatures in worm gear applications. Rig testing has shown efficiency improvements of up to 15% in comparison with mineral oil-based products and 11% over other synthetic hydrocarbon-based lubricants. These results have been confirmed by OEM testing and field experience.

##### ■ Enclosed industrial worm gear systems

Recommended for industrial worm gear reduction systems operating under severe operating conditions, such as high load, very low or elevated temperatures and wide temperature variations.

##### ■ Extended life systems

Shell Omala S4 WE is particularly recommended for certain systems where maintenance is infrequent or systems are inaccessible (eg yaw gears in wind turbine installations).

##### ■ Other applications

Shell Omala S4 WE oils are suitable for lubrication of bearings and other components in circulating and splash-lubricated systems.

Shell Omala S4 WE is not recommended for the lubrication of components manufactured from aluminium or aluminium alloys. For highly-loaded spur and helical gears the Shell Omala "G" series oils are recommended.

For automotive hypoid gears, the appropriate Shell Spirax Oil should be used.

#### Specifications, Approvals & Recommendations

- David Brown S1.53.105 G
- Fully approved by Bonfiglioli
- ISO 12925-1 Type CKE
- Ansi/Agma 9005-E02 (EP)

For a full listing of equipment approvals and recommendations, please consult your local Shell Technical Helpdesk, or the OEM Approvals website.

#### Main Applications



## Compatibility & Miscibility

### ■ Seal & Paint Compatibility

High quality epoxy paints are recommended, as polyalkylene glycols will tend to attack certain conventional paints. Shell Omala S4 WE has been found to be satisfactory with nitrile and Viton seal materials, although Viton seals are preferred.

### ■ Change-over Procedure

Shell Omala S4 WE contains polyalkylene glycols and is not compatible with mineral oils or most other synthetic lubricant types. Care should be taken when changing from such products to Shell Omala S4 WE.

The system should be flushed with the minimum quantity of Shell Omala S4 WE, operating under no load and draining whilst warm. Ideally, seals exposed to mineral oils should also be replaced. Inspect the lubricant after a few days use. Ensure that oil systems are clean and free from contamination.

Shell Omala S4 WE is also not miscible with some other polyalkylene glycols, so caution is needed when topping-up. Generally the preference is to avoid mixtures by draining and refilling.

## Typical physical characteristics

Properties	Method	Shell Omala S4 WE
Viscosity Grade	ICO 3448	220
Kinematic Viscosity @40°C mm <sup>2</sup> /s		222
Kinematic Viscosity @100°C mm <sup>2</sup> /s		34.4
Viscosity Index	ISO 2909	203
Flash Point °C	ISO 2592 (COC)	278
Pour Point °C	ISO 3016	-39
density @15°C kg/m <sup>3</sup>	ISO 12185	1074
FZG Load Carrying Test failure load stage	DIN 51354-2 A/8.3/90	>12

These characteristics are typical of current production. Whilst future production will conform to Shell's specification, variations in these characteristics may occur.

## Health, Safety & Environment

- Guidance on Health and Safety is available on the appropriate Material Safety Data Sheet, which can be obtained from <http://www.epc.shell.com/>

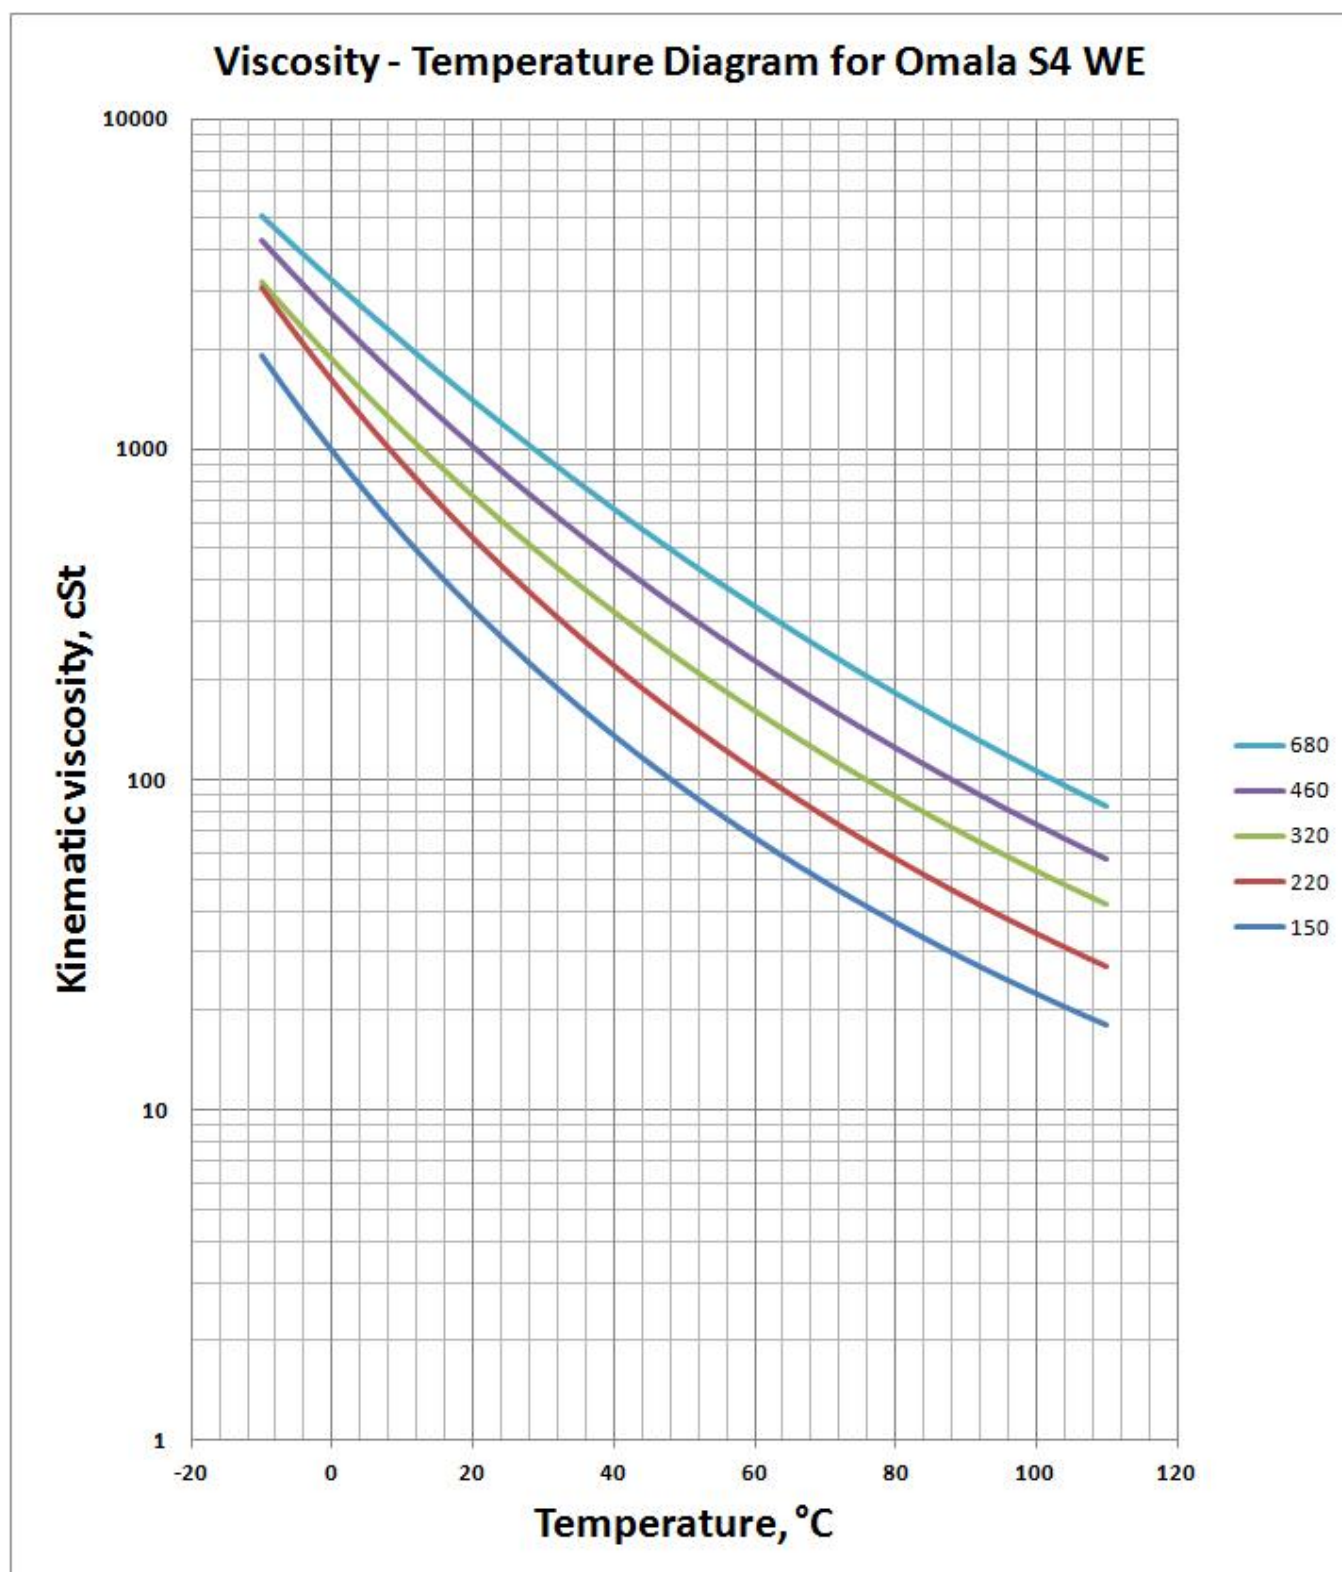
### ■ Protect the Environment

Take used oil to an authorised collection point. Do not discharge into drains, soil or water.



## Additional Information

### ■ Advice

Advice on applications not covered here may be obtained from your shell representative.



 [www.famcocorp.com](http://www.famcocorp.com)  
 E-mail: [info@famcocorp.com](mailto:info@famcocorp.com)  
 @famco\_group

 Tel: ۰۲۱-۴۸۰۰۰۰۴۹  
 Fax: ۰۲۱-۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)  
 روی پالایشگاه نفت پارس، پلاک ۱۲



Previous Name: Shell Spirax G 140

# Shell Spirax S2 G 140

*High Quality API GL-4 Oil for Manual Transmissions and Gear Sets*

Spirax S2 G 140 is an automotive gear lubricant containing multi-functional additives required for mild extreme pressure conditions

## DESIGNED TO MEET CHALLENGES

### Performance, Features & Benefits

- **Comprehensive components**  
Specially selected additives impart good anti-wear, anti-rust characteristics and oxidation stability.

### Main Applications



- **Manual gearboxes**  
Spirax S2 G 140 provides excellent lubrication of manual gearboxes of motorcycles, passenger cars and commercial vehicles (on and off road) operating under high speed/low torque and low speed/high torque conditions. Suitable for gearboxes fitted with synchromesh.

### • Rear axles

Suitable for applications presenting conditions of medium severity, such as some light duty commercial vehicles, passenger cars and motorcycles. Not suitable for heavy duty hypoid axles.

### Specifications, Approvals & Recommendations

- API Service Classification GL-4

For a full listing of equipment approvals and recommendations, please consult your local Shell Technical Helpdesk.

### Typical Physical Characteristics

Properties			Method	Shell Spirax S2 G 140
SAE Viscosity Grade			SAE J 306	140
Kinematic Viscosity	@40°C	mm <sup>2</sup> /s	ISO 3104	340
Kinematic Viscosity	@100°C	mm <sup>2</sup> /s	ISO 3104	25.1
Viscosity Index			ISO 2909	96
Density	@15°C	kg/m <sup>3</sup>	ISO 12185	918
Flash Point (COC)			ISO 2592	199
Pour Point			ISO 3016	-9

These characteristics are typical of current production. Whilst future production will conform to Shell's specification, variations in these characteristics may occur.

### Health, Safety & Environment

#### • Health and Safety

Shell Spirax S2 G 140 is unlikely to present any significant health or safety hazard when properly used in the recommended application and good standards of personal hygiene are maintained.

Avoid contact with skin. Use impervious gloves with used oil. After skin contact, wash immediately with soap and water.

Guidance on Health and Safety is available on the appropriate Material Safety Data Sheet, which can be obtained from <http://www.epc.shell.com/>

- **Protect the Environment**

Take used oil to an authorised collection point. Do not discharge into drains, soil or water.

**Additional Information**

- **Advice**

Advice on applications not covered here may be obtained from your Shell representative.